2015 Bench Products

Test & Measurement Solutions

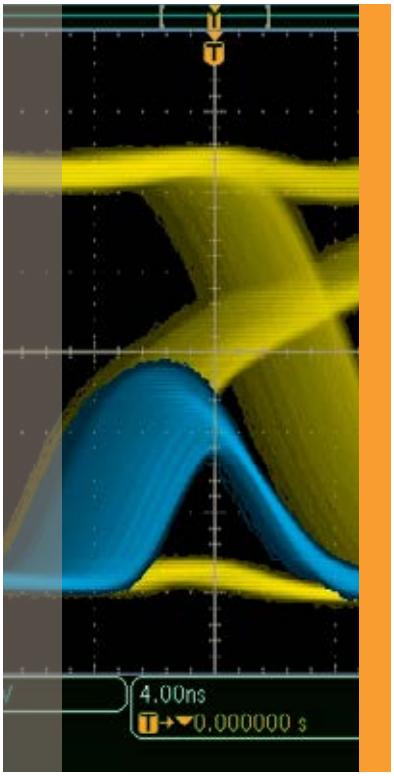

TESTEQUITY
Authorized Tektronix Distributor

Tektronix
KEITHLEY
A Tektronix Company

6 Instruments. 1 Scope. Infinite Versatility.

The 6-in-1 MDO3000 Mixed Domain Oscilloscope with a spectrum analyzer. Starting at $3,420.*

Designs have evolved, integrating analog, digital and RF technologies. Now, it's the oscilloscope's turn. Introducing the MDO3000 Mixed Domain Oscilloscope. Featuring a spectrum analyzer, function generator and more, it's the only scope that comes with the instruments you use most, built-in. It's also upgradeable, enabling you to add instruments and increase bandwidth as your needs grow. So you get unlimited versatility at a starting price that's anything but limiting.

Win one at **tek.com/oneisthenewsix**

6 Advanced Instruments Built In

- **Oscilloscope**: 100 MHz-1 GHz models, 2 or 4 channels, 5 GS/s sample rate, 10 Mpoint record length
- **Spectrum Analyzer**: 9 kHz-3 GHz with 3 GHz wide capture bandwidth
- **Logic Analyzer**: 16 channels, 121 ps timing resolution
- **Arbitrary/Function Generator**: 50 MHz, 13 standard plus arbitrary waveforms
- **Protocol Analyzer**: Serial data trigger, decode and analysis
- **Digital Voltmeter**: 4-digits resolution

*Starting price includes an oscilloscope, spectrum analyzer and digital voltmeter. Other instruments and bandwidth may be added for additional cost.

© 2015 Tektronix, Inc.

Tektronix®

New Products

MDO3000 Series

This scope features six integrated instruments to capture analog, digital and RF signals with one scope. And add instruments, analysis functions and bandwidth as your needs change.



RSA306 USB Spectrum Analyzer

The RSA306 USB Spectrum Analyzer delivers full-featured spectrum analysis with 9 kHz to 6.2 GHz frequency coverage at half the cost of a standard solution.

It's compact, weighs just 1.3 pounds, takes little space on your bench, and fits easily in your hand, bag, pocket or tool belt. It runs with the full-featured SignalVu-PC Vector Signal Analysis (VSA) Software, which is now a free download!

- **Powerful** – Real-time analysis capability and 9 kHz to 6.2 GHz frequency coverage
- **Affordable** – Less than half the cost of a conventional unit, plus free SignalVu-PC Vector Signal Analysis (VSA) Software
- **Portable** – USB Spectrum Analyzer ready to connect to a PC with USB 3.0
- **Customizable** – Create custom setups on your PC without worrying about losing your settings
- **Programmable** – Use the programmatic interface to SignalVu-PC or write your own measurement applications with the Applications Programming Interface.

DMM7510 7½-Digit Graphical Sampling Multimeter

The DMM7510 combines all the advantages of a precision digital multimeter, a graphical touchscreen display, and a high speed, high resolution digitizer to create an industry first: a graphical sampling multimeter. The digitizer gives the DMM7510 unprecedented signal analysis flexibility; the five-inch capacitive touchscreen display makes it easy to observe, interact with, and explore measurements with "pinch and zoom" simplicity. This combination of high performance and high ease of use offers unparalleled insight into your test results.

For an in-depth look at all of our products, including demos and 360-degree product explorers, please visit www.tektronix.com.

All information on www.tektronix.com supersedes all other information.

4 Education Solutions
5-6 Service Solutions
7-12 **Oscilloscope Selection Guide**
Mixed Signal and Mixed Domain
13 MSO/DPO2000B Series
14 MDO3000 Series
15 MDO4000B Series
16 MSO/DPO4000B Series
Advanced Signal Analysis
17 MSO/DPO5000B Series
Basic
18 TBS1000B Series
19 TBS1000B-EDU Series
20 TBS1000 Series
Battery Powered and Handheld
21 THS3000 Series
22 TPS2000B Series
TDS
23 TDS2000C Series
24 TDS3000C Series
25 **Probes and Accessories**
26 **Signal Generator Selection Guide**
27 AFG1000
28 AFG2000
29 AFG3000C Series
30 TSG4100A Series
TekSmartLab™
31 TSL3000B, TBX3000A
Spectrum Analyzers
32 RSA306 USB Spectrum Analyzer
33 **RF Power Meters Selection Guide**
34 PSM3000, 4000 and 5000 Series
35 **SourceMeter® SMU Instruments Selection Guide**
36-37 Model 2450/2460
38 Series 2400
39 Series 2600B
40 Series 2650A
41 **Power Analyzer Selection Guide**
42 PA1000 Series
43 PA4000 Series
44 **Digital Multimeters Selection Guide**
45 Keithley Models 2000, 2100, 2110
46 Keithley Models 2001, 2002, 2010
47 Keithley DMM7510
48 Tektronix DMM4020
49 Tektronix DMM4040/4050
50 **Data Acquisition Selection Guide**
51 Series 2700
52 Series 3700A
53 **Ultra-Sensitive Measurement Instrument Selection Guide**
54 2182A Nanovoltmeter
55 6220/6221 Current Sources
56 6485, 6487 Picoammeters, 6482 Picoammeter & Voltage Source
57 6514/6517B/6430 Electrometers
58-59 **Power Supplies Selection Guide**
60 PWS2000 Series
61 PWS4000 Series
62 2200 Programmable Single Channel DC Power Supplies with Remote Sensing
63 Model 2231A-30-3 Triple-Channel DC Power Supply
64 2220/2230 Programmable Multiple Channel DC Power Supplies with Remote Sensing
65 Series 2260B Programmable DC Power Supplies
66 Series 2280S Precision Measurement DC Power Supplies
67 Series 2268 850W DC Power Supplies
68 2290 High Voltage Power Supplies
69 2300 Portable Device Battery/Charger Simulators
70 2303/2304A High Speed Power Supplies
71 **Frequency Counter/Timers Selection Guide**
72 FCA3100/3000 Series
73 MCA3000 Series

Education Solutions

Tektronix provides a complete product portfolio to prepare students today for the real-life measurements of tomorrow. Our unique set of bench solutions includes the industry's best test and measurement instruments from oscilloscopes, power supplies, DMMs, generators, and spectrum analyzers to the industry's first network-based instrument management solution for teaching labs. So, whether learning basic design skills or progressing to more advanced electrical engineering topics, students get practical, hands-on experience for the real world now on the instruments they'll be using in the real word later.

TekSmartLab™

TekSmartLab is the industry's first network-based instrument management solution for teaching labs that brings a more efficient lab experience.

See page 31

TBS1000B-EDU

Meet the world's first dedicated teaching oscilloscope; the TBS1000B-EDU. Not only does it deliver the performance you expect to see in a Tektronix scope, it comes with an innovative courseware feature that allows students to review lab material, follow step by step instructions and document results, all on the oscilloscope. We couldn't make engineering easier, so we made it easier to teach and learn.

See page 19

AFG1000 Series

The AFG1000 Series Arbitrary/ Function Generator offers the best price performance ratio in its class. It's tailored for educational users with 25 MHz bandwidth, 2 output channels, and 1 mVp-p to 10 Vp-p output amplitude across full bandwidth. It generates all kinds of waveforms needed in a lab.

See page 27

2231A-30-3

The Model 2231A-30-3 Triple Channel DC Power Supply can output a total of 195W of power, providing the power levels needed to energize a wide range of circuits and devices for benchtop work. Two channels can supply up to 30V at 3A each; the third channel can provide up to 5V at 3A. The Model 2231A-30-1 does not compromise on performance or convenience features, offering the versatility and ease of use you need, so it can be the only DC power supply on your bench.

See page 63

DMM2110

These cost effective, high precision instruments offer 5.5- and 6.5-digit accuracy and are ideal for a wide range of manual, semi-automatic, and production test applications. They can be used as stand-alone benchtop instruments and as components in test systems.

See page 45

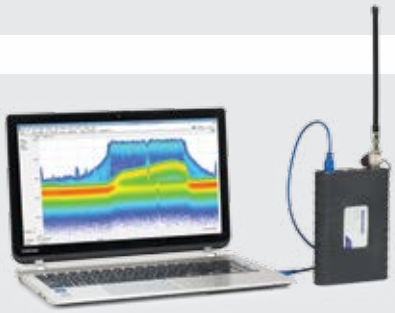

RSA306

The RSA306 offers full-featured spectrum analysis at an unmatched price. Using the latest in commercial interfaces and available computing power, the RSA306 separates signal acquisition from measurement, dramatically lowering the cost of instrument hardware. Data analysis, storage and replay is performed on your personal computer, tablet or laptop which makes processing upgrades easy.

See page 32

The Tektronix Service Advantage

Tektronix offers unequalled expertise, global reach and a customer-centric approach with every service option. From our full suite of Factory-Certified service plans for Tektronix equipment to our Multi-Vendor Service (MVS) calibration, we can ensure optimal performance for your entire inventory of test and measurement instruments.

Tektronix Service Highlights

- **Tektronix Factory Experts**
  Access to the engineering expertise that designed and built your products to ensure they are in peak performance. Our support engineers hold an average of 20 years of training and experience.
- **Comprehensive and Thorough Treatment**
  Software updates, safety and reliability modifications, and cosmetic enhancements are included if applicable. Products are returned to you in "like-new" condition. The Tektronix network of service centers offers worldwide support.
- **Efficiency and Convenience**
  Our team of professionals focus on getting your instruments back to you as soon as possible, minimizing your downtime and increasing your operating efficiency.
- **Flexible Repair and Calibration Service**
  Tektronix offers you the choice of a cost effective, flexible service package to meet your specific business needs.

Tektronix Factory-Certified Service Plans

Silver Care

- Choose between a 3- or 5-year extended warranty plan
- No purchase orders, quotes, or approval delays – one phone call away starts the repair process
- Covers equipment, parts, labor and transportation
- Includes applicable software, safety and reliability updates
- Faster repair time than without coverage (average is 5 days faster)

Silver Care Packages

- All the benefits of our popular Silver Care Plan in a convenient take-home package
- Each package includes a unique activation code to effortlessly initiate and manage your service coverage online
- May be purchased any time during the original warranty period

Gold Care

- Choose between a 3- or 5-year extended warranty plan
- Loaner product of equal or higher performance shipped within 24 hours
- Priority access to Global Tektronix Customer Call Center for technical support
- 30% discount on scheduled factory-certified calibration
- Coverage of user-caused EOS and ESD damage
- Typical downtime of 48 hours or less

Platinum Care

- Custom-tailored plan with a typical downtime of less than 1 hour
- Identically configured spare products dedicated to your facility
- On-site calibration event and repair coverage
- Priority access to technical support, and flexible contract duration and payment terms

Calibration

- Choose from multi-year contracts and single event calibrations
- Accredited and traceable calibration
- Adjustments included to restore performance
- Applicable software, safety, and reliability updates
- Calibration records retention

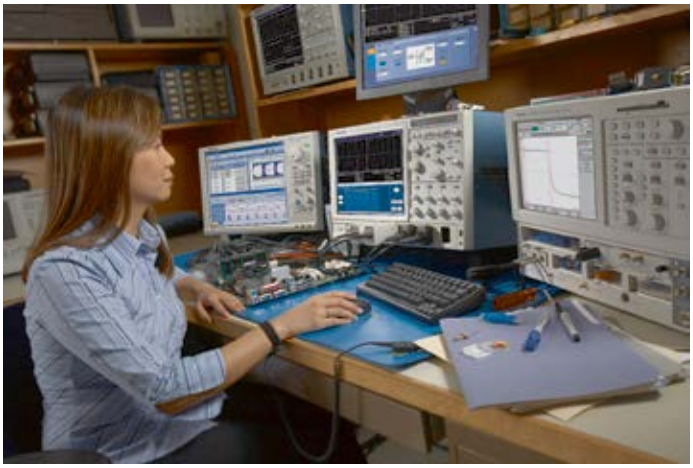

Multi-Vendor Service

Comprehensive Calibration and Repair for All Your Test, Measurement and Control Equipment

- Service for more than 140,000 instruments from over 9,000 manufacturers
- Broadest scope of accreditation
- 100+ global points of service
- 1 million calibrations annually

Performance

Calibration is the cornerstone of measurement confidence. Now Tektronix can manage 100% of your calibration requirements, irrespective of product brand or origin. Our multi-vendor service tools simplify your calibration management program, minimizing downtime and improving operational efficiency.

Quality & Accuracy

Our comprehensive quality system is unmatched. Choose from multiple NIST traceable certificate options, including ANSI Z540.1, ISO/IEC 17025 and ISO 9001:2008. Our customers have direct access to the quality they expect from Tektronix' 65 years as an industry leader in test, measurement and monitoring solutions.

Optimize Asset Availability & Utilization

Tektronix provides industry-leading calibration and repair turnaround time on more than 140,000 products from over 9,000 manufacturers. The CalWeb® Asset Management System allows you to actively manage any downtime required for regular equipment maintenance and provides you with online, enterprise-wide instrument visibility.

Industry Leader

Tektronix is the industry leading provider of calibration services for the life science, aerospace, and defense industries. With consistent high quality and comprehensive service, customers have turned to Tektronix, making us their first choice for outsourced calibration needs.

Global Reach with Local Presence

Tektronix has the most extensive global network of resources. With more than 100 points of service and 1,100 highly trained experts, our unmatched suite of capabilities and services are available locally to most of the world's research and manufacturing centers.

For more information on Tektronix multi-vendor service, visit
service-solutions.tektronix.com
Or call us at 1-800-438-8165

Oscilloscopes

Oscilloscope Selection Guides, Pages 8–13

Choosing Your Oscilloscope

Tektronix offers oscilloscopes for many different applications and uses. To help you choose the right scope for your needs, the most common criteria for selecting a scope are listed below, along with helpful tips for determining your requirements.

1 Bandwidth

All oscilloscopes have a low-pass frequency response that rolls off at higher frequencies. Oscilloscope bandwidth is specified as being the frequency at which a sinusoidal input signal is attenuated to 70.7% of the signal's true amplitude – the -3 dB point. Your oscilloscope must have sufficient bandwidth to capture all relevant frequency components of your signal. If you regularly work with digital signals, it may be easier to consider bandwidth by comparing signal and oscilloscope rise time specifications. Use an oscilloscope with a rise time specification five times faster than your signal rise time to keep error below 2%.

Rule: Bandwidth > 5 x Highest Signal Frequency

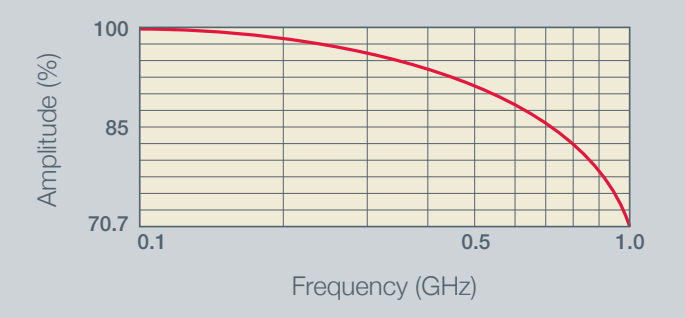

Figure 1: Typical frequency response curve for a general purpose oscilloscope

2 Sample Rate

The faster an oscilloscope samples, the greater the resolution and detail of the displayed waveform, and the less likely that critical information or events will be lost. Tektronix recommends at least 5X oversampling to ensure signal details are captured and to avoid aliasing.

Rule: Sample Rate > 5 x (Highest Frequency Component)

3 Record Length

Record length is the number of samples the oscilloscope can digitize and store in a single acquisition. Since an oscilloscope can store only a limited number of samples, the waveform duration – or length of "time" captured – will be inversely proportional to the oscilloscope's sample rate. A longer record length enables a longer time window to be captured with high resolution.

Rule: Captured Time = (Record Length) / (Sample Rate)

4 Digital Channels and Spectrum Analyzer Input

Today's oscilloscopes offer more than just analog channels for system-level troubleshooting of complex designs.

- If you need to analyze a parallel bus or multiple serial buses, the Tektronix MSO Series of mixed signal oscilloscopes and MDO Series of mixed domain oscilloscopes offer 16 digital channels and up to 4 analog channels for analyzing multiple signals at once.
- If you are working with RF signals, the Tektronix MDO Series of mixed domain oscilloscopes offers a built-in spectrum analyzer for time-correlated analysis of analog, digital and RF signals.

5 Features and Analysis Capability

Tektronix oscilloscopes offer a range of features and analysis capabilities. When choosing your scope, you should review available triggers, waveform search tools, automated measurements, and analysis packages such as serial bus analysis, jitter and power analysis to ensure they meet your needs.

Advanced Signal Analysis Oscilloscopes

	MSO/DPO5000B
Additional Resources	DATA SHEET VIRTUAL TOUR
Channels	4 analog channels; 16 digital channels (MSO5000B)
Bandwidth	350 MHz to 2 GHz
Spectrum Analyzer Frequency Range	--
Sample Rate	5 GS/s to 10 GS/s (analog); 60.6 ps (16.5 GS/s) MagniVu™ (digital)
Max Record Length	Up to 250 Mpoints
Trigger Types	Edge, Sequence, Logic, Pulse Width, Glitch, Runt, Timeout, Transition, Set-up and Hold, Rise/Fall Time, Video, I^2C*, SPI*, USB (Low, Full, High)*, RS-232/422/485/UART*, Parallel (MSO5000B), Visual Trigger *Optional
Optional Serial Bus Decode and Analysis	SR-AERO: MIL-STD 1553 SR-AUTO: CAN/LIN/FlexRay SR-COMP: RS-232/422/485/UART SR-DPHY: MIPI D-PHY SR-EMBD: I^2C, SPI SR-ENET: 10/100Base-T Ethernet SR-USB: USB VNM: CAN, LIN
Connectivity	USB Host (x6), USB Device, LAN (10/100/1000 Base-T Ethernet, LXI Class C Compliant), Video Out, GPIB* *Optional
Waveform Math and Analysis	53 Automated Measurements, Waveform and Screen Cursors, Arithmetic and Advanced Waveform Math, FFT, Measurement Statistics, Waveform Histograms, Waveform Limit Testing **Optional:** BRR: BroadR-Reach Compliance Test; DDRA: DDR Memory Bus Analysis; DJA: DPOJET Advanced Jitter and Eye Diagram Analysis; ET3: Ethernet Compliance Test Solution; MTM: Mask Testing; PWR: Power Analysis; SignalVu Vector Signal Analysis; USB: USB Compliance Test Solution; MOST: MOST 50/150 Compliance Test Solution; HSIC: HSIC Electrical Validation; USBPWR: USB Power Adapter/ EPS Compliance Automated Test Solution
Software	--
Battery Operation	--
Upgrade	▪ Add 16 digital channels ▪ Add extended record length, up to 250 Mpoints ▪ Add serial bus compliance testing ▪ Add measurements and analysis (power, jitter, limit/mask) ▪ Add serial bus triggering and decode
Starting Price	$12,300

Mixed Signal and Mixed Domain Oscilloscopes

	MSO/DPO2000B	MDO3000
Additional Resources	DATA SHEET	DATA SHEET, VIRTUAL TOUR
Channels	2, 4 analog channels; 16 digital channels (MSO2000B)	2, 4 analog channels; 16 digital channels (with MDO3MSO option)
Bandwidth	70 MHz to 200 MHz	100 MHz to 1 GHz
Spectrum Analyzer Frequency Range	--	Standard: 9 kHz to Analog Bandwidth Optional: 9 kHz to 3 GHz
Sample Rate	1 GS/s (analog); 1 GS/s (digital, only 1 pod); 500 MS/s (digital, both pods)	2.5 GS/s to 5 GS/s (analog); 121.2 ps (8.25 GS/s) MagniVu™ (digital)
Max Record Length	1 Mpoints	10 Mpoints
Trigger Types	Edge, Logic, Pulse Width, Runt, Set-up and Hold, Rise/Fall Time, Video, I²C*, SPI*, CAN*, LIN*, RS-232/422/485/UART*, Parallel (MSO2000B) *Optional	Edge, Sequence, Logic, Pulse Width, Runt, Timeout, Set-up and Hold, Rise/Fall Time, Video, Extended Video, I²C*, SPI*, CAN*, LIN*, FlexRay*, RS-232/422/485/UART*, I²S/LJ/RJ/TDM*, MIL-STD-1553*, USB 2.0*, Parallel (with MDO3MSO option) *Optional
Optional Serial Bus Decode and Analysis	DPO2AUTO: CAN and LIN DPO2COMP: RS-232/422/485/UART DPO2EMBD: I²C, SPI DPO2BND: Enables DPO2AUTO, DPO2COMP, DPO2EMBD	MDO3AERO: MIL-STD-1553 MDO3AUDIO: I²S, LJ, RJ, TDM MDO3AUTO: CAN and LIN MDO3COMP: RS-232/422/485/UART MDO3EMBD: I²C, SPI MDO3FLEX: FlexRay MDO3USB: USB2.0 MDO3BND: Enables MDO3AERO, MDO3AUDIO, MDO3AUTO, MDO3COMP, MDO3EMBD, MDO3FLEX, MDO3LMT, MDO3PWR, MDO3USB
Connectivity	USB Host, USB Device, GPIB*, Optional DPO2CONN Module: LAN (10/100 Base-T Ethernet) and Video Out *Optional	USB Host (x2), USB Device, LAN (10/100 Base-T Ethernet), Video Out, GPIB* *Optional
Waveform Math and Analysis	29 Automated Measurements, Waveform and Screen Cursors: Arithmetic Waveform Math, FFT	30 Automated Measurements, Waveform and Screen Cursors, Arithmetic and Advanced Waveform Math, FFT, Measurement Statistics **Optional:** MDO3PWR: Power Analysis MDO3LMT: Limit/mask test MDO3BND: Enables MDO3AERO, MDO3AUDIO, MDO3AUTO, MDO3COMP, MDO3EMBD, MDO3FLEX, MDO3LMT, MDO3PWR, MDO3USB
Software	PC communications software: OpenChoice® Desktop	PC Communications Software: OpenChoice® Desktop
Battery Operation	--	--
Upgrade	▪ Add serial bus triggering and decode	▪ Increase bandwidth ▪ Add Arbitrary/Function generator ▪ Add 16 digital channels ▪ Increase spectrum analyzer maximum frequency to 3 GHz ▪ Add measurements and analysis (power, limit/mask) ▪ Add serial bus triggering and decode
Starting Price	$1,290	$3,420

Mixed Signal and Mixed Domain Oscilloscopes

	MDO4000B	MSO/DPO4000B
Additional Resources	DATA SHEET VIRTUAL TOUR	DATA SHEET VIRTUAL TOUR
Channels	4 analog channels; 16 digital channels; 1 spectrum analyzer input	2, 4 analog channels; 16 digital channels (MSO4000B)
Bandwidth	100 MHz to 1 GHz (analog)	100 MHz to 1 GHz
Spectrum Analyzer Frequency Range	9 kHz - 3 GHz or 9 kHz - 6 GHz (MDO4000B only)	--
Sample Rate	2.5 GS/s to 5 GS/s (analog); 60.6 ps (16.5 GS/s) MagniVu™ (digital)	2.5 GS/s to 5 GS/s (analog); 60.6 ps (16.5 GS/s) MagniVu™ (digital)
Max Record Length	Up to 20 Mpoints	Up to 20 Mpoints
Trigger Types	RF Power Level**, Edge, Sequence, Logic, Pulse Width, Runt, Timeout, Set-up and Hold, Rise/Fall Time, Video, Extended Video*, I²C*, SPI*, USB*, Ethernet*, CAN*, LIN*, FlexRay*, RS-232/422/485/UART*, I²S/LJ/RJ/TDM*, MILSTD-1553*, Parallel *Optional **With optional MDO4TRIG module, RF power level can be used as source for Pulse Width, Timeout, Runt, Logic, Sequence	Edge, Sequence, Logic, Pulse Width, Runt, Timeout, Set-up and Hold, Rise/Fall Time, Video, Extended Video*,I²C*, SPI*, USB*, Ethernet*,CAN*, LIN*, FlexRay*, RS-232/422/485/UART*, I²S/LJ/RJ/TDM*, MIL-STD-1553*, Parallel (MSO4000B) *Optional
Optional Serial Bus Decode and Analysis	DPO4AERO: MIL-STD-1553 DPO4AUDIO: I²S, LJ, RJ, TDM DPO4AUTO: CAN and LIN DPO4AUTOMAX: CAN, LIN and FlexRay DPO4COMP: RS-232/422/485/UART DPO4EMBD: I²C, SPI DPO4ENET: Ethernet DPO4USB: USB DPO4BND: Enables DPO4AERO, DPO4AUDIO, DPO4AUTO, DPO4COMP, DPO4EMBD, DPO4ENET, DPO4LMT, DPO4PWR, DPO4USB, DPO4VID	DPO4AERO: MIL-STD-1553 DPO4AUDIO: I²S, LJ, RJ, TDM DPO4AUTO: CAN and LIN DPO4AUTOMAX: CAN, LIN and FlexRay DPO4COMP: RS-232/422/485/UART DPO4EMBD: I²C, SPI DPO4ENET: Ethernet DPO4USB: USB DPO4BND: Enables DPO4AERO, DPO4AUDIO, DPO4AUTO, DPO4COMP, DPO4EMBD, DPO4ENET, DPO4LMT, DPO4PWR, DPO4USB, DPO4VID
Connectivity	USB Host (x4), USB Device, LAN (10/100/1000 Base-T Ethernet, LXI Class C Compliant), Video Out, GPIB* *Optional	USB Host (x4), USB Device, LAN (10/100/1000 Base-T Ethernet, LXI Class C Compliant), Video Out, GPIB* *Optional
Waveform Math and Analysis	45 Automated Measurements, Waveform and Screen Cursors, Arithmetic Waveform Math, Spectrum Math, FFT, Advanced Math, Measurement Statistics, Waveform Histograms **Optional:** DPO4LMT: Limit and Mask Testing MDO4TRIG: Adv. RF Power Level Trigger DPO4PWR: Power Analysis DPO4VID: HDTV and Custom Triggering	42 Automated Measurements, Waveform and Screen Cursors, Arithmetic and Advanced Waveform Math, Measurement Statistics, Waveform Histograms **Optional:** DPO4LMT: Limit and Mask Testing DPO4PWR: Power Analysis DPO4VID: HDTV and Custom Triggering
Software	PC Communications Software: OpenChoice® Desktop Vector Signal Analysis Software: SignalVu-PC	PC Communications Software: OpenChoice® Desktop
Battery Operation	--	--
Upgrade	▪ Add measurements and analysis (power, limit/mask, video, RF trigger) ▪ Add serial bus triggering and decode	▪ Add measurements and analysis (power, limit/mask, video, RF trigger) ▪ Add serial bus triggering and decode
Starting Price	$9,600	$7,250

	Basic Oscilloscopes		Battery Powered Oscilloscopes with Isolated Channels	
	TBS1000	TBS1000B/ TBS1000B-EDU	THS3000	TPS2000B
Additional Resources	DATA SHEET VIRTUAL TOUR	DATA SHEET VIRTUAL TOUR	DATA SHEET VIRTUAL TOUR	DATA SHEET VIRTUAL TOUR
Channels	4	2	4 (isolated)	2, 4 (isolated)
Bandwidth	60 MHz to 150 MHz	50 MHz to 200 MHz	100 MHz to 200 MHz	100 MHz to 200 MHz
Sample Rate	1 GS/s	1 GS/s to 2 GS/s	2.5 GS/s to 5 GS/s	1 GS/s to 2 GS/s
Max Record Length	2.5 k points	2.5 k points	10 k points	2.5 k points
Trigger Types	Edge, Pulse (width), Video	Edge, Pulse (width), Video	Edge, Pulse (width), Event, Video, Non-interlaced	Edge, Pulse (width), Video
Optional Serial Bus Decode and Analysis	--	--	--	--
Connectivity	USB Host, USB Device, GPIB* *Optional	USB Host, USB Device, GPIB* *Optional	USB Host, USB Device	RS-232 (includes RS-232-to-USB Host Serial Cable), Centronics, CompactFlash
Waveform Math and Analysis	16 Automated Measurements, Arithmetic Waveform Math, FFT, Waveform Limit Testing, Automated Datalogging	34 Automated Measurements, Arithmetic Waveform Math, FFT, Dual channel Frequency Counter, Waveform Limit Testing*, TrendPlot™ function*, Automated Datalogging* * Not available on EDU models	21 Automated Measurements, Arithmetic Waveform Math, FFT	11 Automated Measurements, Arithmetic Waveform Math, FFT **Optional:** TPS2PWR1: Power Measurement and Analysis
Software	PC Communications Software: OpenChoice® Desktop, Educator Classroom and Lab Resource CD	PC Communications Software: OpenChoice® Desktop Software, PC Courseware Editor Tool, Product Documentation and Lab Resource CD	PC Communications Software: OpenChoice® Desktop	PC Communications Software: OpenChoice® Desktop
Battery Operation	--	--	One THSBAT Battery Pack Included Standard	One TPSBAT Battery Pack Included Standard
Starting Price	$1,010	$520	$4,310	$3,160

The World's First Dedicated Teaching Oscilloscope

The TBS1000B-EDU Digital Storage Oscilloscope Series is designed specifically to meet the needs of today's schools and universities. It's the first oscilloscope to use the innovative new courseware system that enables educators to seamlessly integrate teaching materials onto an oscilloscope. Along with a powerful PC Courseware Editor Tool and a courseware website, the TBS1000B-EDU supports a complete education ecosystem that uncovers new ways of enhancing the teaching and learning experience.

TDS Series Oscilloscopes

	TDS2000C	TDS3000C
Additional Resources	DATA SHEET VIRTUAL TOUR	DATA SHEET VIRTUAL TOUR
Channels	2, 4	2, 4
Bandwidth	50 MHz to 200 MHz	100 MHz to 500 MHz
Sample Rate	500 MS/s to 2 GS/s	1.25 GS/s to 5 GS/s
Max Record Length	2.5 k points	10 k points
Trigger Types	Edge, Pulse (width), Video	Edge, Logic (Pattern, State), Pulse (Glitch, Width, Runt, Slew Rate), Video, Extended Video*, Comm* *Optional
Optional Serial Bus Decode and Analysis	--	--
Connectivity	USB Host, USB Device, GPIB* *Optional	USB Host, LAN (10Base-T Ethernet) **Optional:** TDS3GV Module: GPIB, RS-232, and Video Out
Waveform Math and Analysis	16 Automated Measurements, Arithmetic Waveform Math, FFT, Waveform Limit Testing, Automated Datalogging	25 Automated Measurements, Arithmetic Waveform Math, FFT **Optional:** TDS3LIM: Limit Testing TDS3TMT: Telecom Mask Testing TDS3VID: HDTV and Custom Video Triggering
Software	PC Communications Software: OpenChoice® Desktop	PC Communications Software: OpenChoice® Desktop
Battery Operation	--	Requires Optional TDS3BATC Battery Pack
Starting Price	$990	$5,590

Tektronix Reference Library

With over 20,000 items in our premium content library, it is likely you can find answers on our website to whatever questions you have. Here is a list of our most popular downloaded content for oscilloscopes. Visit www.tektronix.com to download your copy.

1. XYZs of Oscilloscopes Primer
2. ABCs of Probes Primer
3. Fundamentals of the MDO4000B Series Mixed Domain Oscilloscopes
4. Fundamentals of Signal Integrity Primer
5. Debugging Serial Buses in Embedded Systems Designs Application Note
6. Power Supply Measurement and Analysis Primer

DATA SHEET

MSO/DPO2000B Series

Test more, spend less with an oscilloscope that's packed with features and is also light on price. Measure as many as 20 channels of analog and digital signals. Speed debug with automated serial and parallel bus analysis. Search your entire record instantly with Wave Inspector®. Entry level has never been so powerful.

Product Highlights

- 1 Mpoint record length on all channels
- Over 125 available trigger combinations, including setup/hold, serial packet and parallel data
- Automated search and easy waveform navigation with Wave Inspector®
- 29 automated measurements and FFT analysis
- 5-year warranty



Quickly pan/zoom and automatically search your waveforms with Wave Inspector®.



Automatically trigger, decode and search your serial buses with optional analysis modules.

Models	Analog Channels	Digital Channels	Analog Bandwidth	Analog Sample Rate	Pricing (USD)
DPO2002B	2	--	70 MHz	1 GS/s	$1,290
MSO2002B	2	16	70 MHz	1 GS/s	$2,230
DPO2004B	4	--	70 MHz	1 GS/s	$2,050
MSO2004B	4	16	70 MHz	1 GS/s	$2,920
DPO2012B	2	--	100 MHz	1 GS/s	$1,680
MSO2012B	2	16	100 MHz	1 GS/s	$2,560
DPO2014B	4	--	100 MHz	1 GS/s	$2,440
MSO2014B	4	16	100 MHz	1 GS/s	$3,300
DPO2022B	2	--	200 MHz	1 GS/s	$2,380
MSO2022B	2	16	200 MHz	1 GS/s	$3,260
DPO2024B	4	--	200 MHz	1 GS/s	$2,930
MSO2024B	4	16	200 MHz	1 GS/s	$3,800

Application Modules

Serial Bus Triggering and Protocol Analysis		
DPO2BND	Enables DPO2AUTO, DPO2COMP, DPO2EMBD	$500
DPO2AUTO	Automotive (CAN, LIN)	$500
DPO2COMP	Computer (RS-232)	$500
DPO2EMBD	Embedded (I²C, SPI)	$500

Recommended Accessories

DPO2CONN	Ethernet and Video Out Connectivity Module	$551
119-7465-xx	TekVPI External Power Supply	$89
ACD2000	Soft Carrying Case	$259

Recommended Probes

Passive Voltage Probes		
TPP0200	200 MHz, 300 V CAT II	$59
Active Voltage Probes		
TAP1500*1	10X, 1.5 GHz, ± 8 V	$2,260
Differential Voltage Probes		
TDP0500*1	500 MHz, ± 42 V/± 4.25 V	$3,570
High Voltage Probes		
THDP0200*1	200 MHz, ± 1500 V/± 150 V	$1,870
TMDP0200*1	200 MHz, ± 750 V/± 75 V	$1,870
THDP0100*1	100 MHz, ± 6000 V/± 600 V	$3,170
Current Probes		
TCP2020	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min	$2,470
TCP0030A*1	120 MHz, 30 A DC/30 A RMS/50 A Peak/1 mA Min	$3,750
TCP0150*1	20 MHz, 150 A DC/150 A RMS/500 A Peak/5 mA Min	$4,430

*1 Requires 119-7465-xx TekVPI External Power Supply

Another Product for Consideration

Need an arbitrary/function generator for your project? The MDO3000 Series features six integrated instruments to capture analog, digital and RF signals with one scope.

Need more bandwidth? The MDO3000 Series offers up to 1 GHz analog bandwidth.

Ships with Product

- One TPP0100 100MHz, 10X Passive Probe Per Analog Channel (70 MHz model)
- One TPP0200 200 MHz, 10X Passive Probe Per Analog Channel (100 MHz & 200 MHz models)
- One P6316 16 Channel Logic Probe (MSO only)
- OpenChoice® Desktop Software
- Calibration Certificate, Quick Reference Manual & Documentation on CD, Power Cord
- 5-year Warranty

DATA SHEET

VIRTUAL TOUR

360° VIEW

Product Highlights

- Integrated 6-in-1 oscilloscope that offers a spectrum analyzer, arbitrary function generator, logic analyzer, protocol analyzer and digital voltmeter
- Spectrum Analyzer standard on all models
- 10 Mpoint record length on all channels
- >280,000 wfm/s max. waveform capture rate with FastAcq
- Automated search and waveform navigation with Wave Inspector®



Monitor slowly changing RF events at a glance with spectrogram display.

MDO3000 Series

This scope features six integrated instruments to capture analog, digital and RF signals with one scope. And add instruments, analysis functions and bandwidth as your needs change.

Models	Analog Channels	Digital Channels (Optional)	Analog Bandwidth	Analog Sample Rate	Digital Sample Rate Main/MagniVu™	Spectrum Analyzer Input	Spectrum Analyzer Frequency Range Standard/Optional	Pricing (USD)
MDO3012	2	16	100 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 100 MHz / 9 kHz - 3 GHz	$3,420
MDO3014	4	16	100 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 100 MHz / 9 kHz - 3 GHz	$4,070
MDO3022	2	16	200 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 200 MHz / 9 kHz - 3 GHz	$4,080
MDO3024	4	16	200 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 200 MHz / 9 kHz - 3 GHz	$4,540
MDO3032	2	16	350 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 350 MHz / 9 kHz - 3 GHz	$7,040
MDO3034	4	16	350 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 350 MHz / 9 kHz - 3 GHz	$8,470
MDO3052	2	16	500 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 500 MHz / 9 kHz - 3 GHz	$8,930
MDO3054	4	16	500 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 500 MHz / 9 kHz - 3 GHz	$11,400
MDO3102	2	16	1 GHz	5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 1 GHz / 9 kHz - 3 GHz	$10,700
MDO3104	4	16	1 GHz	5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 1 GHz / 9 kHz - 3 GHz	$14,200

Instrument Options**

MDO3AFG	Arbitrary function generator	$800
MDO3MSO	16 digital channels; includes P6316 digital probe and accessories	$1,500
MDO3SA	Increase spectrum analyzer input frequency range to 9 kHz – 3 GHz	$2,550
MDO3SEC	Add password protected security to enable or disable all communication ports and firmware upgrades	$450

Application Modules

MDO3BND	Enables MDO3AERO, MDO3AUDIO, MDO3AUTO, MDO3COMP, MDO3EMBD, MDO3FLEX, MDO3LMT, MDO3PWR, MDO3USB	$1,150
Serial Bus Triggering and Protocol Analysis		
MDO3AERO	Aerospace (MIL-STD-1553)	$1,150
MDO3AUDIO	Audio (I²S, LJ, RJ and TDM)	$1,150
MDO3AUTO	Automotive (CAN, LIN)	$1,150
MDO3COMP	Computer (RS-232)	$1,150

Application Modules

Serial Bus Triggering and Protocol Analysis		
MDO3EMBD	Embedded (I²C, SPI)	$1,150
MDO3FLEX	Automotive (FlexRay)	$1,150
MDO3USB*	USB 2.0 (LS, FS, HS)	$1,150
Additional Analysis		
MDO3PWR	Power Analysis	$1,450
MDO3LMT	Limit/Mask Test	$800

Recommended Probes

Passive Voltage Probes		
TPP0502	2X, 500 MHz, 300 V CAT II	$652
High Voltage Probes		
TMDP0200	250X/25X, 200 MHz, ± 750 V / ± 75 V	$1,870
THDP0200	1000X/100X, 100 MHz, ± 6000 V / ± 600 V	$1,870
TPP0850	50X, 800 MHz, 2500 V Peak	$821

* USB 2.0 HS only available on 1 GHz analog bandwidth models and only for HS analysis.

** Can be preconfigured from the factory or ordered as stand-along upgrade kits.

Recommended Probes

Current Probes		
TCP0020	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min	$2,630
TCP0030A	120 MHz, 30 A DC/30 A RMS/50 A Peak/1 mA Min	$3,750
TCP0150	20 MHz, 150 A DC/150 A RMS/500 A Peak/5 mA Min	$4,430

Ships with Product

- One Low C Passive Probe Per Channel, TPP1000 on 1 GHz Models, TPP0500B on 350 and 500 MHz Models, TPP0250 on all 100 and 200 MHz Models
- One P6316 16 Channel Logic Probe (with option MDO3MSO only)
- N-to-BNC Adapter
- OpenChoice® Desktop
- Calibration Certificate, Installation and Safety Manual, & Documentation on CD
- Accessory Bag
- Front Panel Lauguage Overlay (if other than English)
- Power Cord
- 3-year Warranty

DATA SHEET

VIRTUAL TOUR

360° VIEW

MDO4000B Series

The new revolutionary oscilloscope with a built-in spectrum analyzer. Capture synchronized analog, digital and RF signals for a complete, time correlated system view of your device. See both time and frequency domains in one glance. View the RF spectrum at any point in time to see how it changes. Quickly and efficiently solve the most complicated design issues—with an oscilloscope as integrated as your designs.

Product Highlights

- The world's first oscilloscope with a built-in spectrum analyzer
- Up to 3 GHz capture bandwidth on the spectrum analyzer input
- Integrated spectral analysis tools: automated and manual markers, spectrogram display, RF vs. time traces
- Advanced modulation analysis: MDO4000B with SignalVu-PC offers industry's widest bandwidth vector signal analyzer
- >340,000 wfm/s max. waveform capture rate with FastAcq

Use it as an oscilloscope OR a spectrum analyzer OR combined to capture synchronized analog, digital and RF signals.



See how your RF spectrum changes over time or device state.

Models	Analog Channels	Digital Channels	Analog Bandwidth	Analog Sample Rate	Digital Sample Rate Main/MagniVu™	Spectrum Analyzer Input	Spectrum Analyzer Frequency Range	Pricing (USD)
MDO4014B-3	4	16	100 MHz	2.5 GS/s	500 MS/s /16.5 GS/s	1	9 kHz – 3 GHz	$9,600
MDO4034B-3	4	16	350 MHz	2.5 GS/s	500 MS/s /16.5 GS/s	1	9 kHz – 3 GHz	$14,000
MDO4054B-3	4	16	500 MHz	2.5 GS/s	500 MS/s /16.5 GS/s	1	9 kHz – 3 GHz	$17,400
MDO4054B-6	4	16	500 MHz	2.5 GS/s	500 MS/s /16.5 GS/s	1	9 kHz – 6 GHz	$21,100
MDO4104B-3	4	16	1 GHz	5 GS/s	500 MS/s /16.5 GS/s	1	9 kHz – 3 GHz	$21,500
MDO4104B-6	4	16	1 GHz	5 GS/s	500 MS/s /16.5 GS/s	1	9 kHz – 6 GHz	$25,700

Application Modules

DPO4BND	Enables DPO4AERO, DPO4AUDIO, DPO4AUTO, DPO4COMP, DPO4EMBD, DPO4ENET, DPO4LMT, DPO4PWR, DPO4USB, DPO4VID	$1,500
Serial Bus Triggering and Protocol Analysis		
DPO4-AERO	Aerospace (MIL-STD 1553)	$1,660
DPO4-AUDIO	Audio (I^2S, LJ, RJ and TDM)	$1,500
DPO4-AUTO	Automotive (CAN, LIN)	$1,500
DPO4-AUTOMAX	Automotive (CAN, LIN, FlexRay)	$5,090
DPO4COMP	Computer (RS-232)	$1,500
DPO4-EMBD	Embedded (I^2C, SPI)	$1,500
DPO4ENET	Ethernet (10BASE-T, 100BASE-TX)	$1,660
DPO4USB[*1]	USB 2.0 (LS, FS, HS)	$1,660
Additional Analysis		
MDO4TRIG	Adv. RF Power Level Triggering	$1,800
DPO4PWR	Power Analysis	$1,850
DPO4LMT	Limit and Mask Testing	$938
DPO4VID	HDTV & Custom Video Triggering	$938
Signal-Vu-PC	Vector Signal Analysis Software	$1,990

Recommended Service

SILV900	5-year Extended Warranty	$1,010

Recommended Probes

Passive Voltage Probes		
TPP1000	10X, 1 GHz, 300 V CAT II	$996
TPP0500B	10X, 500 MHz, 300 V CAT II	$653
TPP0502	2X, 500 MHz, 300 V CAT II	$652
Active Voltage Probes		
TAP1500	10X, 1.5 GHz, ± 8 V	$2,260
Differential Voltage Probes		
TDP0500	50X/5X, 500 MHz, ± 42 V/± 4.2 V	$3,570
TDP1000	50X/5X, 1 GHz, ± 42 V/± 4.2 V	$4,030
High Voltage Probes		
THDP0200	500X/50X, 200 MHz, ± 1500 V/± 150 V	$1,870
TPP0850	50X, 800 MHz, 2500 V Peak	$821
Current Probes		
TCP0030A	120 MHz, 30 A DC/30 A RMS/50 A Peak/1 mA Min	$3,750

Ships with Product

- Four TPP0500B (≤500 MHz models) or TPP1000 (1 GHz models) Passive Voltage Probes
- One P6616 16 Channel Logic Probe
- N-to-BNC Adapter (103-0045-00)
- OpenChoice® Desktop Software, SignalVu PC Software
- Calibration Certificate, Quick Reference Manual & Documentation on CD
- Front Panel Cover, Accessory Bag, Power Cord
- 3-year Warranty

Learn more with "Wi-Fi: Overview of the 802.11 Physical Layer and Transmitter Measurements" primer.

[*1] USB 2.0 HS only available on 1 GHz analog bandwidth models.

DATA SHEET

VIRTUAL TOUR

360° VIEW

Product Highlights

- Up to 20 Mpoint record length on all channels
- >340,000 wfm/s max. waveform capture rate with FastAcq
- Over 125 available trigger combinations, including setup/hold, serial packet and parallel data
- Automated search and easy waveform navigation with Wave Inspector®
- 41 automated measurements and FFT analysis

Ships with one passive probe per analog channel, with up to 1 GHz bandwidth and an industry-best 3.9 pF of capacitive loading.



Automatically trigger, decode and search your serial and parallel bus.

MSO/DPO4000B Series

Debug complex designs faster with an oscilloscope that's as versatile as it is powerful. Measure up to 20 channels of analog and digital signals. Analyze serial and parallel buses. Instantly search your entire record with the time-saving Wave Inspector®. Finally, an oscilloscope that multitasks as well as you do.

Models	Analog Channels	Digital Channels	Bandwidth	Record Length (Max)	Analog Sample Rate (Max)	Digital Sample Rate Main/MagniVu™	Pricing (USD)
DPO4014B	4	--	100 MHz	20M	2.5 GS/s	--	$7,250
MSO4014B	Replaced by MDO4014B-3. All the capabilities of MSO + Spectrum Analyzer						
DPO4034B	4	--	350 MHz	20M	2.5 GS/s	--	$11,000
MSO4034B	Replaced by MDO4034B-3. All the capabilities of MSO + Spectrum Analyzer						
DPO4054B	4	--	500 MHz	20M	2.5 GS/s	--	$14,400
MSO4054B	Replaced by MDO4054B-3. All the capabilities of MSO + Spectrum Analyzer						
DPO4102B-L	2	--	1 GHz	5M	5 GS/s	--	$10,800
DPO4102B	2	--	1 GHz	20M	5 GS/s	--	$13,500
DPO4104B-L	4	--	1 GHz	5M	5 GS/s	--	$14,400
DPO4104B	4	--	1 GHz	20M	5 GS/s	--	$17,600
MSO4102B-L	2	16	1 GHz	5M	5 GS/s	500 MS/s /16.5 GS/s	$14,200
MSO4102B	2	16	1 GHz	20M	5 GS/s	500 MS/s /16.5 GS/s	$17,700
MSO4104B-L	4	16	1 GHz	5M	5 GS/s	500 MS/s /16.5 GS/s	$17,700
MSO4104B*1	4	16	1 GHz	20M	5 GS/s	500 MS/s /16.5 GS/s	$21,900

Application Modules

DPO4BND	Enables DPO4AERO, DPO4AUDIO, DPO4AUTO, DPO4COMP, DPO4EMBD, DPO4ENET, DPO4LMT, DPO4PWR, DPO4USB, DPO4VID	$1,500
Serial Bus Triggering and Analysis		
DPO4AERO	Aerospace (MIL-STD 1553)	$1,660
DPO4-AUDIO*2	Audio (I^2S, LJ, RJ and TDM)	$1,500
DPO4AUTO	Automotive (CAN, LIN)	$1,500
DPO4-AUTOMAX	Automotive (CAN, LIN, FlexRay)	$5,090
DPO4COMP	Computer (RS-232)	$1,500
DPO4EMBD*3	Embedded (I^2C, SPI)	$1,500
DPO4ENET	Ethernet (10Base-T, 100Base-Tx)	$1,660
DPO4USB*4	USB 2.0 (LS, FS, HS)	$1,660

Application Modules

Serial Bus Triggering and Analysis		
DPO4PWR	Power Analysis	$1,850
DPO4LMT	Limit and Mask Testing	$938
DPO4VID	HDTV & Custom Video Triggering	$938

Recommended Probes

Passive Voltage Probes		
TPP0502	2X, 500 MHz, 300 V CAT II	$652
High Voltage Probes		
TMDP0200	200 MHz, ± 750 V/ ± 75 V	$1,870
TPP0850	50X, 800 MHz, 2500 V Peak	$821
Current Probes		
TCP0030A	120 MHz, 30 A DC/ 30 A RMS/50 A Peak/ 1 mA Min	$3,750

Another Product for Consideration

Working with RF? The MDO4000B Series is the world's only oscilloscope with a built-in spectrum analyzer for capturing and analyzing synchronized analog, digital and RF signals.

Ships with Product

- One TPP0500B (≤ 500 MHz models) or TPP1000 (1 GHz models) Passive Voltage Probe Per Analog Channel
- One P6616 16 Channel Logic Probe (MSO only)
- OpenChoice® Desktop Software
- Calibration Certificate, Quick Reference Manual & Documentation on CD
- Front Panel Cover, Accessory Bag, Power Cord
- 3-year Warranty

*1 See the MDO4104B-3 for an MSO + Spectrum Analyzer.
*2 Not available on DPO4102B, DPO4102B-L models.
*3 For SPI, only 2-wire support is available on DPO4102B, DPO4102B-L.
*4 USB 2.0 HS only available on 1 GHz analog bandwidth models.

DATA SHEET

VIRTUAL TOUR

360° VIEW

MSO/DPO5000B Series

Today's faster data rates and tighter timing margins requires an oscilloscope with outstanding signal acquisition performance and analysis capabilities. Tektronix MSO/DPO5000B Series oscilloscopes provide exceptional signal fidelity, with 2 GHz and 10 GS/s sample rate, along with advanced analysis and math capabilities. MSO models include 16 digital timing channels, and all models can be equipped to decode common serial protocols, to provide a comprehensive view of your systems.

Product Highlights

- 350 MHz, 500 MHz, 1 GHz, and 2GHz models
- >250,000 wfm/s max. waveform capture rate with FastAcq™ technology
- 10 GS/s max sampling and 250 Mpoints memory (optional)
- Extensive analysis including jitter/timing and user defined math (i.e., MATLAB)
- Visual tirggering standard with search and mark



Achieve greater than 11 bits vertical resolution with Hi-Res sampling and reduce unwanted noise while capturing signal details.

Perform advanced protocol triggering and decode on mid-speed and low-speed serial and buses (optional).

Models	Analog Channels	Digital Channels	Analog Bandwidth	Analog Sample Rate (4 Channels/2 Channels)	Digital Sample Rate Main/MagniVu™	Pricing (USD)
DPO5034B	4	--	350 MHz	5 GS/s	--	$12,300
MSO5034B	4	16	350 MHz	5 GS/s	500 MS/s /16.5 GS/s	$15,600
DPO5054B	4	--	500 MHz	5 GS/s	--	$15,300
MSO5054B	4	16	500 MHz	5 GS/s	500 MS/s /16.5 GS/s	$18,600
DPO5104B	4	--	1 GHz	5 GS/s /10 GS/s	--	$18,800
MSO5104B	4	16	1 GHz	5 GS/s /10 GS/s	500 MS/s /16.5 GS/s	$22,100
DPO5204B	4	--	2 GHz	5 GS/s /10 GS/s	--	$21,500
MSO5204B	4	16	2 GHz	5 GS/s /10 GS/s	500 MS/s /16.5 GS/s	$24,800

Software Packages

Serial Bus Triggering and Protocol Analysis		
SR-AERO	MIL-STD-1553B	$2,060
SR-AUTO	CAN/LIN/FlexRay	$2,060
SR-COMP	Computer (RS-232)	$2,060
SR-DPHY	MIPI D-PHY	$2,120
SR-EMBD	Embedded (I^2C, SPI)	$2,060
SR-ENET	Ethernet	$2,060
SR-USB	USB 2.0 (LS, FS, HS)	$2,060
Compliance Test		
BRR	BroadR-Reach	$2,060
ET3	Ethernet	$5,990
MOST	MOST50/150	$2,880
USB2	USB 2.0	$2,950
Additional Analysis		
DDRA	DDR Memory	$6,460
DJA	Advanced Jitter Analysis	$4,450
HSIC	HSIC Electrical Characterization	$5,360
PS2, PS3	Power Solution Bundles	Varies
PWR	Power Analysis	$2,300
SVE	SignalVu RF Analysis	$2,020
USBPWR	USB Power Compliance	$1,850

Additional software packages are available. For a complete listing, please visit www.tektronix.com/mso5000

Recommended Probes

Passive Voltage Probes		
TPP1000	10X, 1 GHz, 300 V CAT II	$996
TPP0502	2X, 500 MHz, 300 V CAT II	$652
Active Voltage Probes		
TAP1500	10X, 1.5 GHz, ± 8 V	$2,260
TAP2500	10X, 2.5 GHz, ± 4 V	$3,990
Differential Voltage Probe		
TDP0500	500 MHz, ± 42 V/± 4.2 V	$3,570
TDP1000	1 GHz, ± 42 V/± 4.2 V	$4,030
TDP1500	1.5 GHz, ± 8.5 V/± 850 mV	$4,000
High Voltage Probes		
TMDP0200	200 MHz, ± 750 V/± 75 V	$1,870
THDP0200	200 MHz, ± 1500 V/± 150 V	$1,870
THDP0100	100 MHz, ± 6000 V/± 600 V	$3,170
TPP0850	50X, 800 MHz, 2500 V Peak	$821
Current Probes		
TCP0020	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min	$2,630
TCP0030A	120 MHz, 30 A DC/30 A RMS/50 A Peak/1 mA Min	$3,750
TCP0150	20 MHz, 150 A DC/150 A RMS/500 A Peak/5 mA Min	$4,430

Ships with Product

- Four TPP0500B (350 MHz and 500 MHz models) or TPP1000 (1 GHz and 2 GHz models) Passive Voltage Probes
- One P6616 16 Channel Logic Probe (MSO only)
- Calibration Certificate, Quick Reference Manual & Documentation on CD
- Front Panel Cover, Accessory Bag, Power Cord
- 1-year Warranty

Instrument Options

Record Length		
Opt. 5RL	50M/Ch	$5,560
Opt. 10RL	125M/Ch	$12,100

Limitations apply. See data sheet for full details.

Recommended Service

R3	3-year Extended Warranty	Varies
R5	5-year Extended Warranty	Varies

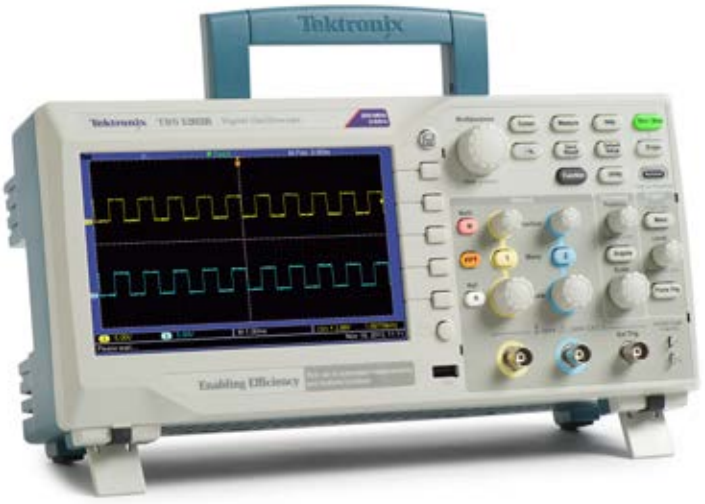

DATA SHEET

VIRTUAL TOUR

360° VIEW

TBS1000B Series

More features, more scope; the TBS1000B is in a class all its own. With up to 200 MHz bandwidth, 34 automated measurements, limit testing, data logging, dual channel frequency counters, waveform trending and sample rates of up to 2 GS/s, the TBS1000B Series is designed for extensive monitoring and analysis activities. It can handle everyday test challenges without challenging your budget.

Product Highlights

- Two channel instruments
- Extensive monitoring capability using TrendPlot™ testing
- Pass/Fail analysis with built in waveform limit testing
- Automated data logging feature
- Up to 2 GS/s sample rate on all channels
- Dual channel frequency counters
- Front-panel USB host port and rear-panel USB device port
- TekSmartLab™ supported



Use the TrendPlot™ function to evaluate signal behavior over extended time periods.



Thoroughly analyze your waveforms with convenient math tools and 34 automated measurements.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate (per channel)	Pricing (USD)
TBS1052B	2	50 MHz	1 GS/s	$550
TBS1072B	2	70 MHz	1 GS/s	$890
TBS1102B	2	100 MHz	2 GS/s	$1,190
TBS1152B	2	150 MHz	2 GS/s	$1,520
TBS1202B	2	200 MHz	2 GS/s	$1,820

Recommended Probes

Passive Voltage Probes		
TPP0201	10X, 200 MHz, 300 V CAT II	$59
TPP0101	10X, 100 MHz, 300 V CAT II	$49
TPP0051	10X, 50 MHz, 300 V CAT II	$25
P2220	10X/1X, 200 MHz/6 MHz, 300 V CAT II/150 V CAT II	$131
High Voltage Probes		
P5200A	500X/50X, 50 MHz, ± 1300 V/± 130 V	$1,010
P5100A	100X, 500 MHz, 2500 V Peak	$488
P6015A	1000X, 75 MHz, 20 kV Peak	$2,000

Recommended Probes

Current Probes		
P6021A	60 MHz, 10.6 A RMS/250 A Peak/10 mA Min	$1,660
P6022	120 MHz, 4 A RMS/100 A Peak/1 mA Min	$1,820
A621	5 Hz to 50 kHz, 1000 A RMS/2000 A Peak/10 mA Min	$682
A622	100 kHz, 100 A DC/71 A RMS/100 A Peak/10 mA Min	$677

Recommended Accessories

TEK-USB-488	GPIB-to-USB converter	$830
AC2100	Soft Carrying Case	$136

Another Product for Consideration

Need an oscilloscope that simplifies the way you distribute lab work to students? The TBS1000B-EDU models have many of the same features and include integrated courseware capabilities.

Ships with Product

- Two TPP0xx1 200 MHz, 100 MHz or 50 MHz Passive Probes
- Certificate of Calibration
- CD with Customer Documentation
- Installation & Safety Manual
- Power Cord
- 5-year Warranty

Learn why a TBS1000B or TDS2000C instrument can be your most reliable and cost effective scope with the "Reliability by Design" technical brief.

DATA SHEET

VIRTUAL TOUR

360° VIEW

TBS1000B-EDU Series

Meet the world's first dedicated teaching oscilloscope; the TBS1000B-EDU. Not only does it deliver the performance you expect to see in a Tektronix scope, it comes with an innovative courseware feature that allows students to review lab material, follow step by step instructions and document results, all on the oscilloscope. We couldn't make engineering easier, so we made it easier to teach and learn.

Product Highlights

- Two channel instruments
- Integrated courseware feature - perform labs directly on the oscilloscope
- Autoset enable/disable capability
- Included PC editor tool for easy lab creation
- Up to 2 GS/s sample rate on all channels
- Dual channel frequency counters
- 34 automated measurements and FFT analysis
- TekSmartLab™ supported

The Courseware Resource Center is an interactive, multi-lingual website where educators can share lab material and ideas.



The FFT function can show both frequency and time domain waveforms simultaneously.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate (per channel)	Pricing (USD)
TBS1052B-EDU	2	50 MHz	1 GS/s	$520
TBS1072B-EDU	2	70 MHz	1 GS/s	$790
TBS1102B-EDU	2	100 MHz	2 GS/s	$1,090
TBS1152B-EDU	2	150 MHz	2 GS/s	$1,420
TBS1202B-EDU	2	200 MHz	2 GS/s	$1,720

Recommended Probes

Passive Voltage Probes		
TPP0201	10X, 200 MHz, 300 V CAT II	$59
TPP0101	10X, 100 MHz, 300 V CAT II	$49
TPP0051	10X, 50 MHz, 300 V CAT II	$25
P2220	10X/1X, 200 MHz/6 MHz, 300 V CAT II/150 V CAT II	$131
High Voltage Probes		
P5200A	500X/50X, 50 MHz, ± 1300 V/± 130 V	$1,010
P5100A	100X, 500 MHz, 2500 V Peak	$488
P6015A	1000X, 75 MHz, 20 kV Peak	$2,000

Recommended Probes

Current Probes		
P6021A	60 MHz, 10.6 A RMS/250 A Peak/10 mA Min	$1,660
P6022	120 MHz, 4 A RMS/100 A Peak/1 mA Min	$1,820
A621	5 Hz to 50 kHz, 1000 A RMS/2000 A Peak/10 mA Min	$682
A622	100 kHz, 100 A DC/71 A RMS/100 A Peak/10 mA Min	$677

Recommended Accessories

TEK-USB-488	GPIB-to-USB converter	$830
AC2100	Soft Carrying Case	$136

Another Product for Consideration

Need more analysis features? The TBS1000B models offer the same great performance and include Trendplot™, data logging and limit test capability.

Ships with Product

- Two TPP0xx1 200 MHz, 100 MHz or 50 MHz, Passive Probes
- Certificate of Calibration
- CD with Customer Documentation
- Education CD with Course Editor SW and Lab Examples
- Installation & Safety Manual
- Power Cord
- 5-year Warranty

Help students master the use of an oscilloscope with the included courseware software and labs.

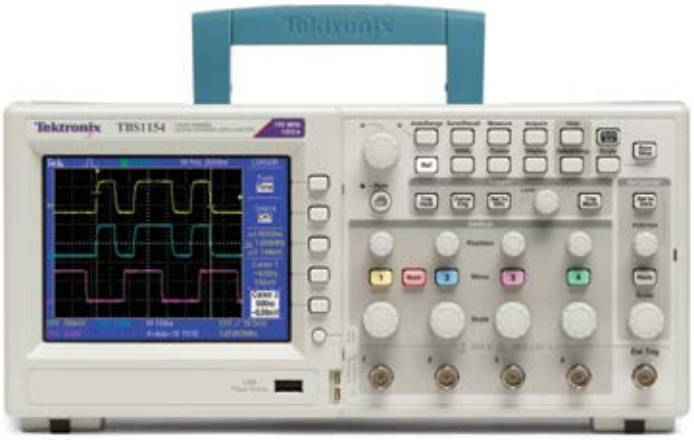

DATA SHEET

VIRTUAL TOUR

360° VIEW

TBS1000 Series

Usually, entry-level instruments are as light in features as they are in price. But Tektronix TBS1000 Series aren't usual instruments. Ideal for students, hobbyists or any person or organization on a tight budget, TBS1000 Series oscilloscopes deliver outstanding performance, including best-in-class digital real-time sampling, pass/fail testing, and familiar, easy-to-use controls. All at a price that's equally impressive.

Product Highlights

- Four channel instruments
- 1 GS/s sample rate on all channels
- 7 inch WVGA high-res display
- 16 automated measurements, and FFT analysis
- Built-in waveform limit testing
- Built-in help system and probe check wizard
- Front-panel USB host port and rear-panel USB device port
- TekSmartLab™ supported



Accurately capture signals with at least 10X oversampling on all channels with Digital Real-Time Sampling technology.

Quickly store and transfer your waveforms and settings with the front panel USB port.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate (per channel)	Pricing (USD)
TBS1064	4	60 MHz	1 GS/s	$1,010
TBS1104	4	100 MHz	1 GS/s	$1,520
TBS1154	4	150 MHz	1 GS/s	$1,830

Recommended Probes

Passive Voltage Probes		
TPP0201	10X, 200 MHz, 300 V CAT II	$59
TPP0101	10X, 100 MHz, 300 V CAT II	$49
P2220	10X/1X, 200 MHz/6 MHz, 300 V CAT II/150 V CAT II	$131
High Voltage Probes		
P5200A	500X/50X, 50 MHz, ± 1300 V/± 130 V	$1,010
P5100A	100X, 500 MHz, 2500 V Peak	$488
P6015A	1000X, 75 MHz, 20 kV Peak	$2,000

Recommended Probes

Current Probes		
P6021A	60 MHz, 10.6 A RMS/250 A Peak/10 mA Min	$1,660
P6022	120 MHz, 4 A RMS/100 A Peak/1 mA Min	$1,820
A621	5 Hz to 50 kHz, 1000 A RMS/2000 A Peak/10 mA Min	$682
A622	100 kHz, 100 A DC/71 A RMS/100 A Peak/10 mA Min	$667
TCP2020	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min	$2,470

Recommended Accessories

1103	TEKPROBE Power Supply	$2,380
AC2100	Soft Carrying Case	$136

Another Product for Consideration

Need a Lifetime Warranty? The TDS2000C Series offers the same great performance as the TBS1000 and includes a Lifetime Warranty.

Ships with Product

- Four TPP0x01 100 MHz or 200 MHz, 10X Passive Probes
- OpenChoice® Desktop Software
- Educator Classroom and Lab Resource CD
- Calibration Certificate, Quick Reference Manual, & Documentation on CD
- Power Cord
- 5-year Warranty

Learn how to accurately capture your signals with the "Be Sure to Capture the Complete Picture" technical brief.

DATA SHEET

VIRTUAL TOUR

360° VIEW

THS3000 Series

Affordable performance in a rugged, portable design. This handheld, battery-powered oscilloscope is packed with features and analysis tools. With up to 5 GS/s sampling rate and four isolated channels that can measure up to 1000 Volts, you can quickly, reliably and accurately evaluate your signal characteristics on the bench or in the field.

Product Highlights

- 4 fully isolated and floating channels
- 21 automated measurements
- 600 VRMS CAT III, 1000 VRMS CAT II rated inputs
- Measurement data logging with Trendplot™ testing
- 7 hours of continuous battery operation



Four isolated input channels easily handle any type of mixed signal inputs.



User-defined limit testing can automatically monitor your signals and output Pass or Fail results.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate	Pricing (USD)
THS3014	4	100 MHz	2.5 GS/s	$4,310
THS3014-TK	4	100 MHz	2.5 GS/s	$4,790
THS3024	4	200 MHz	5 GS/s	$4,850
THS3024-TK	4	200 MHz	5 GS/s	$5,390

Recommended Probes

Passive Voltage Probes		
THP0301 - Y/B/M/G	300 MHz, 10X, 300 V CAT III	$190
High Voltage Probes		
P5150*1	50X, 500 MHz, 2500 V Peak, 1000 V RMS CAT II	$515
P5122	100X, 200 MHz, 1000 V RMS CAT II	$287
Current Probes		
P6021A	60 MHz, 10.6 A RMS/250 A Peak/10 mA Min	$1,660
P6022	120 MHz, 4 A RMS/100 A Peak/1 mA Min	$1,820
A621	5 Hz to 50 kHz, 1000 A RMS/2000 A Peak/10 mA Min	$682
A622	100 kHz, 100 A DC/71 A RMS/100 A Peak/10 mA Min	$677
TCP2020	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min	$2,470

*1 The P5150 is compatible with THS oscilloscopes, but 50X vertical scaling is not offered.

Recommended Accessories

THSBAT	Additional Spare Battery	$325
THSCHG*2	Battery Charger	$108
119-7900-00	AC Power Adapter	$305

*2 Does not include AC power adapter.

Recommended Service

SILV400	5-year Extended Warranty	$453

Another Product for Consideration

For very accurate ripple measurements on high voltage signals, the P5122 probe offers high impedance with minimal capacitive loading.

Ships with Product

- Four THP0301-Y/B/M/G 300 V CAT III, 300 MHz 10X Passive Probes
- OpenChoice® Desktop Software
- USB-A to Mini USB-B Cable for PC Communication
- Lithium-ion Battery with 7 Hour Battery Life
- Calibration Certificate, Installation/Safety Manual, Documentation on CD
- Carrying Handle, Hanging Strap
- ACHHS Soft-sided Carry Case*3, AC Power Adapter with Power Cord
- Hard-sided Travel Case*4
- Soft-sided Probe Case, Two Probe Replacement Accessory Kits*4
- 3-year Warranty

*3 Non-TK models only
*4 TK models only

Learn more with the "Fundamentals of Floating Measurements and Isolated Input Oscilloscopes" application note.



DATA SHEET

VIRTUAL TOUR

TPS2000B Series

Great performance goes beyond the lab. Make floating or differential measurements with up to four isolated channels. Tackle challenging environments with backlit buttons and optional power analysis software. Capture signals with Digital Real-Time Sampling.

Product Highlights

- 10X oversampling on all channels
- 4 isolated analog channels
- 11 automated measurements and FFT analysis
- Optional power analysis software



Safely and easily make floating measurements with the four isolated channels.

Battery pack gives you up to 4 hours of portable operation. Hot-swap the pack for 4 more hours!

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate	Pricing (USD)
TPS2012B	2	100 MHz	1 GS/s	$3,160
TPS2014B	4	100 MHz	1 GS/s	$4,170
TPS2024B	4	200 MHz	2 GS/s	$4,700

Application Modules

TPS2PBND2	TPS2PWR1 Module and Four P5122 Probes	$1,630
TPS2PWR1	Power Measurement and Analysis Module	$707

Recommended Accessories

1103	TEKPROBE Power Supply	$2,380
AC2100	Soft Carrying Case	$136
TPSBAT	Additional Lithium-Ion Battery Pack (one included standard with instrument)	$304
TPSCHG	External Battery Charger	$530

Recommended Service

SILV200	5-year Extended Warranty	Varies

Recommended Probes

Passive Voltage Probes		
TPP0201	10X, 200 MHz, 300 V CAT II	$59
TPP0101	10X, 100 MHz, 300 V CAT II	$49
P2220	10X/1X, 200 MHz/6 MHz, 300 V CAT II/150 V CAT II	$131
High Voltage Probes		
P5150	50X, 500 MHz, 2500 V Peak, 1000 V RMS CAT II	$515
P5122	100X, 200 MHz, 1000 V RMS CAT II	$287
Current Probes		
P6021A	60 MHz, 10.6 A RMS/250 A Peak/10 mA Min	$1,660
P6022	120 MHz, 4 A RMS/100 A Peak/1 mA Min	$1,820
A621	5 Hz to 50 kHz, 1000 A RMS/2000 A Peak/10 mA Min	$682
A622	100 kHz, 100 A DC/71 A RMS/100 A Peak/10 mA Min	$677
TCP2020	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min	$2,470

Another Product for Consideration

For very accurate power measurements, the PA1000 Power Analyzer offers 0.05% basic accuracy.

Ships with Product

- One TPP0101 100 MHz, 10X Passive Probe Per Analog Channel (TPS2012B & TPS2014B)
- One TPP0201 200 MHz, 10X Passive Probe Per Analog Channel (TPS2024B)
- OpenChoice® Desktop Software
- RS-232 to USB Adapter Cable
- One Lithium-Ion Battery with 4-hour Battery Life
- Calibration Certificate, Quick Reference Manual, & Documentation on CD
- Front Panel Cover, AC Adapter with Power Cord
- 3-year Warranty

Learn more with the "Fundamentals of Floating Measurements and Isolated Input Oscilloscopes" application note.

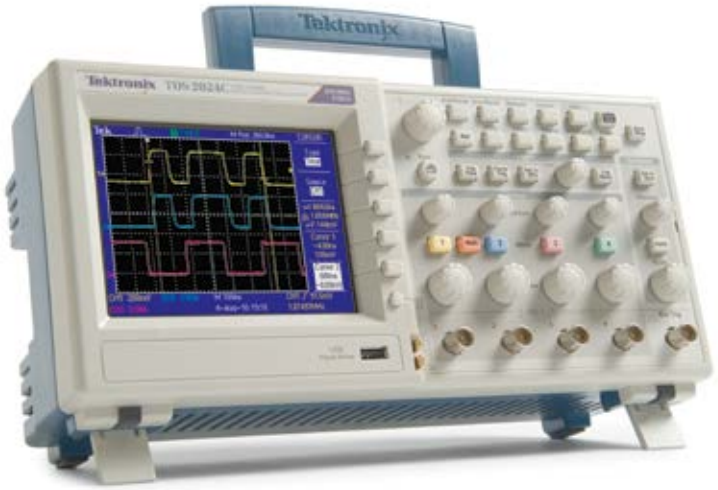

DATA SHEET

VIRTUAL TOUR

360° VIEW

TDS2000C Series

Big performance has never been so small. Featuring Digital Real-Time Sampling, you can trust your scope to accurately capture your signal. Add in USB connectivity, 16 automated measurements and even a built-in help system; this compact oscilloscope helps you get more done in less time. It's true: big things do come in small packages.

Product Highlights

- 10X oversampling on all channels
- Bright color display
- 16 automated measurements and FFT analysis
- Built-in help system and probe check wizard
- Front-panel USB host port and rear-panel USB device port
- Lifetime Warranty*1
- TekSmartLab™ supported



Accurately capture signals with at least 10X over-sampling on all channels with Digital Real-Time Sampling technology.



Easily check if your waveforms pass or fail your specifications with built-in waveform limit testing.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate	Pricing (USD)
TDS2001C	2	50 MHz	500 MS/s	$990
TDS2002C	2	70 MHz	1 GS/s	$1,180
TDS2004C	4	70 MHz	1 GS/s	$1,840
TDS2012C	2	100 MHz	2 GS/s	$1,440
TDS2014C	4	100 MHz	2 GS/s	$2,150
TDS2022C	2	200 MHz	2 GS/s	$2,060
TDS2024C	4	200 MHz	2 GS/s	$2,490

Recommended Probes

Passive Voltage Probes		
TPP0201	10X, 200 MHz, 300 V CAT II	$59
TPP0101	10X, 100 MHz, 300 V CAT II	$49
P2220	10X/1X, 200 MHz/6 MHz, 300 V CAT II/150 V CAT II	$131
High Voltage Probes		
P5200A	500X/50X, 50 MHz, ± 1300 V/± 130 V	$1,010
P5100A	100X, 500 MHz, 2500 V Peak	$488
P6015A	1000X, 75 MHz, 20 kV Peak	$2,000

Recommended Probes

Current Probes		
P6021A	60 MHz, 10.6 A RMS/250 A Peak/10 mA Min	$1,660
P6022	120 MHz, 4 A RMS/100 A Peak/1 mA Min	$1,820
A621	5 Hz to 50 kHz, 1000 A RMS/2000 A Peak/10 mA Min	$682
A622	100 kHz, 100 A DC/71 A RMS/100 A Peak/10 mA Min	$677
TCP2020	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min	$2,470

Recommended Accessories

1103	TEKPROBE Power Supply	$2,380
AC2100	Soft Carrying Case	$136

Ships with Product

- One TPP0x01 100 MHz or 200 MHz, 10X Passive Probe Per Analog Channel
- OpenChoice® Desktop Software
- Calibration Certificate, Quick Reference Manual & Documentation on CD
- Power Cord
- Lifetime Warranty*1

*1 For complete details visit www.tektronix.com/lifetimewarranty

TDS2000 Series

The **TDS2000 Series** is one of the most popular oscilloscopes of all time. It has a proven track record and comes with a lifetime warranty. We are pleased to continue to offer it.

For new applications, make sure you learn about:

MSO/DPO2000B Series Oscilloscopes

- 70, 100 and 200 MHz models
- 2 or 4 analog channels
- 16 digital channels (MSO models)
- 1 Mpoint record length
- Serial bus decoding and triggering options
- 5-year warranty

DATA SHEET

VIRTUAL TOUR

360° VIEW

TDS3000C Series

Performance meets portability. Featuring up to 500 MHz bandwidth and optional battery-powered operation, this oscilloscope is as capable as it is convenient. Capture fast-changing signals with Digital Real-Time Sampling. Maximize efficiency with WaveAlert® Anomaly Detection and 25 automated measurements. Performance and versatility--turns out you can take it with you.

Product Highlights

- 10 kpoints record length on all channels, all the time
- 3,600 wfm/s max. waveform capture rate with DPO technology
- 25 automated measurements and FFT analysis
- Front-panel USB host port and optional rear-panel Ethernet, GPIB, and RS-232 ports

Optional battery pack gives you up to 3 hours of portable operation.



Accurately capture signals with at least 5X over-sampling on all channels with Digital Real-Time Sampling technology.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate	Pricing (USD)
TDS3012C	2	100 MHz	1.25 GS/s	$5,590
TDS3014C	4	100 MHz	1.25 GS/s	$6,820
TDS3032C	2	300 MHz	2.5 GS/s	$8,230
TDS3034C	4	300 MHz	2.5 GS/s	$9,800
TDS3052C	2	500 MHz	5 GS/s	$11,800
TDS3054C	4	500 MHz	5 GS/s	$14,100

Application Modules

TDS3LIM	Limit Testing	$839
TDS3TMT	Telecom Mask Test Triggering	$1,570
TDS3VID	HDTV and Custom Video Triggering	$839

Recommended Accessories

1103	TEKPROBE Power Supply	$2,380
TDS3GV	GPIB, RS-232, and VGA Communications Module	$839
TDS3BATC	Lithium-ion Battery	$685
TDS3ION	Battery Charger	$170
AC3000	Soft Carrying Case	$259
HCTEK4321	Hard Carrying Case (requires AC3000)	$829

Recommended Service

SILV400	5-year Extended Warranty	$453

Recommended Probes

Passive Voltage Probes		
P6139B	10X, 500 MHz, 300 V CAT II	$472
Active Voltage Probes		
P6243	10X, 1 GHz, ± 8 V	$1,130
Differential Voltage Probes		
P6246[*1]	10X/1X, 400 MHz, ± 8.5 V/± 850 mV	$3,620
High Voltage Probes		
P5205A	500X/50X, 100 MHz, ± 1300 V/± 130 V	$1,480
P5210A	1000X/100X, 50 MHz, ± 5600 V/± 560 V	$2,980
P5100A	100X, 500 MHz, 2500 V Peak	$488
Current Voltage Probes		
TCP202A	50 MHz, 15 A DC/10.6 A RMS/50 A Peak/10 mA Min	$2,430

[*1] Requires 1103 TEKPROBE Power Supply

Ships with Product

- One P6139B 500 MHz, 10X Passive Probe Per Analog Channel
- OpenChoice® Desktop Software
- Calibration Certificate, Quick Reference Manual, & Documentation on CD
- Front Panel Cover, Power Cord
- 3-year Warranty

TDS3000 Series

The **TDS3000C Series** performs reliably in test stations around the world. It is also available with a battery pack, making it especially well-suited for field applications that require high bandwidth. We are pleased to continue to offer it.

For new applications, make sure you learn about:

MDO3000 Series Mixed Domain Oscilloscopes

- 100, 200, 350, 500 MHz, and 1 GHz models
- 2 or 4 analog channels
- 16 digital channels (optional)
- 10 Mpoint record length
- Integrated arbitrary/function generator (optional)
- Serial bus decoding and triggering options

Probes and Accessories

Tektronix probes and accessories are perfectly matched to our industry-leading oscilloscopes. With over 100 choices available, you will find the probe you need.

Low Voltage Differential Probes

- Bandwidth up to 33 GHz Easily measure differential signals
- Low input capacitance: down to < 0.3 pF
- High common mode rejection ratio (CMRR)
- Wide range of probe tips for easier circuit access

www.tek.com/differential-probe-low-voltage

High Voltage Differential Probes

- Dynamic range to ± 6000 V
- Bandwidth up to 200 MHz
- Most extensive set of probe accessories

www.tek.com/differential-probe-high-voltage

Current Probes

- Easy to use and accurate AC/DC current measurements
- DC up to 2 GHz
- Amplitude measurements from 1 mA to 2,000 A
- Split core and solid core construction

www.tek.com/current-probe

Passive Probes

- Best-in-class bandwidth up to 1 GHz
- Best-in-class input capacitance as low as 3.9 pF which minimizes probe loading effects
- Dynamic range to 300 V CAT II
- Rugged and reliable

www.tek.com/passive-probe

Low Voltage Single-ended Probes

- Bandwidth up to 4 GHz
- True signal reproduction and fidelity
- Low input capacitance: down to < 0.8 pF
- Small compact probe heads for probing small geometry circuit elements

www.tek.com/low-voltage-probe-single-ended

High Voltage Single-ended Probes

- Bandwidth up to 800 MHz
- Dynamic range to 2500 V
- Best-in-class probe loading with input capacitance as low as 1.8 pF

www.tek.com/high-voltage-probe-single-ended

Optical

- Broad Wavelength Response 500 to 950 nm or 1100 to 1700 nm
- High-bandwidth DC up to 1.2 GHz
- High Gain 1 V/mW
- Low Noise <11 pW/√Hz

www.tek.com/optical-probe

Carrying Cases and Accessories

- TekVPI Interface Adapter for TekProbe probes
- Probe holders and positioners
- Probe power supply
- Soft- and hard-sided cases

www.tektronix.com/probeaccessories

Interactive Probe Selector Tool

Need help finding the right probe for your application? The online Tektronix Probe Selector Tool will guide you through a few easy questions to match your need to the right probe. Visit us anytime, anywhere at: **www.tektronix.com/probes**

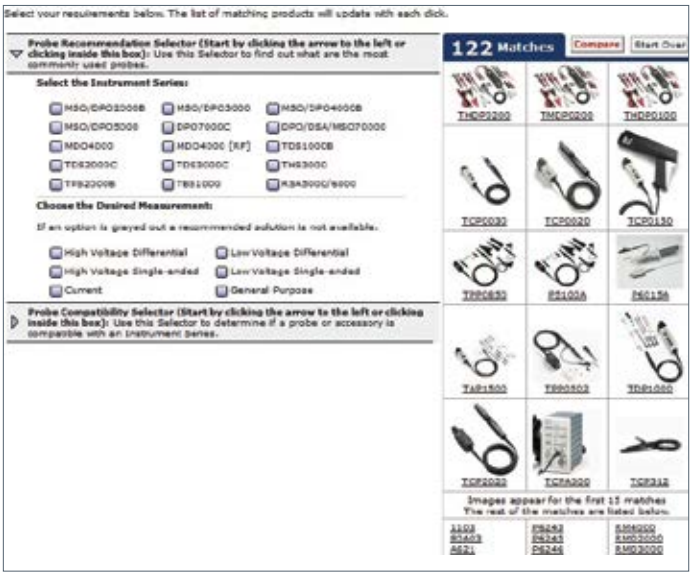
Select your requirements below. The list of matching products will update with each click.
Probe Recommendation Selector (Start by clicking the arrow to the left or clicking inside this box): Use this Selector to find out what are the most commonly used probes.
Select the Instrument Series:
Choose the Desired Measurement:
High Voltage Differential
Low Voltage Differential
High Voltage Single-ended
Low Voltage Single-ended
Current
General Purpose
Probe Compatibility Selector (Start by clicking the arrow to the left or clicking inside this box): Use this Selector to determine if a probe or accessory is compatible with an instrument series.
122 Matches
Compare
Start Over
Images appear for the first 15 matches
The rest of the matches are listed below.

Signal Generators

The definition of versatility, Tektronix signal generators create a virtually unlimited range of standard and custom signals, from sine or pulse to ideal or distorted and anything in between.

	TSG4100A Series	AFG3000C Series	AFG2000	AFG1000
Bandwidth	Internal 6 MHz, External 200 MHz	240 MHz, 100 MHz, 50MHz, 25 MHz, 10 MHz	20 MHz	25 MHz
Channels	1 LF and 1 RF	1 or 2 (independent or synchronized)	1	2
Memory Depth	16M bits	4 x 128 k points	4 x 128 k points	8 k
Standard Waveforms	CW	Sine, Sine(x)/x, Square, DC, Ramp, Gaussian, Exponential Decay, Pulse, Lorentz, Noise, Arbitrary, Haversine, Exponential Rise	Sine, Sine(x)/x, Square, DC, Ramp, Gaussian, Exponential Decay, Pulse, Lorentz, Noise, Arbitrary, Haversine, Exponential Rise	Sine, Square, Pulse, Ramp, Noise, and 45 Frequently Used Arbitrary Waveforms
Modulation	AM/FM/PM/Pulse, ASK/FSK/PSK/QAM/CPM/VSB, GSM, GSM-EDGE, W-CDMA,APCO-25, DECT, NADC, PDC,TETRA, and Audio clip (Analog AM and FM)	AM, FM, PM, FSK, PWM, External	AM, FM, PM, FSK, PWM, External	AM, FM, PM, FSK, External
Additional Modes	External IQ Waveform Input, Custom IQ Waveform Generation, ARB Waveform Generation (Remote Mode), Additive White Gaussian noise	Sweep, Burst, Add Noise Impairment	Sweep, Burst, Add Noise Impairment	Sweep, Burst
Starting Price	$7,800	$1,700	$1,430	$715

Choosing Your Signal Generator

In electronic test and measurement, more often than not, a signal source is required to generate signals that are not available unless externally provided. Below is a list of common features that you may want to consider when choosing a signal generator for your application.

1 Sample (Clock) Rate

Sample rate, usually specified in terms of megasamples or gigasamples per second, denotes the maximum clock or sample rate at which the instrument can operate. The sample rate affects the frequency of the main output signal. In general, you should choose an instrument where the sampling frequency is twice that of the highest spectral frequency component of the generated signal to ensure accurate signal reproduction. The maximum sample rate also determines the smallest time increment that can be used to create waveforms. Typically this figure is simply the result of the calculation; T = 1/F, where T is the timing resolution in seconds and F is the sample rate.

2 Memory Depth (Record Length)

Memory depth, or record length, plays an important role in signal fidelity because it determines how many points of data can be stored to define a waveform. Deeper memory enables you to store more waveform detail and/or more cycles of the desired waveform.

3 Vertical (Amplitude) Resolution

Vertical resolution pertains to the binary word size, in bits, of the instrument's DAC, with more bits equating to higher resolution. The vertical resolution of the DAC defines the amplitude accuracy and distortion of the re-produced waveform. Although more is better, there is a general trade-off for most arbitrary waveform instruments; the higher the resolution, the lower the sample rate.

4 Features and Capabilities

Tektronix signal generators offer a range of features and output capabilities. When choosing your signal generator, you should also evaluate standard waveforms, modulation capabilities, output amplitude and waveform editing software to ensure that the instrument meets your needs.

DATA SHEET

AFG1000 Series

The AFG1000 Series Arbitrary/Function Generator offers the best price performance ratio in its class. It's tailored for educational users with 25 MHz bandwidth, 2 output channels, and 1 mVp-p to 10 Vp-p output amplitude across full bandwidth. It generates all kinds of waveforms needed in a lab.

Product Highlights

- Full functional AFG with multiple run modes and a built-in 200 MHz frequency counter
- 1 mVpp to 10 Vpp output amplitude across full frequency range
- Intuitive UI with 3.95" color display provides quick access to functions and parameters, and gives full confidence on settings
- Fully supports TekSmartLab™



A full functional AFG with modulation, sweep and burst modes.

AFG1022 fully supported by TekSmartLab™.

Model	Analog Channels	Output Bandwidth	Analog Sample Rate	Memory Depth	Amplitude (into 50 ohm)	Built-in Frequency Counter	Pricing (USD)
AFG1022	2	25 MHz	125 MS/s	8 k	1 mV_{p-p} to 10V_{p-p}	200 MHz, 6 digits	$715

Recommended Accessories

174-4401-00	USB type A to type B cable – three feet	$10
174-5194-00	USB type A to type B cable – six feet	$26
012-1732-00	BNC to BNC CABLE - three feet	$27
159-0107-00	Fuse, cartridge; 5 x 20 mm, 2 A, 250 V, time-delay	$10
159-0397-00	Fuse, cartridge; 5 x 20 mm, 4 A, 250 V, time-delay	$10

Ships with Product

- Power Cord
- USB Cable
- CD-ROM with Programmer Manual, Service Manual,
- BNC to BNC cables
- Fuses
- Calibration Certificate

DATA SHEET

VIRTUAL TOUR

360° VIEW

AFG2000

Usually, generating a range of signals requires investing in a high-end signal generator. But with the Tektronix AFG2000 Arbitrary Function Generator, that's no longer the case. With 20 MHz bandwidth, 14-bit resolution, and 250 MS/s sample rate, it can create simple and complex signals. But perhaps its most impressive feature is its entry-level price.

Product Highlights

- High sample rate and stable time base ensure signal precision and stability
- Intuitive UI and 3.5" color display provide quick access to functions and parameters, and give full confidence on settings
- Form factor is ideal for both bench top and rack mount applications
- Free ArbExpress software enables an easy way to create, edit and load arbitrary waveforms



Wide frequency range (1 µHz to 20 MHz) supports amplifier and filter testing applications.

Quickly modify, create and transfer waveforms using the included ArbExpress® software.

Models	Analog Channels	Output Bandwidth	Analog Sample Rate	Memory Depth	Amplitude (into 50 Ω)	Pricing (USD)
AFG2021	1	20 MHz	250 MS/s	4 x 128 k	10 mV_{p-p} to 10 V_{p-p}	$1,430

Recommended Accessories

Cables		
012-0482-00	BNC cable shielded, 3 ft.	$238
012-1256-00	BNC cable shielded, 9 ft.	$97
012-0991-00	GPIB cable, double shielded	$563
011-0049-02	50Ω BNC Terminator	$156
Accessories		
RMU2U	Rackmount kit	$155
013-0345-00	Fuse adapter, BNC-P to BNC-R	$359
159-0454-00	Fuse set, 3pcs, 0.125 A	$25

Instrument Options

Opt. GL	GPIB/LAN Interface (configured at time of purchase)	$100

Recommended Service

SILV200	5-year Extended Warranty	$283

Ships with Product

- User Manual
- Power Cord
- USB Cable
- BNC to BNC cable
- CD-ROM with Programmer Manual, Service Manual, LabVIEW and IVI Drivers
- CD-ROM with ArbExpress® Software
- NIST-traceable Calibration Certificate

Learn more about the time-saving features of ArbExpress with the "Replicating Real World Signals with an Arbitrary/ Function Generator" application note.

DATA SHEET

VIRTUAL TOUR

360° VIEW

AFG3000C Series

Test complex designs faster with a fully loaded function generator. Featuring 12 standard waveforms, plus arbitrary capability and many modulation options, this generator supports a wide range of application needs. Add in best-in-class performance and 25 shortcut keys and you have a generator that's loaded with features and light on complexity.

Product Highlights

- High sample rate and stable time base ensure signal precision and stability
- 25 short-cut buttons and 5.6" color display provide quick access to functions and parameters, and give full confidence on settings
- 9 models with up to 240MHz bandwidth and up to 20Vp-p output amplitude cover customer needs in most applications
- Free ArbExpress software enables an easy way to create, edit and load arbitrary waveforms



Large color display shows your settings and waveforms at a single glance.



Create and modify waveforms with ease with the included ArbExpress® software.

Models	Analog Channels	Output Bandwidth	Analog Sample Rate	Memory Depth	Amplitude (into 50 Ω)	Pricing (USD)
AFG3011C	1	10 MHz	250 MS/s	4 x 128 k	20 mV_{p-p} to 20 V_{p-p}	$4,220
AFG3021C	1	25 MHz	250 MS/s	4 x 128 k	10 mV_{p-p} to 10 V_{p-p}	$1,700
AFG3022C	2	25 MHz	250 MS/s	4 x 128 k	10 mV_{p-p} to 10 V_{p-p}	$2,510
AFG3051C	1	50 MHz	1 GS/s (<=16k), 250 MS/s (>16k)	4 x 128 k	10 mV_{p-p} to 10 V_{p-p}	$2,590
AFG3052C	2	50 MHz	1 GS/s (<=16k), 250 MS/s (>16k)	4 x 128 k	10 mV_{p-p} to 10 V_{p-p}	$3,830
AFG3101C	1	100 MHz	1 GS/s (≤16k), 250 MS/s (>16k)	4 x 128 k	20 mV_{p-p} to 10 V_{p-p}	$3,990
AFG3102C	2	100 MHz	1 GS/s (≤16k), 250 MS/s (>16k)	4 x 128 k	20 mV_{p-p} to 10 V_{p-p}	$5,720
AFG3251C	1	240 MHz	2 GS/s (≤16k), 250 MS/s (>16k)	4 x 128 k	50 mV_{p-p} to 5 V_{p-p}	$8,230
AFG3252C	2	240 MHz	2 GS/s (≤16k), 250 MS/s (>16k)	4 x 128 k	50 mV_{p-p} to 5 V_{p-p}	$11,300

Recommended Accessories

Cables		
012-0482-00	BNC cable shielded, 3 ft.	$238
012-1256-00	BNC cable shielded, 9 ft.	$97
012-0991-00	GPIB cable, double shielded	$448
Accessories		
RM3100	Rackmount kit	$450
013-0345-00	Fuse adapter, BNC-P to BNC-R	$359
159-0454-00	Fuse set, 3pcs, 0.125A	$25

Recommended Service

SILV400	5-year Extended Warranty	$453

Ships with Product

- Quick Start User Manual
- Power Cord
- USB cable
- BNC to BNC cable
- CD-ROM with Specifications and Performance Verification Manual, Programmer Manual, Service Manual, LabVIEW and IVI Drivers
- CD-ROM with ArbExpress™ Software
- NIST-traceable Calibration Certificate

Learn more about the time-saving features of ArbExpress with the "Replicating Real World Signals with an Arbitrary/ Function Generator" application note.

DATA SHEET

TSG4100A Series

The TSG4100A Series RF Vector Signal Generator offers mid-range performance at an entry-level RF signal generator price, generating both analog and vector/digital signals for most popular applications. It's only 5.6 kg, half a rack wide, and 2U high with LAN/RS-232/USB/GPIB interfaces. A 4.3-inch LCD screen displays the parameters clearly, so you'll understand your results intuitively.

Product Highlights

- True DC to 2/4/6 GHz
- ≤±0.30 dB (typ) amplitude accuracy from 10 MHz to 6 GHz
- Phase Noise: -113 dBc/Hz @ 20kHz offset from 0 dBm, 1 GHz CW carrier
- Soft key upgrade to vector/digital modulation at very low cost, supporting 10 widely used formats
- USB, GPIB, RS-232, and LAN interfaces
- I/Q modulation inputs (max 400 MHz RF bandwidth)

A versatile RF solution for the generation, receiving and analysis of both analog and vector signals at budget point.

Good performance and flexible configurations for debug and troubleshooting.

Model	Description	Phase Noise (20kHz offset from 0 dBm, 1 GHz CW carrier)	Amplitude Range	Modulation formats	Pricing (USD)
TSG4102A	0 to 2 GHz RF SG, basic model	-113 dBc/Hz	+16.5 to -110 dBm	AM/FM/PM/Pulse; ASK/FSK/PSK/QAM/CPM/MSK/VSB; GSM/EDGE/TETRA/NADC/W-CDMA/P-25/DECT, etc.	From $7,800
TSG4104A	0 to 4 GHz RF SG, basic model	-113 dBc/Hz	+16.5 to -110 dBm		From $9,820
TSG4106A	0 to 6 GHz RF SG, basic model	-113 dBc/Hz	+16.5 to -110 dBm (< 4 GHz) +10 to -110 dBm (> 4 GHz)	All the vector/digital modulation formats upgrade by soft keys	From $13,200

Recommended Accessories

TSG4100A-ATT	30 dB, 5 W RF attenuator up to 6 GHz	$280
Option VM00	Basic vector modulation package with internal 6 MHz modulation bandwidth	$3,700
Option EIQ	External 200 MHz modulation bandwidth (requires Option VM00)	$1,600

Ships with Product

- RF Cable
- Documentation CD
- Installation and Safety Instructions
- Calibration Certificate
- Power Cord

Learn more with the "Versatile Vector & Digital Modulation Solution" application note.

Learn more with the "High Accurate Low Amplitude RF Signal Generation in Receiver Sensitivity Test" application note.

Education Solution – TekSmartLab™

TekSmartLab is the industry's first network-based instrument management solution for teaching labs that brings a more efficient lab experience.

Instruments Supported

- **Oscilloscope**
  Tektronix TDS1000B, TDS1000C-SC, TDS1000C-EDU, TBS1000, TBS1000B(-EDU), TDS2000C, DPO/MSO2000 (B), MDO3000
- **Arbitrary Function Generators**
  Tektronix AFG1022, AFG2021, AFG3000(C)
- **Digital Multimeters**
  Keithley DMM2110, DMM2100
- **Power Supplies**
  Keithley 2230G(J)-30-1, 2220G(J)-30-1, 2220(J)-30-1, 2230(J)-30-1, 2231A-30-3 (requires Option 2231A-001)

TekSmartLab network diagram

Centralize configuration

Centralize Monitoring and remote assistance

Test Results online retrieving and saving

Automatic Instrument Asset Information Recording

Sample TekSmartLab Configuration

The following shows a sample setup of a TekSmartLab system with 20 benches and 80 instruments connected through Wi-Fi.

Item	Qty	Supplier	Comments
TSL3000B	1	Tektronix	One per lab
TBX3000A	20	Tektronix	One per bench
Instruments	80	Tektronix	Supported instruments. 1 one oscilloscope, one arbitrary function generator, one digital multimeter, and one power supply per bench. Option 2231A-001 required for the power supply 2231A-30-3.
USB WIFI dongle	20	Provided by customer	Compatible USB-WIFI dongle
Router	1	Provided by customer	WIFI Router that can meet WI-FI networking requirements.
Lab server	1	Provided by customer	

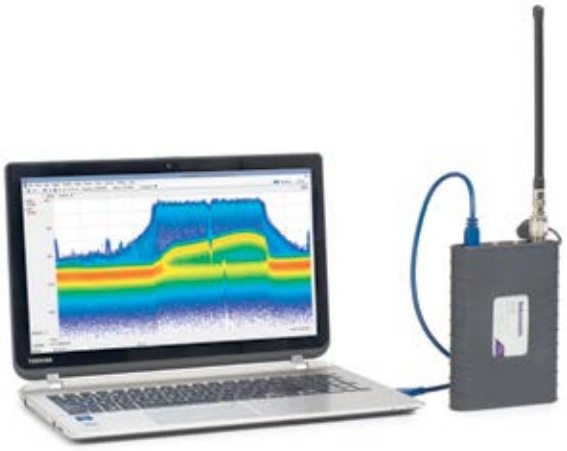

DATA SHEET

RSA306 USB Spectrum Analyzer

RF signal analysis in your hands!

The RSA306 offers full-featured spectrum analysis and deep signal analysis at a price unmatched by any previous offering. Using the latest in commercial interfaces and available computing power, the RSA306 separates signal acquisition from measurement, dramatically lowering the cost of instrument hardware. Data analysis, storage and replay is performed on your personal computer, tablet or laptop. Managing the PC separately from the acquisition hardware makes processing upgrades easy, and minimizes IT management issues.

SignalVu-PC software and an API for deep analysis and fast programmatic interaction.

The RSA306 operates with SignalVu-PC, a powerful program that is the basis of Tektronix performance signal analyzers. SignalVu-PC offers a deep analysis capability previously unavailable in value-priced solutions and a choice of options to further analyze the signal, for example WLAN or Bluetooth signals, or for general purpose digital modulation analysis. Real-time processing of the DPX spectrum/spectrogram is enabled in your PC, further reducing the cost of hardware. Customers who need programmatic access to the instrument can choose either the SignalVu-PC programmatic interface or use the included application programming interface (API) that provides a rich set of commands and measurements. A MATLAB driver for the API is available, enabling operation with MATLAB and the Instrument Control Toolbox.

Product Highlights

- Full-featured spectrum analysis capability with included Tektronix SignalVu-PC™ software
- 27 spectrum and signal analysis measurements standard
- Options for mapping, modulation analysis, WLAN and Bluetooth standards support, pulse measurements, and frequency settling
- Real-time Spectrum/Spectrogram display to minimize time spent on transient and interference hunting
- Application programming interface (API) included for Microsoft Windows environments
- MATLAB instrument driver for use with Instrument Control Toolbox
- Streaming capture records long-term event

Applications

R&D

Interference Hunting

Field installation and maintenance

Education

Ships with Product

- USB 3.0 cable (1 M)
- SignalVu-PC software, documentation, USB key
- Printed safety/installation manual
- One-year Warranty

RF Power Meters

Tektronix PSM Power Meter Series delivers the precision accuracy you need and the features you want, including exceptional temperature stability and throughput. Plus, with 13 models to choose from, it also delivers exceptional versatility.

	PSM3000	PSM4000	PSM5000
Description	Power Meter Average Power	Power Meter Average / Peak / Pulse	Power Meter Average / Peak / Pulse + Profiling
Frequency Range	10 MHz - 8 / 18 / 26.5 GHz	10 MHz - 8 / 18.6 / 20 GHz	50 MHz - 8 / 18.6 / 20 GHz
Dynamic Range	-55 to +20 dBm	-60 to +20 dBm	-60 to +20 dBm
Data Transfer Rate	2000 Reads/sec	2000 Reads/sec	2000 Reads/sec
Measurements	True Average Power; Duty Cycle Corrected Pulse Power; Measurement Logging	Average Power (CW); Duty Cycle Corrected Pulse Power; Peak Power, Duty Cycle; Peak and Average Burst Power; Measurement Logging	Average Power (CW); Duty Cycle Corrected Pulse Power; Peak Power, Pulse Power, Duty Cycle; Peak and Average Burst Power; Measurement Logging; Pulse Width, Rise/Fall, Overshoot, Droop, Time Gated Measurements, Pulse Waveform Display with Markers
Starting Price	$2,680	$2,890	$3,830

Choosing Your RF Power Meter

Power measurements are fundamental to the development cycle of any RF or microwave product, from radios to radars. To help you choose the right Power Sensor/Meter combination, the most common selection criteria are listed below, along with helpful tips for determining your requirements.

1 Measurement Integrity

Measurement integrity is a combination of the cumulative measurement uncertainty and instrument stability. While the measurement uncertainty is usually specified, the instrument stability includes several factors. By providing calibration over the entire temperature operating ranges and not requiring zeroing prior to measurement, the improved stability of the power sensor/meter reduces possible human errors and assures the integrity of measured results.

2 Performance and Functionality

Basic power measurements of continuous wave (CW) signals are fundamental to power sensor/meters. However, today's modern signals include modulation, pulses, or other time-varying attributes. Being able to correct for duty cycle, measure peak power, signal statistics, and trigger inputs and outputs increases the utility of the power sensor/meter combination.

3 Speed and Connectivity

Power measurements tend to dominate the test process of wireless device test. The speed of measurement should remain constant over the entire dynamic range of the sensor. USB connectivity and power enable high speed measurement throughput and help reduce system rack space.

4 Analysis

When integrating power measurements into a full system measurement process, you should review the available analysis software and hardware capabilities to determine if equipment redundancies can be eliminated. Advanced measurement analysis, like trend graphing, statistical measurements, measurement logging, and pulse profiling can replace more complex and expensive equipment needs and simplify device test.

DATA SHEET

VIRTUAL TOUR

360° VIEW

Product Highlights

- 8 GHz, 18 GHz, 20 GHz, and 26.5 GHz models
- Models available with N and 3.5 mm connectors
- Dynamic range as low as –60 dBm and as high as +20 dBm
- Uncertainty as low as 2.6%
- Reading rates up to 2000 readings/sec

PSM3000, 4000 and 5000 Series

The PSM3000, PSM4000, and PSM5000 Series are compact power sensors/meters that deliver fast, accurate RF and microwave power measurements. A broad range of CW and pulse modulation measurements are available, depending on the series you choose.

Models	Description	Frequency Range	Dynamic Range	Connector Style	Pricing (USD)
PSM3110	True RMS Average	10 MHz - 8 GHz	-55 to +20 dBm	3.5mm male	$2,680
PSM3120	True RMS Average	10 MHz - 8 GHz	-55 to +20 dBm	N-Male	$2,680
PSM3310	True RMS Average	10 MHz - 18 GHz	-55 to +20 dBm	3.5mm male	$3,570
PSM3320	True RMS Average	10 MHz - 18 GHz	-55 to +20 dBm	N-Male	$3,570
PSM3510	True RMS Average	10 MHz - 26.5 GHz	-55 to +20 dBm	3.5mm male	$4,550
PSM4110	Power Meter (Avg / Peak / Pulse)	10 MHz - 8 GHz	-60 to +20 dBm	3.5mm male	$2,890
PSM4120	Power Meter (Avg / Peak / Pulse)	10 MHz - 8 GHz	-60 to +20 dBm	N-Male	$2,890
PSM4320	Power Meter (Avg / Peak / Pulse)	50 MHz - 18.6 GHz	-40 to +20 dBm	N-Male	$5,480
PSM4410	Power Meter (Avg / Peak / Pulse)	50 MHz - 20 GHz	-40 to +20 dBm	3.5mm male	$5,480
PSM5110	Power Meter (Avg / Peak / Pulse + Profiling)	100 MHz - 8 GHz	-60 to +20 dBm	3.5mm male	$3,830
PSM5120	Power Meter (Avg / Peak / Pulse + Profiling)	100 MHz - 8 GHz	-60 to +20 dBm	N-Male	$3,830
PSM5320	Power Meter (Avg / Peak / Pulse + Profiling)	50 MHz - 18.6 GHz	-40 to +20 dBm	N-Male	$6,510
PSM5410	Power Meter (Avg / Peak / Pulse + Profiling)	50 MHz - 20 GHz	-40 to +20 dBm	3.5mm male	$6,510

Recommended Accessories

174-6150-xx	USB Cable, 2 m, 20 AWG	$49
174-6164-xx	SMB Female to BNC Male, 1 m Trigger Cable	$76
348-2013-xx	Replacement Rubber Boot	$25

Recommended Service

SILV200	5-year Extended Warranty (PSM3110, PSM3120)	$283
SILV400	5-year Extended Warranty (PSM3310, PSM3320)	$453
SILV600	5-year Extended Warranty (PSM3510)	$675

Ships with Product

- 2-meter USB Cable
- Calibration Certificate, USB flash drive with User and Safety Manual, Technical Reference Manual and the Programmer Manual
- 3-year Warranty

SourceMeter® SMU Instruments

Keithley Instruments SourceMeter® SMU instruments source current or voltage and simultaneously measure current, voltage and resistance with high speed and accuracy. SourceMeter® SMU instruments offer a smart alternative to separate power supplies and DMMs, saving money and limited test bench space.

	Model 2450/2460 Touchscreen SourceMeter® Instruments	Series 2400 Bench SourceMeter® SMU Instruments	Series 2600B System SourceMeter® SMU Instruments	2650A High Power System SourceMeter® SMU Instruments
Channels	1	1	1-2 (optional expansion to 64 via TSP-Link®)	1 (optional expansion to 32 via TSP-Link®)
Accuracy	6½-digit measurements	6½-digit measurements	6½-digit measurements	6½-digit measurements
Max. Readings / Second	3,000	2,000	20,000	38,500 1µSec/pt., 18-bit digitizer
Interface	GPIB, USB 2.0, LXI/Ethernet, Digital I/O	GPIB, RS-232, Digital I/O	GPIB, LAN (LXI), USB, RS-232, Digital I/O	GPIB, LAN (LXI), RS-232, Digital I/O
Application Features	Capabilities of analyzers, curve tracers, and I-V systems at a fraction of their cost; touchscreen and icon menu system; built-in graphing	Convenient DMM-like user interface; 2/4/6 wire resistance with force I or V source modes, V-Force from 1ΩV to 1.1KV, 10pA to 5A cont., 10A pulsed, 2W to 110W	True multi-channel parallel test via TSP-Link. Up to 0.1 fA resolution.	2 pairs of A/D converters for simultaneous V and I measurement; up to 2000W pulsed power
Test Sequencing / Scripting	TSP® (Test Script Processing) technology embeds complete test programs inside the instrument for unmatched system-level speed	Built-In ramp generator and list sweep modes, 100 point global machine state sequencer for fast test setup and execution	TSP® (Test Script Processing) technology embeds complete test programs inside the instrument for unmatched system-level speed	TSP® (Test Script Processing) technology embeds complete test programs inside the instrument for unmatched system-level speed
Software	Test Script Builder and KickStart Startup Software, LabVIEW and IVI Drivers.	LabTracer 2.0 I-V curve utility and IVI and LabVIEW drivers included.	Built-in, web browser-based characterization software, IVI, LabVIEW, and IC-CAP drivers.	Built-in, web browser-based characterization software, IVI, LabVIEW, and IC-CAP drivers.
Starting Price	$5,400	$4,720	$6,650	$16,200

Choosing Your Source Measure Unit (SMU) Instrument

A SMU instrument integrates precision power supply and digital multimeter (DMM) capabilities in one instrument while covering a wide dynamic range. SMUs source and measure simultaneously, making them ideal for characterizing and testing semiconductors and other non-linear devices and materials.

1 System-Level Speed or Throughput

The true measure of speed is how quickly a final measurement or set of measurements (such as a suite of current vs. voltage parameters) is returned to the PC controller. This involves not only the number of readings/second, but also range and function change times.

2 Sourcing Resolution and Output Stability

An SMU's usable maximum resolution depends on its overall accuracy and the resolution of its analog-to-digital converter (ADC). In general, the higher the resolution is, the higher the bit count on the ADC and the higher the accuracy will be.

3 Measurement Settling Time, Offset Error, and Noise

When choosing between instruments, compare the time it takes a SMU to settle the specified offset error. This can be seen in the "bumpiness" of the resulting data curve, which indicates measurement noise; the smoother the data curve the less measurement noise. SMUs having a fast, flat, and noise-free settling time achieve more consistent results during a series of measurements taken over time.

4 Cabling

Triaxial cables offer significant advantages over coaxial cables when making low current measurements. Triaxial cables have an extra shield that ensures lower leakage, better response, and greater noise immunity.

DATA SHEET

Model 2450/2460 Advanced Touchscreen SourceMeter® SMU Instruments

Touch, Test, Invent® with the intuitively smart, interactive SMU Instruments. The Models 2450 and 2460 SMU Instruments are innovative, compact I-V solutions that offer the capabilities of I-V systems, curve tracers, and semiconductor analyzers at a fraction of their cost. With the intuitive touchscreen and icon-based control that novice SMU users can appreciate and the exceptional versatility that experienced users need, the Models 2450 and 2460 enable users to learn faster, work smarter, and invent easier. Their user experience, performance, and application versatility, combined with proven Keithley precision and accuracy, will make the 2450 and 2460 the favorite go-to instruments in the lab for years to come.

A Smart Toolkit Beyond the Touchscreen

Speed, ease of use, and learnability don't stop with the 2450 and 2460 advanced touchscreen. Each instrument's front panel features a context-sensitive HELP system, rotary navigation/control knob, front/rear input selector button, and banana jacks for basic bench applications. A USB 2.0 memory I/O port makes it easy to store data, save instrumentation configurations, load test scripts, and upgrade the system.

Product Highlights

- Highly flexible, source and sink (four-quadrant) operation simultaneously measures voltage, current, and resistance in a single, integrated I-V instrument
- Advanced, five-inch touchscreen user interface with multi-point, pan-pinch-zoom-swipe operation minimizes the learning curve and improves productivity
- Graphical interface provides I-V curve tracing functionality for much less than the cost of traditional curve tracers
- Lower current and voltage measurements ranges (100nA, 10nA, 20mV) reduce need for additional expensive low level instruments (Model 2450)
- High current and high power ranges (7A, 100W) for characterizing and testing high power materials and devices (Model 2460)
- Front panel banana jack inputs and rear panel connections (triaxial connectors on 2450, mass terminated screw terminal on 2460) optimize signal integrity and convenience and save money on adapter accessories
- PC-based instrument and control software enable instrument control without programming hassles
- Four programming modes provide unmatched programming flexibility and system integration

Home page advanced source and measure display enables faster speed to answer.

Icon-based, flat menu system can reduce configuration steps by 50% and eliminates cumbersome, multi-layer menu structures.

The Models 2450 and 2460 are ideal for I-V functional test and characterization of a wide range of today's modern devices, including:

- Low and High Power Semiconductors
- LEDs, High Brightness LEDs
- Solar Cells, Solar Panels
- Nanomaterials and Devices
- Graphene
- Printed/Flexible Electronics
- Batteries/Electrochemistry
- Sensors
- Biotechnology

DATA SHEET

Model 2450/2460 Advanced Touchscreen SourceMeter® SMU Instruments

Trusted Precision, Accuracy, and Performance

The 2450 and 2460 are based on the trusted analog performance of Keithley's Model 2400 SourceMeter SMU Instruments and offer a highly flexible, four-quadrant voltage and current source/load coupled with precision voltage and current meters. These fourth-generation members of Keithley's award-winning SMU family provide the superior precision, resolution, accuracy, and dependability that users have come to expect from Keithley SMU instruments.



With significantly lower wideband noise than its closest competitor, the 2450 is the perfect solution for I-V testing of next-generation devices.

Ships with Product

- 8608 High Performance Test Leads
- 2460-KIT Rear Panel Mating Mass Terminated Screw Connector (Model 2460 ONLY)
- USB-B-1 USB Cable, Type A to Type B, 1m (3.3 ft)
- CS-1616-3 Safety Interlock Mating Connector
- CA-180-3A TSP-Link®/Ethernet Cable
- Documentation CD
- QuickStart Guide
- Test Script Builder Software (available at www.keithley.com)
- KickStart Startup Software (available at www.keithley.com)
- LabVIEW® and IVI Drivers (available at www.keithley.com)

Model	Current Max / Min	Voltage Max / Min	Power	Pricing (USD)
2450	1.000000A / 10.00000nA	200.0000V / 20.00000mV	20W	$5,400
2450-NFP (with No Front Panel)				$5,100
2450-RACK (without Handle)				$5,400
2450-NFP (with No Front Panel or Handle)				$5,100
2460	7.000000A / 1.000000µA	100.0000V / 200.0000mV	100W	$7,500
2460-NFP (with No Front Panel)				$7,200
2460-RACK (without Handle)				$7,500
2460-NFP (with No Front Panel or Handle)				$7,200

Recommended Service

2450		
2450-3Y-EW	1-year factory warranty extended to 3 years from date of shipment	$332
2450-5Y-EW	1-year factory warranty extended to 5 years from date of shipment	$591
C/2450-3Y-17025	KeithleyCare® 3-year ISO 17025 Calibration Plan	$1,010
C/2450-3Y-DATA	KeithleyCare® 3-year Calibration w/Data Plan	$692
C/2450-3Y-STD	KeithleyCare® 3-year Std. Calibration Plan	$540
C/2450-5Y-17025	KeithleyCare® 5-year ISO 17025 Calibration Plan	$1,580
C/2450-5Y-DATA	KeithleyCare® 5-year Calibration w/Data Plan	$1,010
C/2450-5Y-STD	KeithleyCare® 5-year Std. Calibration Plan	$942

Recommended Service

2460		
2460-3Y-EW	1-year factory warranty extended to 3 years from date of shipment	$432
2460-5Y-EW	1-year factory warranty extended to 5 years from date of shipment	$768
C/2460-3Y-17025	KeithleyCare® 3-year ISO 17025 Calibration Plan	$1,330
C/2460-3Y-DATA	KeithleyCare® 3-year Calibration w/Data Plan	$912
C/2460-3Y-STD	KeithleyCare® 3-year Std. Calibration Plan	$712
C/2460-5Y-17025	KeithleyCare® 5-year ISO 17025 Calibration Plan	$2,080
C/2460-5Y-DATA	KeithleyCare® 5-year Calibration w/Data Plan	$1,330
C/2460-5Y-STD	KeithleyCare® 5-year Std. Calibration Plan	$1,220

DATA SHEET

Series 2400 SourceMeter® SMU Instruments

Series 2400 SourceMeter® SMU instruments are single-channel models with I-V capability from 1100V to 100nV and 10.5A pulse to 1pA. They offer a smart alternative to separate power supplies and digital multimeters (DMMs) and provide a convenient DMM-like user interface.

Product Highlights

- Wide I-V range from 1100V to 100nV and 10.5A pulse to 1pA
- 4-quadrant design simultaneously measures voltage, current, and resistance
- Remote sense on V-source and measure plus guarded ohms mode
- Built-In test sequencer
- Includes LabTracer 2.0 I-V curve utility and IVI and LabVIEW drivers
- Standard GPIB and RS-232 interfaces; Banana (front / rear) Connectors



Model 2400 four-quadrant operation characteristics, a feature of all SourceMeter SMU instruments.



Free LabTracer2 software for remote control and data sharing for applications ranging from the simple to complex.

Model	Current Max / Min	Voltage Max / Min	Power	Pricing (USD)
2400 / 2401	1.05A /10pA	200V/1µV (20V 2401)	20W	$4,720 / $3,470
2410	1.05A /10pA	1100V/1µV	20W	$6,750
2440	5.25A /100pA	40V/1µV	50W	$7,690
2420 / 2425	3.15A /100pA	Up to 100V/1µV	60W/100W	$6,760 / $8,050
2430	10.5A pulse /100pA	100V/1µV	1000W	$11,800

Recommended Service

C/2400-3Y-17025	(ISO-17025 accredited) calibrations within 3 years of purchase for Models 2400*	$1,070
C/2401-3Y-17025	(ISO-17025 accredited) calibrations within 3 years of purchase for Model 2401*	$1,070
C/2410-3Y-17025	(ISO-17025 accredited) calibrations within 3 years of purchase for Models 2410*	$1,290
C/2420-3Y-17025	(ISO-17025 accredited) calibrations within 3 years of purchase for Models 2420*	$1,290
C/2425-3Y-17025	(ISO-17025 accredited) calibrations within 3 years of purchase for Models 2425*	$1,390
C/2430-3Y-17025	(ISO-17025 accredited) calibrations within 3 years of purchase for Models 2430*	$1,530
C/2440-3Y-17025	(ISO-17025 accredited) calibrations within 3 years of purchase for Models 2440*	$1,390

*Not available in all countries.

Ships with Product

- Model 8605 Test Leads
- LabVIEW Software Driver (downloadable)
- LabTracer Software (downloadable)
- Calibration Certificate (Basic)
- Manual CD
- Power Cord
- Warranty

Read the white paper, "Choosing the Optimal Source Measurement Unit Instrument for Your Test and Measurement Application."

DATA SHEET

Series 2600B System SourceMeter® SMU Instruments

Series 2600B SourceMeter® SMU instruments are the industry's most powerful, fastest, and highest resolution SMU instruments. Now they're easier than ever to use with USB 2.0 connectivity, Model 2400 software emulation, and Java-based plug & play test software. Series 2600B models offer the industry's widest dynamic range: 10A pulse to 0.1fA and 200V to 100nV.

Product Highlights

- 4-quadrant design simultaneously sources and measures voltage, current, and resistance
- TSP® (embedded Test Script Processor) architecture enables industry-best system-level speed
- TSP-Link® for true SMU-per-pin and parallel test
- Built-in software for quick and easy I-V test through web browser
- GPIB, LAN (LXI), USB and RS-232

Built-in, Java-based test software runs directly from any web browser to boost productivity.

TSP technology executes complete test programs from the 2600B's non-volatile memory.

Model	Current Max / Min	Voltage Max / Min	Max Readings / Sec	No. of Channels	Pricing (USD)
2601B	3A DC, 10A pulse/100 fA	40V/100nV	20,000	1	$6,650
2602B	3A DC, 10A pulse/100 fA		20,000	2	$9,760
2604B	3A DC, 10A pulse/100 fA		20,000	2	$8,090
2611B	1.5A DC, 10A pulse/100 fA	200V/100nV	20,000	1	$6,650
2612B	1.5A DC, 10A pulse/100 fA		20,000	2	$9,760
2614B	1.5A DC, 10A pulse/100 fA		20,000	2	$8,090
2634B	1.5A DC, 10A pulse/1fA		20,000	2	$12,700
2635B	1.5A DC, 10A pulse/0.1 fA		20,000	1	$9,910
2636B	1.5A DC, 10A pulse/0.1 fA		20,000	2	$15,300

Recommended Accessories

2600-BAN	Banana Test Leads Adapter	$168
8606	Probe Kit for 2600-BAN	$62
2600-Std-Res	Calibration Standard 1G ohm Resistor	$2,100

Recommended Service

26XXB-3Y-EW_	3-Year KeithleyCare Gold Plan	Varies
26XXB-5Y-EW_	5-Year KeithleyCare Gold Plan	Varies
C/26xxB-3Y-XXXX	Calibration Service 3 Years (17025 or DATA or STD)	Varies
C/26xxB-5Y-XXXX	Calibration Service 5 Years (17025 or DATA or STD)	Varies

Ships with Product

- Operators and Programming Manuals
- 2600-ALG-2: Low Noise Triax Cable with Alligator Clips, 2m (6.6 ft.) (two supplied with 2634B and 2636B, one with 2635B)
- 2600-Kit: Mating Screw Terminal Connectors with strain relief and covers (2601B/2602B/2604B/2611B/2612B/2614B)
- CA-180-3A: TSP-Link/Ethernet Cable (two per unit)
- TSP Express Software Tool (embedded)
- Test Script Builder Software (downloadable)
- LabVIEW Driver (downloadable)
- ACS Basic Edition Software (optional)

DATA SHEET

2650A High Power System SourceMeter® SMU Instruments

The high current Model 2651A and high voltage Model 2657A High Power System SourceMeter SMU instruments address such applications as testing power semiconductor devices, including diodes, FETs, and IGBTs, as well as characterizing newer materials such as gallium nitride, silicon carbide, and other compound semiconductor materials or devices.

Product Highlights

- Source and measure up to 3kV or 50A pulse, with best-in-class low current resolution
- Up to 2000W pulse or 200W DC power per instrument
- Optimized for characterizing and testing high power semiconductors,electronics, and materials



TSP and TSP-Link technology enables SMU-per-pin parallel testing without the channel limits of a mainframe-based system.



The dual digitizing A/D converters sample at up to 1µs/point, enabling full simultaneous characterization of both current and voltage waveforms.

Model	Power Characteristics	4 Quadrant Source or Sink Capabilities	Resolution	Applications	Pricing (USD)
2651A	Up to 50A (or 100A with 2 units) and up to 2000W pulse / 200W DC power	Up to ±40V and ±50A	100fA/1µV resolution	High Current, High Power Device Testing	$16,200
2657A	Up to 3,000V and up to 180W of power	Up to 3000V @ 20mA or 1500V @ 120mA	1fA/100µV resolution	High Voltage, High Power, Low Current Device Testing	$20,200

Recommended Accessories

2600-KIT	Low Impedance Cable Assemble, 1m (3.3 ft)	$43
ACS-BA-SIC	Component Charaterization Software	$5,400
4299-6	Rack Mount Kit	$147
8011	Test Socket Kit	$1,170
8010	High Power Device Test Fixture (Model 2657A)	$7,550
8020	High Power Interface Panel	$5,000
2657A-LIM-3	Low Interconnect Module (Model 2657A)	$1,680
2657A-PM-200	200V Protection Module (Model 2657A)	$1,190
SHV-CA-553-2	High Voltage Triax to SHV Cable (1, 2, 3m) (Model 2657A)	$665
HV-CA-554-2	High Voltage Triax to Triax Cable (0.5, 1, 2, 3m) (Model 2657A)	$777
HV-CA-571-3	High Voltage Triax to Unterminated Cable (Model 2657A)	$556
HV-CS-1613	High Voltage Triax Feedthrough Connector (Model 2657A)	$777

Recommended Service

2651A-3Y-EW	3-Year KeithleyCare Gold Plan	$1,010
2657A-3Y-EW	3-Year KeithleyCare Gold Plan	$1,160
C/2651A-3Y-STD	KeithleyCare 3-Yr Std Cal Plan	$887
C/2657A-3Y-STD	KeithleyCare 3-Yr Std Cal Plan	$1,380
C/2651A-5Y-STD	KeithleyCare 5-Yr Std Cal Plan	$1,470
C/2657A-5Y-STD	KeithleyCare 5-Yr Std Cal Plan	$2,280

Ships with Product

- 7709-308A Digital I/O and Interlock Connector
- CA-180-3A TSP-Link/Ethernet Cable
- Documentation CD
- Software Tools and Drivers CD
- 2651A-KIT-1A: Low Impedance Cable Assembly (1m) (Model 2651)
- CS-1592-2: High Current Phoenix Connector (male) (Model 2651)
- CS-1626-2: High Current Phoenix Connector (female) (Model 2651)
- CA-557-1: Sense Line Cable Assembly (1m) (Model 2651)

Learn more with the "Creating Multi-SMU Systems with High Power System SourceMeter Instruments" application note.

Power Analyzers

Fully characterize your power-electronics design from input to output with Tektronix power analyzers. Designed for precision measurement of power-electronics circuits and devices, these analyzers give you what you need to measure conversion efficiency and perform compliance testing on single-phase or 3-phase devices.

	PA4000 Multi-Channel	PA1000 Single-Phase
Multi-Channel Power Analyzer	PA4000_1CH, PA4000_2CH, PA4000_3CH, PA4000_4CH	PA1000
Power Input Modules	1 – 4 (factory configured)	1
Basic Accuracy (V & I)	0.01% of reading + 0.04% of range (45-850 Hz)	0.05% of reading + 0.05% of range
Measurement Bandwidth	DC, 0.1 Hz - 1 MHz	DC, 0.1 Hz - 1 MHz
Voltage Range	2V peak to 2000V peak	10V peak to 1000V peak
Current Range (internal shunts)	0.00025 A to 30 A RMS	0.0002 A to 20A RMS
Starting Price	$10,700	$2,850

Choosing Your Power Analyzer

Power analyzers are used for testing a wide range of power-electronics devices, from cell-phone chargers to 1000kW grid-connected inverters. To help you choose the best analyzer for your application, consider the criteria below.

1 Number of Inputs

Power analyzers are available in both fixed configurations (typically single-channel) and modular configurations. If your application is limited to single-phase devices, a single-channel analyzer may meet your needs. But if you need to measure conversion efficiency on these devices, a two-channel analyzer is required.

Testing of 3-phase devices of course requires a multi-phase analyzer. In many cases, two channels will be all you need for a two-wattmeter measurement on 3-wire inputs or outputs. A four- channel analyzer can measure both input and output simultaneously, to determine conversion efficiency.

2 Measurement Bandwidth

How much bandwidth is enough? The measurement bandwidth you need is usually determined by the switching speed of the device-under-test, or the highest-order harmonic that you are testing requires. Switching speeds of tens or hundreds of kHz are common in today's designs. But new semiconductor technologies promise to increase speeds up to 2x or more in the near future. Choose an analyzer that is capable of measuring your highest frequencies of interest, with some headroom for future-proofing.

3 Compliance Testing for Regulatory Standards

If your application requires you to know that your device is compliant with regulatory standards such as IEC61000 for harmonics, or ENERGY STAR™ for energy efficiency, you need an analyzer capable of meeting the test requirements specified by the standard. Even better, look for an analyzer supported by software applications that can automate instrument setup and reporting of test results in the exact format required for your application.

4 Current Shunts: Internal or External?

Will you be measuring milliamperes or hundreds of amperes? Power analyzers vary in the features they offer for direct current inputs or connection to external current transducers. Ideally, the analyzer should have internal current shunts that allow you to connect your device directly, for best accuracy. If you will be testing a range of devices at different power levels, you may value both high- and low-range shunts. Finally, if your application requires external current transducers (usually required for current >30Amps), make sure there are transducers available that are well-matched to the analyzer and offer the accuracy you need.

5 Remote Communication

Will you have a need to control the analyzer remotely or transfer measurement data to your PC? If so, you will want to look for an instrument that features the communication ports you need. Depending on the analyzer model, some ports may be standard features or extra-cost options; be careful to choose the right instrument configuration that meets your requirements.

DATA SHEET

VIRTUAL TOUR

360° VIEW

PA1000 Power Analyzer

The Tektronix PA1000 is your best choice for making precision power measurements on single-phase power supplies and all types of products connected to the AC line. Whether you need to test for compliance with energy-usage regulations such as ENERGY STAR™, or simply need to characterize your product's overall power-conversion performance and efficiency, you will find the PA1000 offers the most modern and complete test solution with performance and features unmatched by other single-phase analyzers.

Product Highlights

- 0.05% basic reading accuracy
- Dual shunts maximize accuracy for low and high current measurements
- USB, Ethernet and GPIB interfaces.
- PWRVIEW PC software for measurement and control. Includes IEC62301 Ed.2 standby power.
- Harmonics, Inrush and Energy (W-h) measurements.

Color display for 4 or 14 measurements and waveform, harmonics and energy trend graphics.



PWRVIEW PC software for measurement and control. Includes IEC62301 Ed.2 standby power measurement reporting.

Model	Description	BasicAccuracy (V & I)	Voltage Input Range	Current Range (internal shunts)	Pricing (USD)
PA1000	PA1000 Single-Phase Power Analyzer	0.05% (45-850 Hz)	10V peak to 1000V peak	0.0002 A to 20A RMS	$2,850

Recommended Accessories

CL200	Current Clamp, 0.5A - 200A, for Tektronix Power Analyzers	$268
CL1200	Current Clamp, 0.1A - 1000A, for Tektronix Power Analyzers	$422
BAL-LAST-CT	Differential current transformer for lighting applications. 1A, 1MHz	$357
BB1000-XX	Breakout Box simplifies connections to AC power cords. NA, EU and UK versions.	$296
PA-LEADSET	Replacement Lead Set for Tektronix Power Analyzers (One Channel Lead Set)	$233

BB1000-NA Breakout Box

Recommended Service

C3	Calibration Service 3 Years	$471
C5	Calibration Service 5 Years	$910
D1	Calibration Data Report	$46
D3	Calibration Data Report 3 Years (with Opt. C3)	$92
D5	Calibration Data Report 5 Years (with Opt. C5)	$184

Ships with Product

- Lead Set
- User Manual
- AC Power Cord
- Certificate of Traceable Calibration
- 5-year Product Warranty

Available for Free Download

- PWRVIEW PC Software for remote instrument setup, data transfer and offline analysis
- Application notes, whitepapers and videos at: **www.tek.com/application/power-measurement**

Learn more with "Power Supply Measurement with the PA1000 Power Analyzer," **click here.**

DATA SHEET

VIRTUAL TOUR

360° VIEW

PA4000 Power Analyzers

Tektronix PA4000 Power Analyzers provide you with highly accurate power, energy and efficiency measurements. Precisely matched inputs and advanced signal processing deliver high measurement accuracy, even when power is distorted or noisy. The PA4000 performs all power measurements – and harmonics analysis, application-specific measurements, PC interfaces, and dual patent-pending Spiral Shunt™ current shunts per channel are all standard features. PWRVIEW for data transfer and PC analysis is available to download free from tektronix.com.

Product Highlights

- 1 to 4 input modules with precision phase-matched V & I inputs, 1000 Vrms, 30 Arms direct input
- Measurement BW: DC to 1 MHz
- 0.01% basic accuracy
- Application specific test modes for Motor Drives, Ballasts, Standby Power and Energy Integration
- Harmonics measurement to 100th harmonic
- Full-color TFT display with waveform graphics, vector, bar chart, trend

Each input module features both high- and low-range current shunts.

USB, Ethernet and RS-232 ports are standard.

Model	Description	BasicAccuracy (V & I)	Voltage Input Range	Current Range (internal shunts)	Pricing (USD)
PA4000 1CH	PA4000 Power Analyzer with 1 input module	0.01% (45-850 Hz)	2V peak to 2000V peak	0.00025 A to 30 Arms	$10,700
PA4000 2CH	PA4000 Power Analyzer with 2 input modules	0.01% (45-850 Hz)	2V peak to 2000V peak	0.00025 A to 30 Arms	$13,600
PA4000 3CH	PA4000 Power Analyzer with 3 input modules	0.01% (45-850 Hz)	2V peak to 2000V peak	0.00025 A to 30 Arms	$16,500
PA4000 4CH	PA4000 Power Analyzer with 4 input modules	0.01% (45-850 Hz)	2V peak to 2000V peak	0.00025 A to 30 Arms	$19,300

Recommended Accessories

CT-60-S	Fixed-Core Current Transducer, High Accuracy, up to 60A	$914
CT-200-S	Fixed-Core Current Transducer, High Accuracy, up to 200A	$914
CT-400-S	Fixed-Core Current Transducer, High Accuracy, up to 400A	$1,070
CT-1000-S	Fixed-Core Current Transducer, High Accuracy, up to 1000A (requires external power supply)	$2,090
CT-100-M	Fixed-Core Current Transducer, Hall Effect, up to 100A	$231
CT-200-M	Fixed-Core Current Transducer, Hall Effect, up to 200A	$252
CT-500-M	Fixed-Core Current Transducer, Hall Effect, up to 500A	$336
CT-1000-M	Fixed-Core Current Transducer, Hall Effect, up to 1000A	$410

Recommended Accessories

CL200	Current Clamp, 0.5A - 200A, for Tektronix Power Analyzers	$268
CL1200	Current Clamp, 0.1A - 1000A, for Tektronix Power Analyzers	$422
BAL-LAST-CT	Differential current transformer for lighting applications. 1A, 1MHz	$357
BB1000-XX	Breakout Box simplifies connections to AC power cords. NA, EU and UK versions.	$296
PA-LEADSET	Replacement Lead Set for Tektronix Power Analyzers (One Channel Lead Set)	$233

Recommended Service

C3	Calibration Service 3 Years	Varies
C5	Calibration Service 5 Years	Varies

Ships with Product

- Lead Set (1 set per input module)
- User Manual
- AC Power Cord
- Certificate of Traceable Calibration
- 5-year Product Warranty

Available for Free Download

- PWRVIEW PC Software for remote instrument setup, data transfer and offline analysis
- Application notes, whitepapers and videos at: **www.tek.com/application/power-measurement**

Learn more with "Power Analysis of PWM Motor Drives," **click here.**

Digital Multimeters

Designed to save time and reduce headaches, Tektronix and Keithley Digital Multimeters are built to do more so you don't have to. Each one is loaded with time-saving features like automated measurements, built-in analysis modes and front-panel shortcut buttons. Keithley's highly regarded high performance digital multimeters (DMMs) include 7½ or 8½-digit solutions as well as flexible broad-purpose DMMs.

	Keithley Model 2110	Tektronix Model DMM4020	Keithley Models 2000, 2100	Keithley Model DMM7510	Tektronix Models DMM4040/4050	Keithley Models 2001, 2010	Keithley Model 2002
Resolution	5½ digit	5½ digit	6½ digit	7 ½ digit	6½ digit	7½ digit	8½ digit
Basic Accuracy	0.012%	0.015%	0.0038% (Model 2100) 0.0030% (Model 2000)	0.0014%	0.0035% (DMM4040) 0.0024% (DMM4050)	0.0024%	0.0010%
Optional Switch Functions	Not Applicable	Not Applicable	10 Channel (Model 2000)	Future	Not Applicable	10 Channel	10 Channel
Interface	USB-TMC GPIB Option	RS-232, RS-232 to USB Device Adapter Included	GPIB, RS-232 (Model 2000) USB-TMC (Model 2100)	GPIB, USB Device-TMC, Ethernet-LXI, USB- Host	USB host, RS-232, GPIB, Ethernet, RS-232 to USB Device Adapter Included	GPIB, RS-232 (Model 2010) GPIB (Model 2001)	GPIB
Software	KI-Tool and KI-Link Startup Software, LabVIEW and IVI drivers. Available at www.keithley.com	--	KI-Tool and KI-Link Startup Software (Model 2100 only), LabVIEW and IVI drivers. Available at www.keithley.com	KickStart Startup Software, LabVIEW, IVI-COM/IVI-C, drivers, Keithley LXI Discovery Browser, Test Script Builder	--	LabVIEW Driver	LabVIEW Driver
Starting Price	$622	$849	$879	$3,990	$1,170	$3,050	$6,270

Choosing Your Digital Multimeter

To help you choose the right digital multimeter for your needs, the most common selection criteria are listed below, along with helpful tips for determining your requirements.

1 Resolution

Resolution refers to how fine a measurement a meter can make. By knowing the resolution of a meter, you can determine if it is possible to see a small change in your signal. The terms digits and counts are used to describe a meter's resolution. A 6.5-digit multimeter can display 6 full digits ranging from 0 to 9, and one "half" digit, which displays only a 1 or is left blank. A 6.5-digit meter will display up to 1,999,999 counts of resolution.

2 Accuracy

Accuracy is the largest allowable error that will occur under specific operating conditions. In other words, it is an indication of how close the DMM's displayed measurement is to the actual value of the signal being measured. Accuracy is usually expressed as a percent of reading. An accuracy of one percent of reading means that for a displayed reading of 100 volts, the actual value of the voltage could be anywhere between 99 volts and 101 volts.

3 Measurements

Digital multimeters are capable of making a variety of different measurements. A basic DMM typically can measure voltage, current and resistance. Other measurements commonly supported are continuity and diode measurements. Continuity is a quick go/no-go resistance test that distinguishes between an open and a closed circuit. A diode test mode measures the actual voltage drop across a junction. Other possible measurement modes are frequency, period, temperature and capacitance.

4 Extra Channel Capacity

Many of Keithley's DMMs include the capability to add a scanner accessory, enabling measurements on multiple test points or devices.

DATA SHEET

Models 2000, 2100, 2110

These cost effective, high precision instruments offer 5.5- and 6.5-digit accuracy and are ideal for a wide range of manual, semi-automatic, and production test applications. They can be used as stand-alone benchtop instruments and as components in test systems.

Product Highlights

- Exceptional 6½-digit measurement integrity with high speed throughput (Model 2000)
- Built-in slot for scanner card (Model 2000)
- 15 built-in measurement functions including thermocouples (Model 2110)
- Full featured DMMs at a value price
- USB Test and Measurement Class (USBTMC) interface (Models 2110 and 2100)



The KI-Tool application for the Model 2100 provides charting and graphing capabilities without programming.

For multipoint measurement, plug a scanner card into the Model 2000.

Model	Resolution	Basic V DC Accuracy, 1 Year (% Reading + % Range)	Measurements	Interface	Pricing (USD)
2000	6½	0.0030 + 0.0005	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, dB, dBm, Cont., Diode	GPIB, RS-232	$1,140
2100	6½	0.0038 + 0.0006	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, Cont., Diode	USB	$879
2110	5½	0.012 + 0.002	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, dB, dBm, Cont., Diode, Cap., Therm.	USB (GPIB Option)	$622

Recommended Accessories

2000-SCAN	10-channel Scanner Card (Model 2000)	$622
2001-SCAN	10-channel Scanner Card with Two High-speed channels (Model 2000)	$848
2001-TSCAN	9-channel Thermocouple Scanner Card (Model 2000)	$1,140
5808	Low cost, Single Pin, Kelvin Probes	$115
5805	Kelvin Probes, 0.9m (3ft)	$238
5805-12	Kelvin Probes, 3.6m (12ft)	$313
5809	Low Cost, Kelvin Clip Lead Set	$173

Recommended Accessories

7007-1	Shielded GPIB Cable, 1m (3.3ft)	$118
7007-2	Shielded GPIB Cable, 2m (6.6ft)	$131
KP-CI-488LPA	IEEE-488 Interface/ Controller for the PCI Bus	$475
KUSB-488B	IEEE-488 USB to GPIB Interface Adapter	$539
4288-1	Single Fixed Rack Mount Kit (Model 2000, 2100)	$95
4299-3	Single Rack Mount Kit (Model 2100 and 2110)	$108
4299-4	Dual Rack Mount Kit (Model 2100 and 2110)	$228

Ships with Product

- Safety Test Leads
- Product CD (Includes Users Manual, Drivers, Etc.)
- USB Cable (Models 2100/2110)
- KI Tool and KI Link Software (Models 2100/2110)
- Calibration Certificate
- Power Cord
- 1-year Warranty
- 3-year Warranty (Model 2110)

Learn more with the “Using the Dual Measurement Functionality and Dual Measurement Display on the Keithley Model 2110 5½-Digit Dual-Display Digital Multimeter” Application Note.

DATA SHEET

Models 2001, 2002, 2010

Each Model 2001, 2002, and 2010 digital multimeter (DMM) offers superior measurement precision, sensitivity, and traceability. They also support plug-in scanner cards that allow you to quickly and economically create multi-channel measurement systems.

Product Highlights

- Measurement functions include temperature, 4-wire resistance, peak detection, low ohms, and Agilent 3458A emulation (Model 2002)
- Built-in slot for scanner card
- Multiple measurement display (Models 2001 and 2002)
- Dry circuit measure function limits test voltage when testing contact or connector resistances (Model 2010)

Add a plug-in scanner card to turn any of these DMMs into a complete scan and measure system.

Use the multiple display capability (Model 2001/2002) to simultaneously display different aspects of one signal.

Model	Resolution	Basic V DC Accuracy, 1 Year (% Reading + % Range)	Measurements	Interface	Pricing (USD)
2001	7½	0.0024 + 0.0004	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, Crest, Peak	GPIB	$4,690
2002	8½	0.0010 + 0.00015	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, Crest, Peak	GPIB	$6,270
2010	7½	0.0024 + 0.0004	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, Cont., Diode, Therm., Dry Circ.Ω, Ratio	GPIB, RS-232	$3,050

Recommended Accessories

2000-SCAN	10-channel Scanner Card	$622
2001-SCAN	10-channel Scanner Card with Two Highspeed Channels	$841
2001-TSCAN	9-channel Thermocouple Scanner Card	$1,140
5805	Kelvin Probes, 0.9m (3ft)	$238
5805-12	Kelvin Probes, 3.6m (12ft)	$313
5808	Low Cost, Single Pin, Kelvin Probes	$115
5809	Low Cost, Kelvin Clip Lead Set	$173
7007-1	Shielded GPIB Cable, 1m (3.3ft)	$118
7007-2	Shielded GPIB Cable, 2m (6.6ft)	$131
KP-CI-488LPA	IEEE-488 Interface/ Controller for the PCI Bus	$475
KUSB-488B	IEEE-488 USB to GPIB Interface Adapter	$539
4288-1	Single Fixed Rack Mount Kit	$95

Ships with Product

- Model 8605 High Performance Modular Test Leads (Models 2001, 2002)
- Model 1751 Safety Test Leads (Model 2010)
- Option Slot Cover (Models 2001, 2002)
- Calibration Data
- User Manual, Service Manual
- Power Cord
- 1-year Warranty

Learn more with the "Peak Detection with the Model 2001 DMM" Application Note.

DATA SHEET

DMM7510 7½-Digit Graphical Sampling Multimeter

The DMM7510 combines all the advantages of a precision digital multimeter, a graphical touchscreen display, and a high speed, high resolution digitizer to create an industry first: a graphical sampling multimeter. The digitizer gives the Model DMM7510 unprecedented signal analysis flexibility; the five-inch capacitive touchscreen display makes it easy to observe, interact with, and explore measurements with "pinch and zoom" simplicity. This combination of high performance and high ease of use offers unparalleled insight into your test results.

Product Highlights

- Precision multimeter with 3½- to 7½-digit resolution
- 100mV, 1Ω, and 10µA ranges offer the sensitivity needed for measuring low level signals
- Capture and display waveforms or transients with 1MS/sec digitizer
- Large internal memory buffer; store over 11 million readings in standard mode or 27.5 million in compact mode
- Display more with five-inch, high resolution touchscreen interface
- Extensive software available including: Test Script Builder, KickStart Startup Software, and LabVIEW and IVI Drivers (available at www.keithley.com)

The high speed digitizing function allows capturing and displaying voltage and current waveforms.

Advanced triggering options make it possible to capture a signal at precisely the right point.

Model	Resolution	Basic V DC Accuracy, 1 Year (% Reading + % Range)	Measurements	Interface	Pricing (USD)
DMM7510	7 ½	0.0014 + 0.00012	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, Cont., Diode, Dry Circ., Ω, Ratio, Cap, Digitize V, Digitize I	GPIB, USB-TMC, LAN-LXI	$3,990

Recommended Accessories

5804	Kelvin (4-Wire) Universal 10-Piece Test Lead Kit	$213
5805	Kelvin (4-Wire) Spring-Loaded Probes	$238
5806	Kelvin Clip Lead Set	$282
5808	Low Cost Single-pin Kelvin Probe Set	$115
5809	Low Cost Kelvin Clip Lead Set	$173
KP-CI-488LPA	IEEE-488 Interface for PCI Bus	$475

Recommended Accessories

KUSB-488B	IEEE-488 USB-to-GPIB Interface Adapter	$539
7007-1	Shielded GPIB Cable, 1m (3.2ft)	$118
7007-2	Shielded GPIB Cable, 2m (6.5ft)	$131
2450-TLINK	DB-9 to Trigger Link Connector Adapter	$52
8503	DIN-to-BNC Trigger Cable	$93
4299-8	Single Fixed Rack Mount Kit	$312

Ships with Product

- 1756 Test Leads
- USB-B-1 USB Cable, Type A to Type B, 1m (3.3 ft)
- CA-180-3A TSP-Link/Ethernet Cable
- Documentation CD
- DMM7510 QuickStart Guide
- KickStart Software Quick Start Guide
- Calibration Certificate
- Power Cord
- 1-Year Warranty
- Test Script Builder Software (available at www.keithley.com)
- KickStart Startup Software (available at www.keithley.com)
- LabVIEW® and IVI Drivers (available at www.keithley.com)

Learn more with the "Characterizing Power-up and Power-down Transients Using the Model DMM7510 7½-Digit Graphical Sampling Multimeter".

DATA SHEET

VIRTUAL TOUR

360° VIEW

DMM4020

Make measurements, not compromises. Measure a variety of parameters— from volts, ohms and amps to frequency—with one instrument. Save time with front-panel shortcut keys and built-in limit testing. Performance. Reliability. Legendary ease of use. One instrument. Looks like you can have it all.

Product Highlights

- 5.5 digit resolution
- Basic V dc accuracy of up to 0.015%
- Volts, ohms, amps and frequency measurements
- Dedicated dc leakage current measurement
- CAT I 1000 V, CAT II 600 V

Make accurate 4-wire resistance measurements with only two test leads!

With the unique dual display, you can measure two different parameters of the same signal from one test connection.

Models	Display	Resolution (Digits)	Measurements	Basic V dc accuracy (% Reading + % Range)	Pricing (USD)
DMM4020	Dual; Numeric	5.5	V ac, V dc, I dc, I ac, Ω, Cont, Diode, Freq	0.015 + 0.004 (yr.)	$849

Recommended Test Leads

Test Leads		
196-3520-xx	Premium Test Leads (TL710 replacement/ spare)	$37
TL705	2x4 Wire Ohm 1000V Test Lead	$84
TL725	2x4 Wire Ohm SMD Test Tweezers	$112

Recommended Accessories

Accessories		
ACD4000	Soft Carrying Case	$259
HCTEK-4321	Hard Carrying Case	$829
RMU2U	Rackmount Kit	$155
013-0369-xx	Calibration Fixture 4-terminal short	$49

Recommended Service

SILV100	5-year Extended Warranty	$170

Another Product for Consideration

If you need greater accuracy, the DMM4050 provides 6.5 digits of resolution and up to 0.0024% basic V dc accuracy.

Ships with Product

- One Set TL710 Test Leads
- RS-232 to USB Adapter Cable
- NI LabVIEW SignalExpress™ TE (LE version) Software
- Statement of Calibration Practices
- User Manual & Documentation on CD
- Power Cord
- 3-year Warranty

Learn more with the "Using the DMM Series to Make Simple and Accurate Resistance Measurements" application note.

DATA SHEET

VIRTUAL TOUR

360° VIEW

DMM4040/4050

Meet the multimeter to rule them all. Make a wide range of measurements—from volts, ohms and amps to frequency, temperature and capacitance—with one instrument. Monitor and record measurements over time, or environmental changes with built-in histogram, TrendPlot™ testing and statistics analysis modes. Get unparalleled ease of use with a dual display and USB connectivity. Hello, efficiency. Goodbye, complexity.

Product Highlights

- 6.5 digit resolution
- Basic V dc accuracy of up to 0.0024%
- Volts, ohms, amps, frequency and period measurements
- Capacitance and temperature measurements (DMM4050)
- CAT I 1000 V, CAT II 600 V

Make accurate 4-wire resistance measurements with only two test leads!

See how your device is changing over time with built-in analysis modes – TrendPlot™, histograms and statistics.

Models	Display	Resolution (Digits)	Measurements	Basic V dc accuracy (% Reading + % Range)	Pricing (USD)
DMM4040	Dual; Numeric & Graphical	6.5	V ac, V dc, I dc, I ac, Ω, Continuity, Diode, Freq, Period	0.0035 + 0.0005	$1,170
DMM4050	Dual; Numeric & Graphical	6.5	V ac, V dc, I dc, I ac, Ω, Continuity, Diode, Freq, Period, Temp., Capacitance	0.0024 + 0.0005	$1,450

Recommended Test Leads

Temperature Probes		
TP750	100 Ohm RTD Temperature Probe (DMM4050 only)	$566
Test Leads		
196-3520-xx	Premium Test Leads (TL710 replacement/ spare)	$37
TL705	2x4 Wire Ohm 1000V Test Lead	$84
TL725	2x4 Wire Ohm SMD Test Tweezers	$112

Recommended Accessories

Accessories		
ACD4000	Soft Carrying Case	$259
HCTEK-4321	Hard Carrying Case	$829
RMU2U	Rackmount Kit	$155
013-0369-xx	Calibration Fixture 4-terminal short	$49

Recommended Service

SILV100	5-year Extended Warranty	$170

Another Product for Consideration

The PWS DC Power Supply Series is designed to stack with the DMM Series, saving you bench space.

Ships with Product

- One Set TL710 Test Leads
- RS-232 to USB Adapter Cable
- NI LabVIEW SignalExpress™ TE (LE version) Software
- Calibration Certificate
- User Manual & Documentation on CD
- Power Cord
- 3-year Warranty

Learn more with the "Measurement Statistics and Histograms with the Tektronix DMM4050 and DMM4040 Multimeters" application note.


Measurement Statistics and Histograms with the Tektronix DMM4050 and DMM4040 Multimeters
Application Note
Tektronix

Data Acquisition Systems

Keithley data acquisition systems combine precision measurement, switching, and control into a single, tightly integrated enclosure. They offer affordable alternatives to separate DMMs and switch systems, dataloggers/recorders, plug-in card data acquisition equipment, and VXI/PXI systems.

	Series 2700	Series 3700A
DMM Resolution	6½ Digits	7½ Digits
Switching Density	Up to 80, 2-pole channels (2700/2701) Up to 200, 2-pole channels (2750)	Up to 576, 2-pole channels
Special Features	Front panel DMM jacks, Non-volatile memory buffer, Solid State temperature scanning	USB Flash Drive support, 1 Ohm measure range, Solid State temperature scanning
Switch Features	Up to 40, 2-pole Channels and 12 card options	Up to 96, 2-pole Channels and 10 card options
Interface	GPIB, RS-232 (Models 2700 and 2750) LAN, RS-232 (Model 2701)	GPIB, LAN (LXI), USB-TMC, TSP-Link® Channel Expansion Bus
Software	KickStart Startup Software, LabVIEW and IVI drivers. Available at www.keithley.com	Test Script Builder, LXI Discovery Browser, LabVIEW and IVI drivers. Available at www.keithley.com
Starting Price	$1,650	$2,030

Choosing Your Data Acquisition System

Designing the switching for an automated test system demands an understanding of the signals to be switched and the tests to be performed. The following is a cursory look at key decision points in the design of a switching system.

1 Switch Configuration

Multiplex switching can be used to connect one instrument to multiple devices or multiple instruments to a single device. Multiplex switching permits multiple simultaneous connections and sequential or non-sequential switch closures. A matrix switch configuration is the most versatile because it can connect multiple inputs to multiple outputs. The isolated, or independent, switch configuration consists of individual relays, often with multiple poles, with no connections between relays. For scanner (or multiplex) cards, the channel is used as a switched input in measuring circuits or as a switched output in sourcing circuits. For switch cards, each channel's signal paths are independent of other channels.

2 Relay Types

Three key relay types are used. Electromechanical relays offer the widest power range and a good life and speed at a relatively low cost. Reed relays cost more but offer less contact wear and bounce for a better life and speed than electromechanical. Solid-state relays cost still more, but offer the best life and speed with no contact wear or bounce.

3 Systemization

Connection types found on switch cards include both screw terminals and mass-terminated connectors. At the instrument level, TSP-Link master/slave connection offers easy system expansion between Series 3700A mainframes and to connect to Series 2600B SourceMeter instruments.

DATA SHEET

Series 2700

The Series 2700 System Switch/Multimeter combines precision measurement, switching, and control in a single, tightly integrated enclosure for either rack-mount or bench-top applications used by data loggers. The 2700 Series offers two- and five-slot models, as well as an Ethernet-based model for high speed and long distance communication.

Product Highlights

- 6½-digit measurement engine
- Front panel DMM jacks
- 300 volt isolation between channels and from any channel to ground to maintain signal integrity
- Mass terminated or screw terminal connector options
- Full per-channel card configurability
- Non-volatile memory buffer
- Choice of 12 switch/control plug-in modules

Install up to five switch/control modules in the 2750 mainframe or up to two in the 2700 and 2701 mainframes.

Screw terminals use oversize connectors for easier, mistake-free wiring. Removable terminals available for some models.

Model	Mainframe Size	Interfaces	Resolution (Digits), Accuracy	Advance Measure Functions	Pricing (USD)
2700	2U, ½ Rack	GPIB, RS232	6½ Digits, 0.003%	Temperature, 4-Wire Resistance	$1,650
2701	2U, ½ Rack	Ethernet, RS232	6½ Digits, 0.003%	Temperature, 4-Wire Resistance	$1,990
2750	2U, Full Rack	GPIB, RS232	6½ Digits, 0.003%	Temperature, 4-Wire Resistance, Low Ohms	$2,590

Plug-in Cards

7700	Dual 1x10 / Electromechanical Relay	$501
7701	Dual 1x16 / Electromechanical Relay	$726
7702	Dual 1x20 / Electromechanical Relay	$951
7703	Dual 1x16 / Reed Relay	$1,140
7705	40 Independent Relay / Electromechanical Relay	$839

Recommended Accessories

7007-1	Shielded IEEE-488 Cable, 1m (2700, 2750)	$118
7007-2	Shielded IEEE-488 Cable, 2m (2700, 2750)	$131
7788	50-Pin D-Shell Connector Kit (for 7703 & 7705 Mods.)	$91
7789	50-Pin/25-Pin D-Shell Kit	$91
7790	50-Pin Male/Female, 25-Pin Male IDC D-Shell Con. Kit	$91

Plug-in Cards

7706	16 Digital I/O, 2 Analog Outputs, 1x20 Multiplexer	$951
7707	32 Digital I/O, 1x10 Multiplexer	$839
7708	Dual 1x20 / Electromechanical Relay	$951
7709	6x8 / Electromechanical Relay	$951
7710	Dual 1x10 / Solid State Relay	$726
7711	Dual 1x4, 2GHz / RF Relay	$615
7712	Dual 1x4, 3.5GHz / RF Relay	$2,240

Ships with Product

- Product CD (Includes Users Manual, Drivers, Etc.)
- Ethernet Crossover Cable (Model 2701 Only)
- Calibration Certificate
- Quick Reference Manual
- ExceLINX Software
- Power Cord
- 1-year Warranty

Learn more with the "Switching Handbook: A Guide to Signal Switching in Automated Test Systems."

DATA SHEET

Series 3700A

The Series 3700A DMM/switch system offers a scalable, instrument grade switching and multi-channel measurement solution for automated testing of electronic devices. The system includes a high performance DMM with up to six switch/control cards and can support up to 576 two-wire multiplexer channels for unrivaled density and low per channel cost.

Product Highlights

- Mainframe variations (DMM and keypad/display optional)
- High performance (1 Ohm resistance, 10µA DCI range) 7.5 Digit multimeter
- High density switching (Up to 720 one-wire multiplexer channels, 2,688 one-wire matrix crosspoints)
- TSP control and TSP-Link for Intelligent distributed control
- Embedded startup/control software



Use the built-in web server interface to configure the system, build and run an automated scan list, and analyze data.

Model 3706A-NFP eliminates keypad and display for automated test rack applications.

Model (Mainframe)	DMM	Front Panel Keypad & Display	Resolution (Digits), Accuracy	Interface	Pricing (USD)
3706A	Yes	Yes	7½ Digits, 0.0025%	GPIB, LAN (LXI), USB-TMC, TSP-Link® Channel Expansion Bus	$2,930
3706A-S	No	Yes	NA	GPIB, LAN (LXI), USB-TMC, TSP-Link® Channel Expansion Bus	$2,260
3706A-NFP	Yes	No	7½ Digits, 0.0025%	GPIB, LAN (LXI), USB-TMC, TSP-Link® Channel Expansion Bus	$2,720
3706A-SNFP	No	No	NA	GPIB, LAN (LXI), USB-TMC, TSP-Link® Channel Expansion Bus	$2,030

Plug-in Cards

3720	Dual 1x30 Multiplexer: 300V, 2A, Auto-CJC with 3720-ST accessory	$1,220
3721	Dual 1x20 Multiplexer: 300V, 3A, Auto-CJC with 3721-ST accessory	$1,050
3722	Dual 1x48 Multiplexer: 300V, 2A	$1,680
3723	Dual 1x30 Multiplexer: 200V, 1.25A, Reed Relay	$1,380
3724	Dual 1x30 Multiplexer: 200V, 0.12A, Solid State Relay, Auto-CJC with 3724-ST accessory	$1,750

Plug-in Cards

3730	6x16 Matrix: 300V, 2A	$1,680
3731	6x16 Matrix: 200V, 2A, Reed Relay	$2,200
3732	Quad 4x28 Matrix: 200V, 1.2A, Reed Relay	$5,960
3740	Independent Relay: 28 Form C: 300V, 3A; 4 Form A: 250VAC, 7A	$1,050
3750	Control: 40 Digital I/O 2 Analog Outputs, 4 Counter	$1,410

Recommended Accessories

3706-BAN	DMM Adapter Cable	$221
3706-TLK	Test Lead Kit	$338
KUSB-488B	IEEE-488 USB to GPIB Interface Adapter	$539
4288-1	Single Fixed Rack Mount Kit	$95
4288-10	Fixed Rear Rack Mount Kit	$120

Ships with Product

- Test Script Builder Software Suite CD
- Series 3700A Product CD (Includes LabVIEW, IVI C, and IVI.COM Drivers)
- Ethernet Crossover Cable
- Calibration Certificate
- Quick Reference Manual
- Power Cord
- 1-year Warranty

Learn more with the "Optimizing Switched Measurements with the Series 3700 System Switch/Multimeter and Series 2600 System SourceMeter® Instruments Through the Use of TSP" application note.

Ultra-Sensitive Measurement Instruments

Scientists and researchers worldwide rely on Keithley Electrometers, Picoammeters, and Nanovoltmeters for making low-level measurements beyond the capabilities of a typical digital multimeter. Keithley Electrometers and Picoammeters provide low current and high resistance measurements and Keithley Nanovoltmeters measure low voltages.

	2182A Nanovoltmeter	6220 / 6221 Current Sources	6485 / 6487 / 6482 Picoammeters / Picoammeter & Voltage Source	6514 / 6517B / 6430 Electrometers
Current Min/Max	--	100fA / 100mA	1fA / 20mA	10aA / 100mA
Voltage Min/Max	1nV / 100V	--	--	1mV / 200V
Resistance Min/Max	10nΩ /1GΩ (with Model 6220 or 6221)	10nΩ/1GΩ (with Model 2182A)	10Ω/1PΩ (with Model 6487)	10mΩ / 10PΩ
Resolution	7½ Digits	4½ Digits	5½ Digits (6485, 6487) 6½ Digits (6482)	5½ Digits (6514, 6517B) 6½ Digits (6430)
Input Connection / Interface	Low Thermal / GPIB, RS-232	3 Slot Triax / GPIB, RS-232 (LAN on 6221)	BNC (6485) 3 Slot Triax (6482, 6487) / GPIB, RS-232	3 Slot Triax / GPIB, RS-232
Starting Price	$3,330	$3,770	$1,820	$4,970

Choosing Your Specialized Low Level Instrument

To help you choose the appropriate specialized low level instrument for your application, the most common selection criteria are listed below, including helpful tips for determining the correct specialized low level instrument for your requirements.

1 Resolution

Resolution means how fine a meter's measurement is and lets you determine if it's possible to see a small change in the signal. Resolution is described by digits and counts. A 6.5-digit instrument can display six full digits ranging from 0 to 9, and one "half" digit that displays either a 1 or is left blank. A 6.5-digit instrument can display up to 1,999,999 counts of resolution.

2 Accuracy

Accuracy is the largest allowable error that will occur under specific operating conditions and is an indication of how close the instrument's displayed measurement is to the actual value of the signal measured. Accuracy is typically expressed as a percent of reading. For example, an accuracy of 1% of reading means that, for a displayed reading of 100 volts, the actual value of the voltage is between 99 volts and 101 volts.

3 Low Current/High Resistance Measurements

Low current/high resistance measurements evaluate the insulation qualities of materials or components. Typically, a voltage up to 500 or 1000 volts is applied and the resulting current is measured, which can be in the range of picoamperes (10E-12A) or lower. A digital multimeter may seem like the right instrument for these measurements. But if the current is below 1µA or the resistance is above 10MΩ, the correct solution is an Electrometer or Picoammeter.

4 Low Voltage/Low Resistance Measurements

Low resistance/low voltage measurements evaluate the conduction or contact qualities of materials or components. Typically, a current under 100mA but as low as 1µA is applied and the resulting voltage is measured, which can be in the range of microvolts and even nanovolts. For low voltage, choose a Nanovoltmeter or low noise multimeter. For low resistance, a Nanovoltmeter/current source combination or switch/multimeter is the correct solution.

DATA SHEET

2182A Nanovoltmeter

The two-channel Model 2182A Nanovoltmeter is optimized for making stable, low noise voltage measurements and for characterizing low resistance materials and devices reliably and repeatably. It provides higher measurement speed and significantly better noise performance for voltage meters than alternative low voltage measurement solutions.

Product Highlights

- Low noise voltage measurements at high speeds
- Delta mode coordinates measurements with a reversing current source at up to 24Hz with 30nV p-p noise (typical) for one reading. Averages multiple readings for greater noise reduction
- Built-in thermocouple linearization and cold junction compensation
- Dual channels



Comparison of the Model 2182A's DC noise performance with a nanovolt/ micro-ohmmeter's.



Results from a Model 2182A and Model 6220 using the delta mode to measure a 10mΩ resistor with a 20µA test current.

Model	Voltage	Temperature	Resistance	Channels	Buffer Size	Pricing (USD)
2182A	1nV – 100V	-200°C to 1820°C	10nΩ to 200MΩ (requires 6220 or 6221)	2	1,024 rdgs	$3,330

Recommended Accessories

6220	DC Precision Current Source (used with 2182A for low current/ voltage measurement)	$3,770
6221	AC and DC Current Source (used with 2182A for low current/ voltage measurement)	$5,020
4288-1	Single Fixed Rack Mounting Kit	$95
4288-2	Dual Fixed Rack Mounting Kit	$133
KPCI-488LPA	IEEE-488 Interface/ Controller for the PCI Bus	$475
KUSB-488B	I EEE-488 USB-to-GPIB Interface Adapter	$539
2107-30	Low Thermal Input Cable with spade lugs, 9.1m (30 ft)	$336
2182-KIT	Low Thermal Connector with strain relief	$189
2187-4	Input Cable with safety banana plugs	$406

Recommended Accessories

2188	Low Thermal Calibration Shorting Plug	$222
7007-1	Shielded GPIB Cable, 1m (3.2 ft)	$118
7007-2	Shielded GPIB Cable, 2m (6.5 ft)	$131
7009-5	Shielded RS-232 Cable, 1.5m (5 ft)	$59
8501-1	Trigger Link Cable, 1m (3.2 ft)	$68
8501-2	Trigger Link Cable, 2m (6.5 ft)	$74
8503	Trigger Link Cable to 2 male BNC connectors	$93

Ships with Product

- 2107-4 Low Thermal Input Cable with Spade Lugs, 1.2m (4 ft)
- User Manual
- Service Manual
- Contact Cleaner
- Power Cord
- Alligator Clips

Learn more with the "Low-Level Pulsed Electrical Characterization with the Model 6221/2182A Combination" application note.

DATA SHEET

6220 / 6221 Current Sources

Keithley precision current sources include both broad-purpose Model 6220 and high-performance Model 6221. Their high sourcing accuracy and built-in control functions make them ideal for Hall Effect, resistance (using delta mode), pulsed, and differential conductance measurements. Programmable pulse widths limit power dissipation.

Product Highlights

- $10^{14}\Omega$ output impedance ensures stable current sourcing into variable loads
- 64k-point source memory for comprehensive test current sweeps
- (Model 6221) Source AC currents from 4pA to 210mA peak to peak for AC characterization of components and materials. The 10MHz output update rate generates smooth sine waves up to 100kHz



Perform, analyze, and display differential conductance measurements.



Measurements are line synchronized to minimize 50/60Hz interference.

Model	Current	Resistance	Sweep Points	PC Interface	Pricing (USD)
6220	100fA – 100mA	10nΩ to 200MΩ (requires 2182A)	65,536 (64k)	GPIB, RS-232	$3,770
6221	100fA – 100mA	10nΩ to 200MΩ (requires 2182A)	65,536 (64k)	GPIB, RS-232, Ethernet	$5,020

Recommended Accessories

2182A	Nanovoltmeter (used with 6220/6221 for low current/voltage measurement)	$3,330
237-ALG-2	Low Noise Triax Cable, 3-slot triax to alligator clips	$234
7007-1	Shielded GPIB Cable, 1m (3.2 ft)	$118
7007-2	Shielded GPIB Cable, 2m (6.5 ft)	$131
7007-4	Shielded IEEE-488 Cable, 4m (13.1 ft)	$147
7009-5	Shielded RS-232 Cable, 1.5m (5 ft)	$59
7078-TRX-3	Low Noise Triax Cable, 3-Slot Triax Connectors, 0.9m (3 ft)	$164
7078-TRX-5	Low Noise Triax Cable, 3-Slot Triax Connectors, 1.5m (5 ft)	$175
7078-TRX-10	Low Noise Triax Cable, 3-Slot Triax Connectors, 3m (10 ft)	$190
7078-TRX-20	Low Noise Triax Cable, 3-Slot Triax Connectors, 6m (20 ft)	$213

Recommended Accessories

8501-1	Trigger Link Cable with male Micro-DIN connectors at each end, 1m (3.3 ft)	$68
4288-1	Single Fixed Rack Mounting Kit	$95
4288-2	Dual Fixed Rack Mounting Kit	$133
KP-CI-488LPA	IEEE-488 Interface/ Controller for the PCI Bus	$475
KUSB-488B	I EEE-488 USB-to-GPIB Interface Adapter	$539

Ships with Product

- 6.6 ft (2m), Low Noise, Input Cable with Triax-to-Alligator Clips
- 6.6 ft (2m) Trigger Link Cable to connect 622x to 2182A
- Ethernet Crossover Cable (6221 only)
- Communication Cable between 2182A and 622x
- Safety Interlock Connector
- Instruction manual on CD
- Getting Started manual (hardcopy)
- Software (downloadable)

Learn more with the "Determining Resisitivity and Conductivity Type using a Four-Point Collinear Probe and the Model 6221 Current Source" application note.

DATA SHEET

6485, 6487 Picoammeters, 6482 Picoammeter & Voltage Source

Keithley Picoammeters combine sensitive current measurement with high speed. The Model 6485 Picoammeter offers fast, sensitive current measurement. The Model 6487 offers improved measurement capability, and adds a high resolution 500V source. The Model 6482 offers two independent Picoammeter/voltage source channels.

Product Highlights

- Measure currents down to 1fA
- Voltage and resistance measurement options
- Voltage burden <200µV (most models)
- 5½- to 6½-digit resolution (most models)
- Feedback ammeter design for higher accuracy



Dark current characterization of a photodiode using Picoammeter and voltage source (such as the Model 6482).



MOSFET sub-threshold voltage test using Picoammeters and voltage sources (such as the Model 6482).

Model	Current	Resistance	Reading Rate	Input Connections	Pricing (USD)
6482	1fA – 20mA (2 ch)	N/A	900 rdgs/s	3-slot triax, BNC (via included adapter)	$4,090
6487	10fA – 20mA	Up to 10^{+16} Ω	1000 rdgs/s	3-slot triax	$4,010
6485	10fA – 20mA	N/A	1000 rdgs/s	BNC	$1,820

Recommended Accessories

4802-10	Low noise BNC Input Cable, 3m (10ft) (for 6485)	$85
4803	Low Noise Cable Kit (for 6485)	$153
6517-ILC-3	Interlock Cable for 8009 Resistivity Test Fixture (6487 Only)	$94
7007-1	Shielded IEEE-488 Cable, 1m (3.3 ft)	$118
7007-2	Shielded IEEE-488 Cable, 2m (6.6 ft)	$131
7007-4	Shielded IEEE-488 Cable, 4m (13.1 ft)	$147
7009-5	RS-232 Cable	$59
7078-TRX-10	Low Noise Triax Cable, 3.0m (10 ft) (6487 Only)	$190
7078-TRX-20	Low Noise Triax Cable, 6.0m (20 ft) (6487Only)	$213
7754-3	BNC to Alligator Cable (for 6485)	$47
8501-1	Trigger Link Cable with male Micro-DIN connectors at each end, 1m (3.3 ft)	$68

Recommended Accessories

CS-565	BNC Barrel (for 6485)	$17
237-TRX-BAR	Triax Barrel (for 6487)	$115
7078-TRX-BNC	Triax-to-BNC Adapter	$80
8009	Resistivity Test Fixture (for 6487)	$2,420
4288-1	Single Fixed Rack Mounting Kit	$95
4288-2	Dual Fixed Rack Mounting Kit	$133
KP-CI-488LPA	IEEE-488 Interface/ Controller for the PCI Bus	$475
KUSB-488B	IEEE-488 USB-to-GPIB Interface Adapter	$539

Ships with Product

- 7078-TRX-BNCTriax-to-BNC Connector (2×) (Model 6482)
- CA-186-1B Ground Connection Cable, Banana to Screw-Lug (Model 6487)
- CAP-31 Protective Shield/Cap (3-lug) (Model 6487)
- CS-459 Safety Interlock Plug (Model 6487)
- 7078-TRX-3 Low Noise Triax Input Cable, 1m (3 ft) (Model 6487)
- 8607 High Voltage Banana Cable Set for Voltage Source Output (Model 6487)
- CAP-18 Protective Shield/Cap (2-lug) (Model 6485)
- 4801 Low Noise BNC Input (Model 6485)

Learn more with the “Low Current Measurements” application note.

DATA SHEET

6514 / 6517B / 6430 Electrometers

Our high resistance Electrometers provide voltage source and high resistivity measurements for sensitive measurement. They combine flexible interfacing capabilities with current sensitivity, charge measurement capabilities, resolution, and speed. The Model 6430 offers unmatched low current sensitivity.

Product Highlights

- Measure low current & high voltage, resistance, and charge
- Resistance measurements to 10PΩ
- Current sensitivity as low as 10aA (6430)
- Voltage burden as low as 200µV
- Superior accuracy and sensitivity



This illustrates how the Model 6514's measurement can be adjusted to reflect the true dark current of the photodiode.

A Model 6517B is well suited for application where the volume resistivity needs to be measured.

Model	Current	Voltage	Resistance	Charge	Input Connections	Pricing (USD)
6517B	100aA – 20mA	10µV – 200V	100Ω – 10PΩ	10fC – 2µC	3-slot triax	$8,110
6514	100aA – 20mA	10µV – 200V	10mΩ – 200GΩ	10fC – 20µC	3-slot triax	$4,970
6430	10aA – 100mA	1µV – 200V	1µΩ – >20TΩ	--	3-slot triax	$14,300

Recommended Accessories

237-ALG-2	Low Noise Triax Cable, 3-slot triax to alligator clips	$234
6517B-ILC-3	Interlock Cable (For 6517B only)	$110
7078-TRX-3	Low Noise Triax Cable, 3-Slot Triax Connectors, 0.9m (3 ft)	$164
7007-1	Shielded IEEE-488 Cable, 1m (3.2 ft)	$118
8501-1	Trigger Link Cable, 1m (3.3 ft)	$68
8503	Trigger Link Cable to 2 male BNCs, 1m (3.3 ft)	$93
8607	1kV Source Banana Cables (for 6517B only)	$62
6517-RH	Humidity Probe with Extension Cable (6517B only)	$553
6517-TP	Temperature Bead Probe (included with 6517B) (6517B only)	$56
8009	Resistivity Test Fixture (for 6517B)	$2,420

Recommended Accessories

237-BNC-TRX	Male BNC to 3-Lug Female Triax Adapter (for 6517B)	$115
237-TRX-NG	Triax Male-Female Adapter with Guard Disconnected	$151
7078-TRX-BNC	3-Slot Male Triax to BNC Adapter	$80
7078-TRX-GND	3-Slot Male Triax to BNC Adapter with guard removed (for 6517B)	$68
4288-1	Single Fixed Rack Mounting Kit	$95
4288-2	Dual Fixed Rack Mounting Kit	$133
6521	Low Current Scanner Card (for 6517B)	$2,210
6522	Voltage/Low Current Scanner Card (for 6517B)	$2,990
KP-CI-488LPA	IEEE-488 Interface/ Controller for the PCI Bus	$486
KUSB-488B	IEEE-488 USB-to-GPIB Interface Adapter	$539

Ships with Product

- Low Noise Triax Cable, 3-slot triax to alligator clips (6514, 6517B)
- 6430-322-1B Low noise Triax Cable, 3-slot triax to alligator clips (20cm)
- Dual Test Leads (6430)
- 6517-TP Thermocouple Bead Probe (6517B)
- CS-1305 Interlock Connector (6517B)
- PreAmp Cable 2m (6.6ft)

Learn more with the "Volume and Surface Resistivity Measurements of Insulating Materials Using the Model 6517A Electrometer/High Resistance Meter" application note.

Power Supplies

Tektronix and Keithley power supplies offer a wide range of performance. Get single channel models with superior accuracy and 10nA current measurement resolution. New high voltage power supplies combine high voltage with sensitive, low current measurement for high voltage device testing and characterization and high voltage research. For multiple source needs, select a dual channel or triple channel supply. All channels are isolated and fully programmable. For testing battery-operated devices, consider a battery simulator.

Category	Description	Channels	Max Voltage/ Max Current	Resolution	Voltage Accuracy	Current Accuracy	Interface	Starting Price
Tektronix PWS2000 Series (4 models)	Manual	1	18V-72V/1.5A-6A	10mV, 10mA	0.03% ± 10mV	0.1% ± 5mA	Not applicable	$427
Tektronix PWS4000 Series (5 models)	USB Programmable Single Channel	1	20V-72V /1.2A-5A	1mV, 0.1mA	0.03% ± 3mV	0.05% ± 1mA	USB	$922
Keithley 2200 Series (5 models)	USB and GPIB Programmable Single Channel	1	20V-72V /1.2A-5A	1mV, 0.1mA	0.03% ± 3mV	0.05% ± 1mA	USB, GPIB	$958
Keithley Model 2231A-30-3	Optional USB Triple-channel	3	CH1/2: 30V/3A CH3: 5V/3A	10mV, 1mA	0.06% ± 20mV	0.2% ± 10 mA	Optional USB	$650
Keithley 2220/2230 Series (8 models)	USB Multi-Channel; USB and GPIB Multi-Channel	2 (2220 Series) 3 (2230 Series)	CH1/2-30V / 1.5A (2220 Series) CH1/2-30V / 1.5A, CH3-6V / 5A (2230 Series)	1mV, 1mA	0.2% ± 10 mA	0.1% ± 15 mA	USB USB & GPIB (-G versions)	$983
Keithley 2260B Series (4 models)	360W and 720W Wide output range USB, LAN, and Optional GPIB	1	30V-80V / 13.5A-72A	1mV, 1mA	0.1% ± 10mV	0.1% ± 10mA	USB, LAN, analog, and optional GPIB	$1,420
Keithley 2268 Series (6 models)	850W 1U high, half-rack wide, programmable, with 5V and 15V auxiliary outputs	1	20V-150V/ 5.6A-42A	2.4mV, 0.67mA	0.1% of Full Scale	0.2% of Full Scale	USB, GPIB, LAN,RS-232, RS-485, and analog	$2,500
Keithley Models 2280S-32-6 2280S-60-3	Precision measurement 6½-digit measurement resolution	1	32V-60V/3.2A-6A	0.1mV, 10nA	0.02% ± 2mV	0.05% ± 250uA	USB, GPIB, and LAN	$1,990
Keithley Models 2290-5 2290-10	High Voltage	1	5kV / 5mA (2290-5) 10kV / 1mA (2290-10)	1V, 1µA	±0.01% (2290-5), ±6V (2290-10)	±0.01% (2290-5), ±5µA (2290-10)	GPIB (2290-5), GPIB, RS-232 (2290-10)	$3,890
Keithley Models 2302, 2302-PJ, 2306, 2306-PJ, 2306-VS, 2308	Battery simulator	1 (2302) 2 (2306, 2308)	15V / 5A	1mV, 100nA	0.05% + 3mV	0.2% + 1µA	GPIB	$2,770
Keithley Models 2303, 2303-PJ, 2304A	Fast Transient Response	1	15V / 5A (2303) 20V / 5A (2304A)	1mV, 100nA	0.05% + 3mV	0.2% + 1µA	GPIB	$2,100

Choosing Your Programmable Power Supply

To help you choose the appropriate power supply for your application, the most common selection criteria are listed below.

1 Output Voltage, Current, and Power

Ensure that the power supply has sufficient voltage output and current output to meet your needs. Also ensure that the supply can deliver the required power. Some power supply V-I output characteristics offer a trade-off between maximum voltage and maximum current (hyperbolic V-I output).

2 Setting Resolution and Accuracy

Voltage and current settings (sometimes called limits or programmed values) each have resolution and accuracy specifications associated with them. The resolution of these settings determines the minimum increment in which the output may be adjusted. The accuracy describes the extent to which the value of the output matches international standards and is typically expressed as ± (% of reading + offset).

3 Ripple and Noise

Spurious AC components on the output of a DC supply are called ripple and noise. The term “ripple” refers to periodic AC on the output. When viewed in the frequency domain, ripple shows up as spurious responses. Unlike ripple, which is periodic, noise is random. A power supply’s ripple and noise is specified within a bandwidth, and should be specified for both current and voltage.

4 Features and Programmability

When selecting your power supply, select the supply that has the functionality you need. Consider a multiple-channel supply as a cost-effective solution for applications requiring multiple power sources. For maximum accuracy, consider supplies that have remote sensing. When developing and testing battery-operated devices, consider a special purpose battery-simulating supply.

DATA SHEET

360° VIEW

PWS2000 Series Single Channel Power Supplies

More power. More features. More value. Support many different applications with wide output voltage and current ranges, and down to 10 mV/10 mA resolution. Save time with a numeric keypad for fast and accurate voltage/current selection. Strain less with a bright, large readout digital display. All backed by Tektronix reliability.

Product Highlights

- Linear regulation
- 0.05% basic DC voltage accuracy
- 0.2% basic DC current accuracy
- Less than 3 mVp-p ripple and noise
- 20 user-defined setup memories

The numeric keypad makes it easy to specify a precise current limit before you start your test.

PWS Series power supplies are designed to be stacked with other Tektronix bench instruments to save you valuable bench space.

Models	Output Voltage	Output Current	Programmable	Pricing (USD)
PWS2185	18 V	5 A	No	$427
PWS2323	32 V	3 A	No	$427
PWS2326	32 V	6 A	No	$517
PWS2721	72 V	1.5 A	No	$427

Recommended Accessories

RMU2U	Rackmount Shelf Kit for 1 or 2 Units	$155
386-7598-xx	Rackmount Cosmetic Filler Panel	$37

Recommended Service

R5	5-year Extended Warranty	$170

Another Product for Consideration

The PWS4000 Series offers greater accuracy, additional features and programmability.

Ships with Product

- Calibration Certificate
- Technical Reference Manual & Documentation on CD
- Power Cord
- 3-year Warranty

Learn more with the "Choosing the Right Power Supply for Accurate Power Delivery" application note.



DATA SHEET

360° VIEW

PWS4000 Series USB Programmable, Single Channel Power Supplies

Precision. Now available at the touch of a button. Generate the power you need with down to 1 mV/0.1 mA resolution and a basic voltage accuracy of 0.03%. Accelerate complex tests with list mode and a USB port for remote programming. Save time with a numeric keypad for fast and accurate voltage/current selection. Performance. Accuracy. Affordability. Meet your new power supply.

Product Highlights

- Linear regulation
- 0.03% basic DC voltage accuracy; 0.05% basic DC current accuracy
- USB interface for remote programming
- Less than 5 mVp-p ripple and noise
- Remote sense, list mode and 40 user-defined setup memories

The numeric keypad makes it easy to specify a precise current limit before you start your test.

PWS Series power supplies are designed to be stacked with other Tektronix bench instruments to save you valuable bench space.

Models	Output Voltage	Output Current	Programmable	Pricing (USD)
PWS4205	20 V	5 A	Yes	$922
PWS4305	30 V	5 A	Yes	$1,090
PWS4323	32 V	3 A	Yes	$922
PWS4602	60 V	2.5 A	Yes	$1,090
PWS4721	72 V	1.2 A	Yes	$922

Recommended Accessories

RMU2U	Rackmount Shelf Kit for 1 or 2 Units	$155
386-7598-xx	Rackmount Cosmetic Filler Panel	$37

Recommended Service

SILV100	5-year Extended Warranty	$170

Another Product for Consideration

The DMM Series offers accurate voltage, current and resistance measurements for AC and DC signals.

Ships with Product

- NI LabVIEW SignalExpress™ TE (LE version) Software
- Calibration Certificate
- Technical Reference Manual & Documentation on CD
- Power Cord
- 3-year Warranty

Learn more with the "Choosing the Right Power Supply for Accurate Power Delivery" application note.



DATA SHEET

2200 Programmable Single-Channel DC Power Supplies with Remote Sensing

Keithley programmable single-channel DC power supplies offer an excellent combination of performance, versatility, and ease of use, including 0.03% basic accuracy, 0.1mA measurement resolution, and keypad data entry. Select from a variety of DC power supplies with voltages from 20V to 72V.

Product Highlights

- Low noise, linear regulation
- 0.03% basic voltage output
- 0.05% basic current accuracy
- 1mV and 0.1mA output and measurement resolution
- Seven programmable output lists with up to 80 steps/list
- GPIB and USB interfaces

Series 2200 rear panel.



Remote sensing compensates for voltage drops in the test leads by extending the power supply feedback loop to the input of the load.

Model	Max Output Voltage	Max Output Current	Power	Ripple and Noise	Pricing (USD)
2200-20-5	20V	5A	100W	<1mV$_{RMS}$, <3mVP-P	$958
2200-30-5	30V	5A	150W	<1mV$_{RMS}$, <4mVP-P	$1,130
2200-32-3	32V	3A	96W	<1mV$_{RMS}$, <4mVP-P	$958
2200-60-2	60V	2.5A	150W	<1mV$_{RMS}$, <5mVP-P	$1,130
2200-72-1	72V	1.2A	86W	<1mV$_{RMS}$, <3mVP-P	$958

Recommended Accessories

CS-1638-12	Rear Panel Mating Connector, Single Channel	$20
USB-B-1	USB Cable	$14
4299-7	Fixed Rack Mount Kit	$388
KP-CI-488LPA	IEEE-488 Interface Board for PCI Bus	$486
7007-05	Double Shielded IEEE-488 Cable, 0.5m (1.6ft)	$113
7007-1	Double Shielded IEEE-488 Cable, 1m (3.2 ft)	$118
7007-2	Double Shielded IEEE-488 Cable, 2m (6.5 ft)	$131
7007-3	Double Shielded IEEE-488 Cable, 3m (10 ft)	$141
7007-4	Double Shielded IEEE-488 Cable, 4m (13 ft)	$147

Recommended Service

Model Number*-EW	1 additional year of factory warranty	$113
C/Model Number*-3Y-STD	3 calibrations within 3 years of purchase	$599
C/Model Number*-3Y-DATA	3 (ANSI-Z540-1 compliant) calibrations within 3 years of purchase	$472
C/Model Number*-5Y-STD	5 calibrations within 5 years of purchase	$694
C/Model Number*-5Y-DATA	5 (ANSI-Z540-1 compliant) calibrations within 5 years of purchase	$940

* Insert Model Number. Example: C/2200-20-5-3Y-DATA.

Ships with Product

- User Documentation and Driver CD
- Rear Panel Mating Connector
- Calibration Certificate
- Power Cord
- 3-year Warranty

Learn more with the “Understanding Linear Power Supply Specifications” application note.

DATA SHEET

Model 2231A-30-3 Triple-Channel DC Power Supply

The Model 2231A-30-3 Triple Channel DC Power Supply can output a total of 195W of power, providing the power levels needed to energize a wide range of circuits and devices for benchtop work. Two channels can supply up to 30V at 3A each; the third channel can provide up to 5V at 3A. The Model 2231A-30-1 does not compromise on performance or convenience features, offering the versatility and ease of use you need, so it can be the only DC power supply on your bench.

Product Highlights

- 195W with two 30V@3A outputs and one 5V@3A output
- All channels are isolated and programmable
- 0.06% basic voltage accuracy and 0.2% basic current accuracy
- Double output levels by connecting two channels in series or parallel
- Optional USB interface
- Fully supported by TekSmartLab™

Connect the two 30V channels in series or parallel to double the output voltage to 60V or the supplied current to 6A.

2231A-30-3 fully supported by TekSmartLab™.

Model	Max Output Voltage	Max Output Current	Power	Ripple & Noise	Pricing (USD)
2231A-30-3	CH1:30V, CH2:30V, CH3:5V	CH1:3A, CH2:3A, CH3:3V	195W	<1mV$_{RMS}$, <5mV$_{p-p}$	$650

Recommended Accessories

RMU2U	Rack Mount Kit	$155
386-7598-XX	RMU2U Rack Mount Cosmetic Filler Panel	$37
2231A-001	USB Adaptor with USB Cable	$60

Recommended Service

Model Number*-EW	1-Year KeithleyCare® Gold Plan	$57
Model Number*-5Y-EW	5-Year KeithleyCare Gold Plan	$116
C/Model Number*-3Y-STD	KeithleyCare 3-Yr Std Calibration Plan	$851
C/Model Number*-5Y-STD	KeithleyCare 5-Yr Std Calibration Plan	$1,400

* Insert Model Number. Examples: 2231A-5Y-EW, C/2200-20-5-3Y-DATA

Ships with Product

- Documentation CD
- Calibration Certificate
- Power Cord
- 3-year Warranty

Learn more with the “Diode Clipper Circuit” course.

2220/2230 Programmable Multiple Channel DC Power Supplies with Remote Sensing

DATA SHEET

Keithley programmable multi-channel DC power supplies offer an excellent combination of performance, versatility, and ease of use including fully isolated channels, fully programmable channels, and all channel measurements displayed simultaneously. Choose either the dual channel DC power supply or the triple channel DC power supply.

Product Highlights

- Dual and triple channel models
- Two 30V/1.5A channels
- One 6V/5A channel (on triple channel model)
- All channels are isolated and programmable
- USB interface, USB and GPIB on G versions
- Fully supported by TekSmartLab™

Model 2230G-30-1 rear panel.

Power two isolated circuits with isolated output channels.

Model	Max Output Voltage	Max Output Current	Power	Ripple and Noise	Pricing (USD)
2220-30-1 2220G-30-1* 2220J-30-1 * 2220GJ-30-1 *	Ch 1: 30V, Ch 2:30V	Ch1: 1.5A, Ch 2: 1.5A	45W/channel; 90W total	<1mVRMS, <3mV P-P	$983 (2220-30-1)
2230-30-1 2230G-30-1* 2230J-30-1* 2230GJ-30-1*	Ch1: 30V, Ch 2: 30V, Ch 3: 6V	Ch1: 1.5A, Ch 2: 1.5A, Ch 3: 5A	Ch 1 and Ch 2: 45W each Ch 3: 30W, 120W total	<1mVRMS, <3mV P-P	$1,180 (2220G-30-1)

*G versions include a GPIB interface; J versions for Japan.

Recommended Accessories

CS-1655-15	Rear Panel Mating Connector, Multi-Channel	$20
USB-B-1	USB Cable	$14
4299-7	Fixed Rack Mount Kit	$388

Recommended Service

Model Number*-EW	1 additional year of factory warranty	Varies
Model Number*-5Y-EW	2 additional years of factory warranty beyond the standard 3-year warranty	Varies
C/Model Number*-3Y-STD	3 calibrations within 3 years of purchase	Varies
C/Model Number*-3Y-DATA	3 (ANSI-Z540-1 compliant) calibrations within 3 years of purchase	Varies
C/Model Number*-5Y-STD	5 calibrations within 5 years of purchase	Varies
C/Model Number*-5Y-DATA	5 (ANSI-Z540-1 compliant) calibrations within 5 years of purchase	Varies

* Insert Model Number. Examples: 2220-30-1-5Y-EW, C/2220-30-1-3Y-DATA

Recommended Accessories

Additional Recommended Accessories for "G" Versions

KP-CI-488LPA	IEEE-488 Interface Board for PCI Bus	$486
7007-05	Double Shielded IEEE-488 Cable, 0.5m (1.6ft)	$113
7007-1	Double Shielded IEEE-488 Cable, 1m (3.2 ft)	$118
7007-2	Double Shielded IEEE-488 Cable, 2m (6.5 ft)	$131
7007-3	Double Shielded IEEE-488 Cable, 3m (10 ft)	$141
7007-4	Double Shielded IEEE-488 Cable, 4m (13 ft)	$147

Ships with Product

- User Documentation and Driver CD
- Rear Panel Mating Connector
- Calibration Certificate
- Power Cord
- 3-year Warranty

Learn more with the "Ensuring that Power Supply Performance Meets Your Requirements" application note.

DATA SHEET

Series 2260B Programmable DC Power Supplies

Source a wide range of voltages and currents with Series 2260B Programmable DC Power Supplies. All four supplies have constant power outputs to provide a flexible range of voltage and current output combinations. The 360W supplies can output as much as 30V or 80V or as much as 13.5A or 36A, while the 720W supplies can output twice as much current, 72A and 27A, with the same maximum voltage outputs. Series 2260B power supplies offer multiple interfaces that make them well-suited for numerous applications, including research and design, quality control, and production test.

Product Highlights

- Wide output range with constant power
- Programmable voltage/current rise and fall times
- Constant current priority setting
- Programmable output resistance
- USB, LAN, Analog Control, optional GPIB



Precisely control voltage rise time with the variable slew rate control.

Rear panel of Model 2260B-30-36 or 2260B-80-13

Model	Max Output Voltage	Max Output Current	Power	Ripple & Noise	Pricing (USD)
2260B-30-36	30V	36A	360W	<7 mV_{RMS}, <60 mV_{p-p}	$1,420
2260B-80-13	80V	13.5A	360W	<7 mV_{RMS}, <60 mV_{p-p}	$1,420
2260B-30-72	30V	72A	720W	<11 mV_{RMS}, <80 mV_{p-p}	$1,880
2260B-80-27	80V	27A	720W	<11 mV_{RMS}, <80 mV_{p-p}	$1,880

Recommended Accessories

2260-001	Accessory Kit	$36
2260-002	Simple IDC Tool	$166
2260-003	Contact Removal Tool	$12
2260-004	Basic Accessories kit	$14
2260-005	Cable for 2 units in Series connection	$43
2260-006	Cable for 2 units in Parallel connection	$43
2260-007	Cable for 3 units in Parallel connection	$66
2260B-GPIB-USB	GPIB To USB Adapter	$383
2260B-EXTERM	Extended Terminal	$112
2260B-RMK-JIS	Rack Mount Kit (JIS)	$179
2260B-RMK-EIA	Rack Mount Kit (EIA)	$179

Recommended Service

Model Number*-EW	3-year factory warranty extended to 1 additional year from date of shipment	Varies
Model Number*-5Y-EW	3-year factory warranty extended to 5 years from date of shipment	Varies
C/Model Number*-3Y-STD	KeithleyCare 3-Year Standard Calibration Plan	Varies
C/Model Number*-3Y-DAT	KeithleyCare 3-Year Calibration with Data Plan	Varies
C/Model Number*-5Y-STD	KeithleyCare 5-Year Standard Calibration Plan	Varies
C/Model Number*-5Y-DAT	KeithleyCare 5-Year Calibration with Data Plan	Varies

* Insert Model Number. Examples: 2260B-30-36-5Y-EW, C/2260B-30-36-3Y-DATA.

Ships with Product

- 2260B Basic Accessories Kit
- Test Leads
- USB Cable
- Quick Start Guide
- CD with Manuals and Software Drivers
- Power Cord
- 3-year Warranty

Learn more with the "Avoiding Inrush Current when Testing High Power LEDs with Series 2260B Power Supplies" application note.

DATA SHEET

Series 2280S Precision Measurement DC Power Supplies

Series 2280S Precision Measurement, Low Noise, Programmable DC Power Supplies are much more than just sources of clean power; they are also precision measurement instruments. They can source stable, low noise voltages as well as monitor load currents over a wide dynamic range from amps to nanoamps. The Model 2280S-32-6 can output up to 32V at up to 6A; the Model 2280S-60-3 can output up to 60V at up to 3.2A.

Product Highlights

- 10nA resolution to 6A with high accuracy, measure voltage and current with 6½-digit resolution
- Capture dynamic load currents as short as 140µs
- Output up to 192W of low noise, linear regulated power
- Programmable rise and fall times eliminate voltage overshoot and undershoot transients
- Built-in graphing simplifies analyzing trends or displaying voltage or current waveforms
- GPIB, USB, and LAN interfaces, built-in LXI web interface simplifies automated control/monitoring/data logging



Built-in graphing simplifies analyzing trends or displaying voltage or current waveforms.

Remote control or monitor the supply using its web browser over the LAN LXI interface.

KickStart software DC power supply main screen.

Model	Max Output Voltage/ Current	Output Power	Max Current Measurement Accuracy	Transient Response Time	Pricing (USD)
2280S-32-6	32V/6A	192W	±(0.05% + 10 µA)	<50µs	$1,990
2280S-60-3	60V/3.2A	192W	±(0.05% + 10 µA)	<50µs	$1,990

Recommended Accessories

2280-001	Rear Panel Mating connector and Cover	$71
2280-Test-Lead	Power Supply Test Lead Kit, 1000V, 20A Rating	$39
CA-180-3A	LAN Crossover Cable	$10
USB-B-1	USB Cable Type A to B, 1m (3.3 ft)	$14
2450-TLINK	Trigger Link cable to connect 2280S digital I/O to Trigger Link I/O on other Keithley instruments	$52
4299-8	Single Fixed Rack-Mount Kit	$312
4299-9	Dual Fixed Rack-Mount Kit	$244
4299-10	Dual Fixed Rack-Mount Kit for one 2U Graphical Display Instrument and one Series 26xx Instrument	$635
4299-11	Dual Fixed Rack-Mount Kit for one 2U Graphical Display Instrument and one Series 24xx, Series 2000, or 2U Agilent Instrument	$625

Recommended Accessories

7007-05	Double Shielded Premium IEEE-488 Interface Cables, 0.5m (1.6 ft)	$113
7007-1	Double Shielded Premium IEEE-488 Interface Cables, 1m (3.2 ft)	$118
7007-2	Double Shielded Premium IEEE-488 Interface Cables, 2m (6.5 ft)	$131
7007-3	Double Shielded Premium IEEE-488 Interface Cables, 3m (10 ft)	$141
7007-4	Double Shielded Premium IEEE-488 Interface Cables, 4m (13 ft)	$147
KP-CI-488LPA	IEEE-488.2 Interface Board for the PCI Bus	$486

Ships with Product

- KickStart software
- 2280-001 output mating connector
- LAN crossover cable
- Documentation CD
- QuickStart guide
- Calibrate Certificate
- Power Cord
- 3-year Warranty

Learn more with the "Making Low Current Measurements with a Series 2280S Precision Measurement DC Power Supply" application note.

DATA SHEET

Series 2268 850W DC Power Supplies

Series 2268 power supplies provide both analog and digital control options and a number of digital interface options and can operate in constant voltage (CV), constant current (CC), or constant power modes to address a broad array of applications. These high-efficiency, soft-starting power supplies provide reliable performance and long life. Packaged in low profile 1U high, half-rack width enclosures, they offer the highest power density in the smallest package.

Product Highlights

- Compact 1U high, half-rack wide
- 5V and 15V auxiliary outputs
- Isolated and non-isolated analog inputs and outputs
- Foldback mode with programmable delay
- Control up to 30 supplies through one interface
- LAN, USB, GPIB, RS-232, RS-485, and analog I/O are all standard

Series 2268 rear panel showing all the interfaces.



Control a 2268 supply with analog inputs and control external devices with the auxiliary outputs.

Model	Max Output Voltage	Max Output Current	Power	Ripple	Noise	Pricing (USD)
2268-20-42	20V	42A	850W	$50mV_{p-p}$	$8mV_{RMS}$	$2,500
2268-40-21	40V	21A	850W	$50mV_{p-p}$	$8mV_{RMS}$	$2,500
2268-60-14	60V	14A	850W	$50mV_{p-p}$	$8mV_{RMS}$	$2,500
2268-80-10	80V	10.5	850W	$80mV_{p-p}$	$8mV_{RMS}$	$2,500
2268-100-8	100V	8.5A	860W	$80mV_{p-p}$	$8mV_{RMS}$	$2,500
2268-150-5	150V	5.6A	850W	$100mV_{p-p}$	$10mV_{RMS}$	$2,500

Recommended Accessories

2268-HDR	Hardware to Connect Test Lead Lugs to the 2268-20-42 or 2268-40-21	$8
2268-RMK-1	Rack Mount Kit for One Series 2268 DC Power Supply	$220
2268-RMK-2	Rack Mount Kit for Two Series 2268 DC Power Supplies	$140
CA-180-3A	LAN Crossover Cable	$10
USB-B-1	USB Cable Type A to B, 1m (3.3 ft)	$14
KP-CI-488LPA	IEEE-488.2 Interface Board for the PCI Bus	$475
KUSB-488B	IEEE-488.2 USB-GPIB Interface Adapter for USB Port	$539

Recommended Accessories

7007-05	Double Shielded Premium IEEE-488 Interface Cables, 0.5m (1.6 ft)	$113
7007-1	Double Shielded Premium IEEE-488 Interface Cables, 1m (3.2 ft)	$118
7007-2	Double Shielded Premium IEEE-488 Interface Cables, 2m (6.5 ft)	$131
7007-3	Double Shielded Premium IEEE-488 Interface Cables, 3m (10 ft)	$141
7007-4	Double Shielded Premium IEEE-488 Interface Cables, 4m (13 ft)	$147

Ships with Product

- CD with user manual
- Test lead connection hardware (for 2268-20-42 and 2268-40-21 only)
- Power cord

Recommended Service

Model Number*-EW	1 additional year of factory warranty	Varies
Model Number*-5Y-EW	2 additional years of factory warranty beyond the standard 3-year warranty	Varies
C/Model Number*-3Y-STD	3 calibrations within 3 years of purchase	Varies
3Y-DATA	3 (ANSI-Z540-1 compliant) calibrations within 3 years of purchase	Varies
C/Model Number*-5Y-STD	5 calibrations within 5 years of purchase	Varies
C/Model Number*-5Y-DATA	5 (ANSI-Z540-1 compliant) calibrations within 5 years of purchase	Varies

* Insert Model Number. Examples: 2268-40-21-5Y-EW, C/2268-40-21-3Y-DATA.

DATA SHEET

2290 High Voltage Power Supplies

Series 2290 High Voltage Power Supplies facilitate high voltage device and material testing, as well as high energy physics experimentation. The Model 2290-5 5kV Power Supply provides voltage outputs up to 5000V, and the Model 2290-10 10kV Power Supply offers up to 10,000V. These supplies measure both output voltage with 1V resolution and output current with 1µA resolution.

Product Highlights

- Source voltages up to 5kV and 10kV
- 1µA current measurement resolution
- Low noise for precision sourcing and sensitive measurements; selectable filters reduce noise to less than 3mV$_{RMS}$ on the 5kV supply
- Safety interlock controls high voltage output
- GPIB programmable
- Protection module prevents damage to low voltage instrumentation

The Model 2290-PM-200 Protection Module protects low voltage measurement equipment from voltages greater than 200V.



Reverse breakdown testing of a high voltage diode using a Keithley SourceMeter® SMU instrument to measure leakage currents down to pA levels. The Model 2290-PM-200 SMU Protection Module protects the SourceMeter SMU instrument from high voltage when the diode breaks down.

Model	Max Output Voltage	Max Output Current	Power	Ripple	Pricing (USD)
2290-5	5kV	5mA	25W	3mV$_{RMS}$ maximum with filter	$3,890
2290-10	10kV	1mA	10W	1V$_{RMS}$	$4,900

Recommended Accessories

For 2290-5		
2290-5-SHV	5kV SHV Female–SHV Female Cable, 3m (10 ft)	$290
2290-5-MHV	5kV SHV Female–MHV Male Cable, 3m (10 ft)	$350
2290-5-SHVBH	5kV SHV Male Bulkhead Connector	$52
2290-5-RMK-1	Single Fixed Rack Mount Kit for 5kV Power Supply	$210
2290-5-RMK-2	Dual Fixed Rack Mount Kit for 5kV Power Supply	$230
For 2290-10		
2290-10-SHVUC	10kV SHV Male to Unterminated Cable, 3m (10ft)	$750
2290-10-SHV	10kV SHV Male–SHV Male Cable, 3m (10 ft)	$890
2290-10-SHVBH	10kV SHV Female Bulkhead Connector	$130
2290-10-RMK-1	Single Fixed Rack Mount Kit for 10kV Power Supply	$210
2290-10-RMK-2	Dual Fixed Rack Mount Kit for 10kV Power Supply	$230

Recommended Accessories

For both		
2290-PM-200	10kV Protection Module	$1,200
2290-INT-CABLE	3-Pin Connector to Unterminated Interlock Cable	$30
4299-7	Fixed Shelf Rack Mount Kit	$388
KP-CI-488LPA	IEEE-488.2 Interface Board for the PCI Bus	$486
KUSB-488B	IEEE-488.2 USB-GPIB Interface Adapter for USB port with built-in 2m (6.6 ft) cable	$539
7007-05	Double Shielded Premium IEEE-488 Interface Cable, 0.5m (1.6 ft)	$113
7007-1	Double Shielded Premium IEEE-488 Interface Cable, 1m (3.2 ft)	$118
7007-2	Double Shielded Premium IEEE-488 Interface Cable, 2m (6.5 ft)	$131
7007-3	Double Shielded Premium IEEE-488 Interface Cable, 3m (10 ft)	$141
7007-4	Double Shielded Premium IEEE-488 Interface Cable, 4m (13 ft)	$147

Ships with Product

- CD with User Manual, Software Drivers, and Accessory Information
- Power Cord

Learn more with the "Breakdown and Leakage Current Measurements on High Voltage Semiconductor Devices Using Keithley Series 2290 High Voltage Power Supplies and Series 2600B System SourceMeter Source Measure Unit (SMU) Instruments" application note.

Recommended Service

Model Number*-3Y-EW	1-Year Factory Warranty extended to 3 years from date of shipment	Varies
Model Number*-5Y-EW	1-Year Factory Warranty extended to 5 years from date of shipment	Varies
C/Model Number*-3Y-STD	KeithleyCare 3-Year Standard Calibration Plan	Varies

* Insert Model Number. Examples: 2290-5-3Y-EW, C/2290E-10-3Y-STD.

DATA SHEET

Series 2300 Portable Device Battery/Charger Simulators

Keithley's battery simulating power supplies can simulate a battery's output characteristics and its discharged state. These supplies can measure low, sleep mode load current and pulsed output load current. Dual channel models facilitate testing portable device, charge control circuitry with a battery channel and a charger simulator channel.

Product Highlights

- Optimized for battery-powered device testing
- 100nA current measurement sensitivity
- Load pulse current measurement: 33µs - 833µs
- Variable output resistance: 0 - 1Ω with 10mΩ resolution
- Measure sleep, currents, standby currents, and full load currents to determine power consumption
- Sink current to simulate a discharged battery

Model 2306 Rear Panel.



Simplified schematic of a battery and the 2302/2306.

Model	Channels	Max Output Voltage / Current	Power	Transient Response to a 10X Load Current Change	Current Sink Capacity	Pricing (USD)
2302	1	15 V / 5 A	42W	<40µs recovery time and <75mV voltage drop	3A	$2,770
2306	2	15 V / 5 A	45W	<40µs recovery time and <75 mV voltage drop	3A	$3,440
2308	2	15 V / 5 A	45W	<35µs recovery time and <90 mV voltage drop	3A	$3,140

Recommended Accessories

2306-DISP	Remote Display (2302, 2306, 2308)	$365
CS-846	Mating Output Connector	$19
SC-182	Low Inductance Coaxial Cable	$0.50/ inch
4288-1	Single Fixed Rack Mount Kit	$95
4288-2	Dual Fixed Rack Mount Kit	$133
KPCI-488LPA	IEEE-488 Interface Board for PCI Bus	$475
KUSB-488B	IEEE-488 USB-to-GPIB Interface Adapter	$539

Recommended Accessories

7007-05	Double Shielded IEEE-488 Cable, 0.5m (1.6ft)	$113
7007-1	Double Shielded IEEE-488 Cable, 1m (3.2 ft)	$118
7007-2	Double Shielded IEEE-488 Cable, 2m (6.5 ft)	$131
7007-3	Double Shielded IEEE-488 Cable, 3m (10 ft)	$141
7007-4	Double Shielded IEEE-488 Cable, 4m (13 ft)	$147

Recommended Service

Model Number*-3Y-EW	1-year factory warranty extended to 3 years from date of shipment	Varies
Model Number*-PJ-3Y-EW	1-year factory warranty extended to 3 years from date of shipment	Varies

* Insert Model Number. Example: 2302-3Y-EW.

Ships with Product

- User Documentation
- Rear Panel Mating Connector
- Calibration Certificate
- Power Cord
- 1-year Warranty

Learn more with the "Simulating Battery Impedance with the Models 2302 and 2306 Battery Simulators/ Chargers" application note.

DATA SHEET

2303/2304A High Speed Power Supplies

The Model 2303/2304A Power Supplies provide both voltage control and power consumption monitoring for automated testing of portable, battery-operated devices. They are optimized for testing battery-operated, wireless communication devices such as cellular phones that undergo substantial load changes for very short time intervals.

Product Highlights

- Ultra-fast response times to load changes
- Optimized for battery-powered device testing
- 100nA current measurement sensitivity
- Load pulse current measurement: 33µs - 833µs
- Measure sleep, standby currents, and full load currents to determine power consumption
- Sink current to simulate a discharged battery

Model 2303 or 2304A rear panel.



Keithley's high speed power supplies maintain a stable voltage during large load changes.

Model	Channels	Max Output Voltage / Current	Power	Transient Response to a 10X Load Current Change	Current Sink Capacity	Pricing (USD)
2303	Single Output	15V/3A or 9V/5A	45W	<40µs recovery time and <100mV voltage drop	2A	$2,100
2304A	Single Output	20V/5A	100W	<40µs recovery time and <100mV voltage drop	3A	$2,830

Recommended Accessories

2304-DISP	Remote Display (2303, 2304A)	$226
CS-846	Mating Output Connector	$19
SC-182	Low Inductance Coaxial Cable	$0.50/ inch
4288-1	Single Fixed Rack Mount Kit	$95
4288-2	Dual Fixed Rack Mount Kit	$133
KPCI-488LPA	IEEE-488 Interface Board for PCI Bus	$475
KUSB-488B	IEEE-488 USB-to-GPIB Interface Adapter	$539

Recommended Accessories

7007-05	Double Shielded IEEE-488 Cable, 0.5m (1.6ft)	$113
7007-1	Double Shielded IEEE-488 Cable, 1m (3.2 ft)	$118
7007-2	Double Shielded IEEE-488 Cable, 2m (6.5 ft)	$131
7007-3	Double Shielded IEEE-488 Cable, 3m (10 ft)	$141
7007-4	Double Shielded IEEE-488 Cable, 4m (13 ft)	$147

Recommended Service

Model Number*-3Y-EW	1-year factory warranty extended to 3 years from date of shipment	Varies
C/Model Number*-3Y-ISO	3 (ISO-17025 accredited) calibrations within 3 years of purchase for Models 2303, 2303-PJ*	Varies

* Insert Model Number. Examples: 2303-3Y-EW, C/2303-3Y-ISO.

Ships with Product

- User Documentation
- Rear Panel Mating Connector
- Calibration Certificate
- Power Cord
- 1-year Warranty

Learn more with the "Stabilizing Fast Transient Response Power Supply/Load Circuits" application note.

Frequency Counter/Timers

Featuring the precision and intuitive operation you've come to expect from our oscilloscopes, Tektronix counter/timers are built with performance and convenience in mind. Featuring industry-leading resolution, built-in measurement and analysis modes.

	FCA3000	FCA3100	MCA3000
Frequency Range	400 MHz, 3 GHz, 20 GHz	400 MHz, 3 GHz, 20 GHz	27 GHz, 40 GHz
Resolution	▪ 100 ps (time) ▪ 12 digits/s (freq)	▪ 50 ps (time) ▪ 12 digits/s (freq)	▪ 100 ps (time) ▪ 12 digits/s (freq)
Data Transfer	▪ 250 k Samples/sec (internal) ▪ 5 k Samples/sec (block)	▪ 250 k Samples/sec (internal) ▪ 15 k Samples/sec (block)	▪ 250 k Samples/sec (internal) ▪ 5 k Samples/sec (block)
Measurements	13 Automated Measurements Frequency, Period, Ratio, Time Interval, Time Interval Error, Pulse Width, Rise/Fall Time, Phase Angle, Duty Cycle, Vmax, Vmin, Vp-p	14 Automated Measurements Frequency, Period, Ratio, Time Interval, Time Interval Error, Pulse Width, Rise/Fall Time, Phase Angle, Duty Cycle, Vmax, Vmin, Vp-p, Totalize	13 Automated Measurements Frequency, Period, Ratio, Time Interval, Time Interval Error, Pulse Width, Rise/Fall Time, Phase Angle, Duty Cycle, Vmax, Vmin, Vp-p + An Integrated Power Meter
Analysis Modes	TrendPlot™, Measurement Statistics, Allan Deviation, Histogram	TrendPlot™, Measurement Statistics, Allan Deviation, Histogram	TrendPlot™, Measurement Statistics, Allan Deviation, Histogram
Connectivity	Rear panel: USB device port, GPIB PC communications software: NI LabVIEW SignalExpress™ Tektronix Edition (LE Version)	Rear panel: USB device port, GPIB PC communications software: NI LabVIEW SignalExpress™ Tektronix Edition (LE Version)	Rear panel: USB device port, GPIB PC communications software: NI LabVIEW SignalExpress™ Tektronix Edition (LE Version)
Starting Price	$2,310	$3,610	$9,300

Choosing Your Counter/Timer

To help you choose the right counter/timer for your needs, the most common selection criteria are listed below, along with helpful tips for determining your requirements.

1 Frequency Resolution

The frequency resolution is the smallest change the counter/timer can detect in closely spaced frequencies. The resolution is influenced by the time setting on the instrument, i.e., longer time settings (averaged) will display more digits. In general this feature is expressed as the number of digits per second shown on the instrument's display (e.g., 12 digits/s). More digits indicate a higher frequency resolution.

2 Time Resolution

For timing measurements this feature represents the smallest "time" change that the instrument can detect. Time resolution is sometimes described as "single shot" resolution and is generally measured in picoseconds, e.g., 50 ps. The lower the number, the better the time resolution feature.

3 Time Base Stability

The internal time base establishes the reference against which input signals are measured. The better the time base, the more accurate your measurements can be. Most counters employ a quartz crystal as the internal time base element which comes in 3 basic types; Room Temperature (RTXO), Temperature Compensated (TCXO) and Oven Control (OCXO). TCXO and OCXO devices are more stable and when used as the internal time base, the instrument will consistently yield accurate and reliable results.

4 Analysis Capability

When choosing your counter/timer, you should review available analysis modes, such as trend plotting, measurement statistics, histograms and modulation domain analysis to ensure your needs are met.

DATA SHEET

360° VIEW

FCA3100/3000 Series

Looking to capture small frequency and time changes? Look no further than this Timer/Counter/Analyzer. Capture small changes in your signal with industry-leading frequency and time resolution. Quickly and accurately analyze signals with 13 automated measurements and comprehensive built-in analysis modes, including measurement statistics, histograms and trending. Get unparalleled ease of use with intuitive operation and USB connectivity. It's everything you need in a Timer/Counter/Analyzer. And more.

Product Highlights

- 12 digit/sec frequency resolution
- 50 ps (FCA3100) or 100 ps (FCA3000) single-shot time resolution
- 0.001° phase resolution
- 250 k readings/sec data transfer rate to internal memory
- 13 automated frequency, time, phase and voltage measurements



See how your device is changing over time with built-in analysis modes – TrendPlot™, histograms and statistics.

Easily connect to a PC with the USB and GPIB ports.

Models	Max. Frequency	Channels	Time Resolution	Frequency Resolution	Pricing (USD)
FCA3000	400 MHz	2	100 ps	12 digit/s	$2,310
FCA3003	3 GHz	2 – 400 MHz 1 – 3 GHz	100 ps	12 digit/s	$3,380
FCA3020	20 GHz	2 – 400 MHz 1 – 20 GHz	100 ps	12 digit/s	$6,700
FCA3100	400 MHz	2	50 ps	12 digit/s	$3,610
FCA3103	3 GHz	2 – 400 MHz 1 – 3 GHz	50 ps	12 digit/s	$4,690
FCA3120	20 GHz	2 – 400 MHz 1 – 20 GHz	50 ps	12 digit/s	$7,980

Recommended Accessories

174-4401-xx	USB Host to Device Cable, 3 Feet	$10
012-0991-xx	GPIB Cable, Double Shielded	$563
012-1256-xx	BNC Male to BNC Male, 9 Feet	$97
ACD4000	Soft Carrying Case	$272
HCTEK-4321	Hard Carrying Case	$829
RMU2U	Rackmount Shelf Kit for 2 Units	$155
TVA3000	TimeView™ Modulation Domain Analysis Software	$826

Instrument Options

MS	Medium Stability OCXO Timebase, 2 X 10^{-7}	$717
HS	High Stability OCXO Timebase, 5 X 10^{-8}	$1,130
RP	Rear-panel Connectors	$166

Recommended Service

SILV200	5-year Extended Warranty (FCA3000, FCA3003, FCA3100, FCA3103)	$283
SILV400	5-year Extended Warranty (FCA3020, FCA3120)	$453

Ships with Product

- Trial Version of TimeView™ Software and NI LabVIEW SignalExpress™ TE (LE version) Software
- Calibration Certificate
- User Manual on CD
- Programmers Guide & Technical Specifications
- Power Cord
- 3-year Warranty

Learn more with the "Time and Frequency Measurements for Oscillator Manufacturers" application note.



DATA SHEET

360° VIEW

MCA3000 Series

Feature-rich. Fully loaded. No matter how you say it, this microwave timer/counter is packed with functionality. Measure up to 40 GHz signals. And, get two extra 300 MHz timer/counter ports for added versatility. Quickly and accurately analyze signals with 13 automated measurements and comprehensive analysis modes, including statistics, histograms and trending. Get unparalleled ease of use with intuitive operation and USB connectivity. Finally, fully-loaded comes standard.

Product Highlights

- 12 digit/sec frequency resolution
- 100 ps single-shot time resolution
- 250 k readings/sec data transfer rate to internal memory
- 13 automated frequency, time, phase and voltage measurements
- Integrated power meter

See how your device is changing over time with built-in analysis modes – TrendPlot™, histograms and statistics.

Easily connect to a PC with the USB and GPIB ports.

Models	Max. Frequency	Channels	Time Resolution	Frequency Resolution	Pricing (USD)
MCA3027	27 GHz	2 – 300 MHz 1 – 27 GHz	100 ps	12 digit/s	$9,300
MCA3040	40 GHz	2 – 300 MHz 1 – 40 GHz	100 ps	12 digit/s	$13,700

Recommended Accessories

174-4401-xx	USB Host to Device Cable, 3 Feet	$10
012-0991-xx	GPIB Cable, Double Shielded	$563
012-1256-xx	BNC Male to BNC Male, 9 Feet	$97
AC4000	Soft Carrying Case	$259
HCTEK-4321	Hard Carrying Case	$829
RMU2U	Rackmount Shelf Kit for 2 Units	$155
TVA3000	TimeView™ Modulation Domain Analysis Software	$826

Instrument Options

HS	High Stability OCXO Timebase, 5 X 10^{-8}	$1,170
US	Ultra High Stability OCXO Timebase, 1.5 X 10^{-8}	$2,340

Recommended Service

SILV600	5-year Extended Warranty	$675

Ships with Product

- Trial Version of TimeView™ Software and NI LabVIEW SignalExpress™ TE (LE version) Software
- Calibration Certificate
- User Manual on CD
- Programmers Guide & Technical Specifications
- Power Cord
- 3-year Warranty

Learn more with the "Measurement Statistics, Histograms and TrendPlot™ Analysis Modes" application note.

Contact TestEquity

Need more product information or ready to purchase? Contact TestEquity. We are an authorized Tektronix Partner available for your product questions and needs.

www.testequity.com	800-732-3457	ustesales@testequity.com

About TestEquity

TestEquity is a value added distributor of test and measurement equipment as well as tools and supplies for laboratories and electronics manufacturing. In business since 1971, the company provides new and selected pre-owned test equipment for sale, rent or lease. With resources that include a highly trained team of product specialists and a calibration laboratory accredited to ISO/IEC 17025 and ANSI/NCSL Z540-1 standards.

At TestEquity we've always emphasized quality, whether it is the quality of our service, the quality of our people or the quality of the overall experience you receive. In addition to providing you a vast selection of products, we simplify your purchasing options by providing technical and application support to ensure you find the perfect solution to meet your specific needs. It's just part of the way we're working to prove our value to you—every day.

TestEquity maintains its headquarters and manufacturing facilities in Moorpark, California with sales offices throughout the United States, Canada, and Mexico.

Copyright © 2015, Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

03/15 EA/RRD 48A-25025-15_TE

TESTEQUITY
Authorized Tektronix Distributor

Tektronix®